



翠谷工程有限公司 Green Valley Landfill, Limited

# South East New Territories (SENT) Landfill Extension

Monthly Environmental Monitoring & Audit Report No.2 for February 2019

March 2019

ERM

2507, 25/F One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong T: 2271 3000 F: 2723 5660 www.erm.com





### South East New Territories (SENT) Landfill Extension

### Environmental Certification Sheet EP-308/2008/B and FEP-01/308/2008/B

#### Reference Document/Plan

| Document/Plan to be Certified/Verified: | Monthly Environmental Monitoring & Audit Report No.2<br>for February 2019 for South East New Territories (SENT)<br>Landfill Extension |
|---|---|
| Date of Report:                         | 6 March 2019  |
|   |   |

#### **Reference EP Condition**

EP Condition:

Condition No. 3.4

Four hard copies and one electronic copy of monthly EM&A Report shall be submitted to the Director within 10 working days after the end of the reporting month. The EM&A Reports shall include a summary of all non-compliance (exceedances) of the environmental quality performance limits (Action and Limit Levels). The submissions shall be verified by the IEC. Additional copies of the submission shall be provided to the Director upon request by the Director.

#### ET Certification

I hereby certify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

Frank Wan, Environmental Team Leader:

(ERM Hong-Kong, Limited)

Warchitt T.

Date: 6 March 2019

#### **IEC Verification**

I hereby verify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

Fredrick Leong, Independent Environmental Checker:

h

Date: 7 March 2019

(Meinhardt Infrastructure and Environment Limited)

# South East New Territories (SENT) Landfill Extension

### Monthly Environmental Monitoring & Audit Report for February 2019

#### Environmental Resources Management

2507, 25/F, One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong Telephone: (852) 2271 3000 Facsimile: (852) 2723 5660 E-mail: post.hk@erm.com http://www.erm.com

| Client:   |  | Projec                     | ct No:      |          |   |
|---|--|----------------------------|-------------|----------|---|
| Green V   | alley Landfill Ltd.  | 0465                       | 169         |          |   |
| Summary:  |  | Date:                      |             |          |   |
|   |  | 6 Ma                       | rch 2019    |          |   |
|   |  | Approved by:<br>Marchith T |             |          |   |
| Extension   |  | •                          |             | 1        |   |
|   |  | Fran<br>Partn              | k Wan<br>er |          |   |
|   |  |                            |             |          |   |
|   |  |                            |             |          |   |
| 0   | Monthly EM&A Report No.2 (for February 2019)   | AL                         | TS          | FW       | 6 Mar 19                                    |
| Revision  | Description  | Ву                         | Checked     | Approved | Date  |
| of 'ERM Hor   | has been prepared by Environmental Resources Management the trading name<br>ng-Kong, Limited', with all reasonable skill, care and diligence within the terms<br>act with the client, incorporating our General Terms and Conditions of Business | Distrib                    | oution      |          | BSI   |
|   | ccount of the resources devoted to it by agreement with the client.  |                            | Internal    |          | OHSAS 18001:2007<br>tificate No. OHS 515956 |
| We disclaim scope of the  | any responsibility to the client and others in respect of any matters outside the above.   | $\boxtimes$                | Public      |          | BSI   |
| This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk. |  |                            | Confide     |          | ISO 9001 : 2008<br>rtificate No. FS 32515   |



| EXECUTIVE | SUMMARY  | 1  |
|-----------|--|----|
| 1         | INTRODUCTION   | 1  |
| 1.1       | BACKGROUND   | 1  |
| 1.2       | <b>PROJECT DESCRIPTION</b>                                     | 1  |
| 1.3       | SCOPE OF THE EM&A REPORT                                       | 2  |
| 1.4       | PROJECT ORGANISATION   | 2  |
| 1.5       | SUMMARY OF CONSTRUCTION WORKS                                  | 3  |
| 1.6       | SUMMARY OF EM&A PROGRAMME REQUIREMENTS                         | 4  |
| 1.7       | STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE          |    |
|           | Environmental Permit   | 5  |
| 1.8       | STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS           | 5  |
| 2         | EM&A RESULTS   | 6  |
| 2.1       | AIR QUALITY MONITORING   | 6  |
| 2.2       | NOISE MONITORING   | 8  |
| 2.3       | SURFACE WATER QUALITY MONITORING                               | 9  |
| 2.4       | LANDSCAPE AND VISUAL MONITORING                                | 10 |
| 2.5       | EM&A SITE INSPECTION   | 11 |
| 2.6       | WASTE MANAGEMENT STATUS  | 11 |
| 2.7       | IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES     | 12 |
| 2.8       | SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANC | CE |
|           | LIMIT  | 12 |
| 2.9       | SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL  |    |
|           | PROSECUTIONS   | 12 |
| 3         | FUTURE KEY ISSUES  | 13 |
| 3.1       | CONSTRUCTION PROGRAMME FOR THE COMING MONTH                    | 13 |
| 3.2       | KEY ISSUES FOR THE COMING MONTH                                | 13 |
| 3.3       | MONITORING SCHEDULE FOR THE COMING MONTH                       | 13 |
| 4         | CONCLUSION AND RECOMMENDATION                                  | 14 |

#### ANNEXES

| ANNEX A  | WORK PROGRAMME  |
|----------|---|
| ANNEX B  | ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE        |
| ANNEX C  | MONITORING SCHEDULE FOR THIS REPORTING PERIOD           |
| ANNEX D  | AIR QUALITY   |
| ANNEX D1 | CALIBRATION CERTIFICATES FOR DUST MONITORING EQUIPMENT  |
|          | 24-HOUR TSP MONITORING RESULTS                          |
| ANNEX D3 | EVENT AND ACTION PLAN FOR DUST MONITORING               |
| ANNEX D4 | METEOROLOGICAL DATA                                     |
| ANNEX E  | Noise   |
| ANNEX E1 | CALIBRATION CERTIFICATES FOR NOISE MONITORING EQUIPMENT |
|          | Noise Monitoring Results $\sim$                         |
| ANNEX E3 | EVENT AND ACTION PLAN FOR NOISE MONITORING              |
| ANNEX F  | SURFACE WATER QUALITY                                   |
|          | CALIBRATION CERTIFICATES FOR SURFACE WATER QUALITY      |
| MONITORI | NG EQUIPMENT  |
| ANNEX F2 | SURFACE WATER QUALITY MONITORING RESULTS                |
| ANNEX F3 | EVENT AND ACTION PLAN FOR SURFACE WATER QUALITY         |
| MONITORI | NG  |
| ANNEX G  | CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL     |
|          | COMPLAINTS, NOTIFICATION OF SUMMONS AND STATUS OF       |
|          | PROSECUTIONS  |
| ANNEX H  | MONITORING SCHEDULE FOR THE NEXT REPORTING PERIOD       |

#### EXECUTIVE SUMMARY

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction, operation/restoration and aftercare of SENTX Project ("the Project") in accordance with the requirements specified in the Environmental Permit (EP), updated Environmental Monitoring and Audit (EM&A) Manual, the approved Environmental Impact Assessment (EIA) Report of the Project taking account of the latest design and other relevant statutory requirements. The construction (not including works related to site clearance and preparation) of the Project commenced on 2 January 2019.

This Monthly EM&A report presents the EM&A works carried out during the period from 1 to 28 February 2019 for the Project in accordance with the updated EM&A Manual.

#### Exceedance of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Levels was recorded for construction air quality monitoring in the reporting period.

#### Exceedance of Action and Limit Levels for Noise

No exceedance of Action and Limit Levels was recorded for construction noise monitoring in the reporting period.

#### Exceedance of Action and Limit Levels for Surface Water Quality

Sampling could not be carried out for all the scheduled impact surface water quality monitoring events during the reporting period due to insufficient flow.

#### **Environmental Complaints, Summons and Prosecutions**

There were no complaints, notification of summons or prosecution recorded in the reporting period.

#### **Reporting Change**

There was no reporting change in the reporting period.

#### **Future Key Issues**

Potential environmental impacts arising from the above upcoming construction activities in the next reporting period of March 2019 are mainly associated with dust emission from the construction works and from the exposed area.

#### 1.1 BACKGROUND

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. The *Environmental Impact Assessment (EIA) Report* and the associated *Environmental Monitoring and Audit (EM&A) Manual* for the construction, operation, restoration and aftercare of the SENTX (hereafter referred to as "the Project") have been approved under the *Environmental Impact Assessment Ordinance (EIAO)* in May 2008 (Register No.: AEIAR-117/2008) (hereafter referred to as the approved EIA Report) and an Environmental Permit (EP-308/2008) (EP) was granted by the Director of Environmental Protection (DEP) on 5 August 2008.

Since then, applications for Variation of an Environmental Permit (No. VEP-531/2017) were submitted to EPD and the Variation of Environmental Permits (EP-308/2008/A and EP-308/2008/B) were granted on 6 January 2012 and 20 January 2017, respectively, as the Hong Kong SAR Government has decided to reduce the scale of the design scheme of SENTX assessed in the approved EIA Report and SENTX will only receive construction waste. In May 2018, a Further Environmental Permit (FEP) (FEP-01/308/2008/B) was granted to the SENTX's contractor, Green Valley Landfill, Limited (GVL).


ERM-Hong Kong, Limited (ERM) and Meinhardt Infrastructure and Environment Limited (Meinhardt) are commissioned to undertake the roles of Environmental Team (ET) and the Independent Environmental Checker (IEC), respectively, to undertake the EM&A activities for the Project in accordance with the requirements specified in the EP, updated EM&A Manual <sup>(1)</sup>, approved EIA Report <sup>(2)</sup> taking account of the latest design and other relevant statutory requirements.

#### 1.2 **PROJECT DESCRIPTION**

The SENTX is a piggyback landfill, occupying the southern part of the existing SENT Landfill (including its infrastructure area) and 13 ha of Tseung Kwan O (TKO) Area 137. A layout plan of the SENTX is shown in *Figure 1.1*. Under the latest design, the SENTX has a net void capacity of about 6.5 Mm<sup>3</sup> and provides an additional lifespan of about 6 years, commencing operation upon exhaustion of the SENT Landfill. The SENTX will receive construction waste only.

The key implementation milestones of the Project are indicatively summarised in *Table 1.1*. The construction works of the Project commenced on 2 January 2019.

- (1) ERM (2018). South East New Territories (SENT) Landfill Extension: Environmental Monitoring & Audit Manual
- (2) ERM (2007). South East New Territories (SENT) Landfill Extension Feasibility Study: Environmental Impact Assessment Report

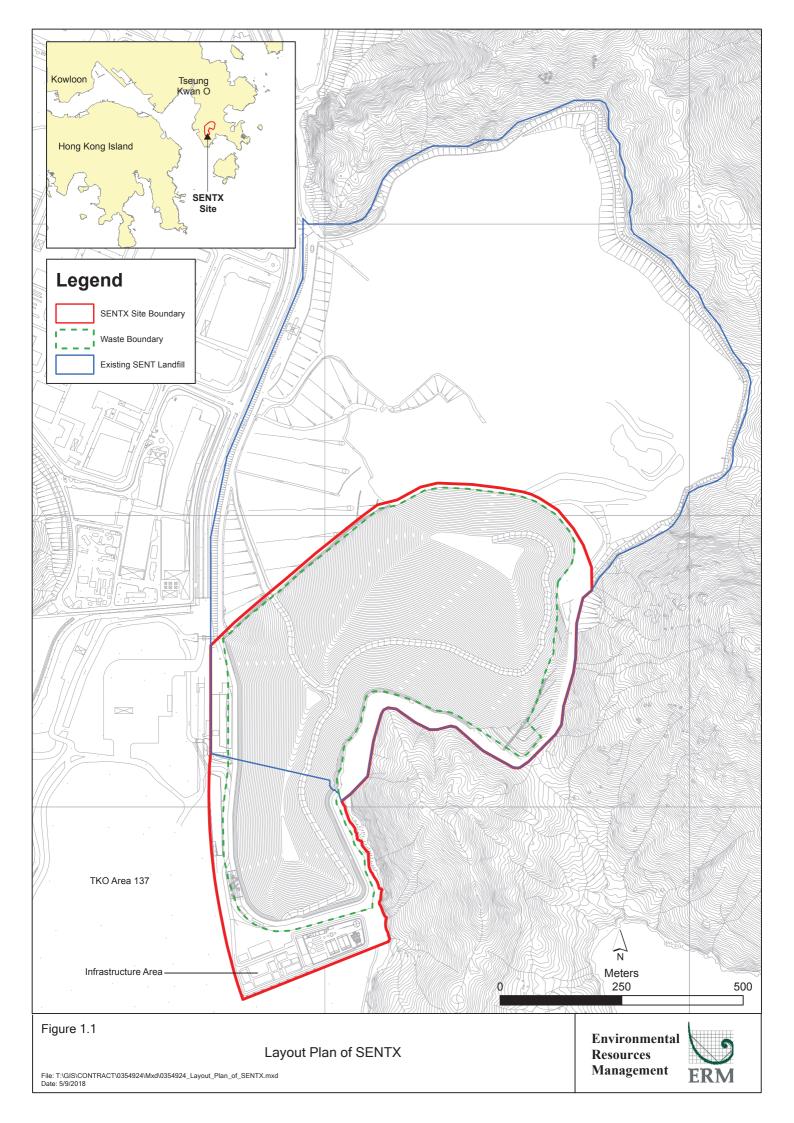

#### Table 1.1Estimated Key Dates of Implementation Programme

| Key Stage of the Project                         | Indicative Date                             |
|--|---|
| Start construction                               | 2 January 2019                              |
| Commissioning of new infrastructure facilities   | 2020  |
| Demolition of existing infrastructure facilities | 2021  |
| Start waste intake at SENTX                      | 2021 or upon exhaustion of SENT<br>Landfill |
| Estimated exhaustion date of SENTX               | 2027  |
| End of aftercare for SENTX                       | 2057  |

The major construction works of the SENTX includes:

- Site formation at the TKO Area 137 and the existing infrastructure area at SENT Landfill;
- Construction of surface and groundwater drainage systems;
- Construction of the leachate containment and collection systems;
- Construction of new leachate and landfill gas treatment facilities, site offices, maintenance yards at the new infrastructure area;
- Construction of new pipelines to transfer the leachate and landfill gas collected from the existing SENT Landfill to the treatment facilities at the new infrastructure area;
- Construction of the site access and new waste reception facilities; and
- Demolition of the facilities at the existing SENT Landfill infrastructure area.


#### 1.3 SCOPE OF THE EM&A REPORT

This is the Monthly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 to 28 February 2019 for the construction works.

#### 1.4 **PROJECT ORGANISATION**

The organization structure of the Project is presented in *Figure 1.2*.

#### Figure 1.2 Organisation Chart

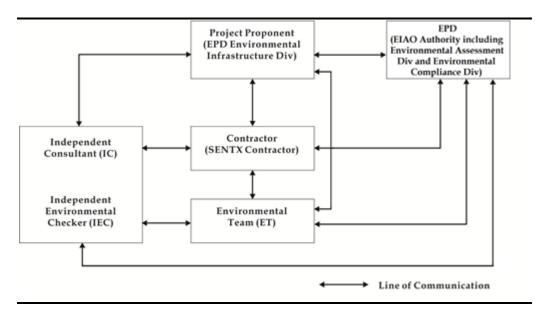

Contact details of the key personnel are summarized in *Table 1.2* below.

Table 1.2Contact Information of Key Personnel

| Party                     | Position        | Name           | Telephone |
|---------------------------|-----------------|----------------|-----------|
| Contractor                | Project Manager | Gary Barnicott | 2706 8827 |
| (Green Valley Landfill    |                 |                |           |
| Limited)                  |                 |                |           |
| Environmental Team (ET)   | ET Leader       | Frank Wan      | 2271 3152 |
| (ERM-Hong Kong, Limited)  |                 |                |           |
|                           |                 |                |           |
| Independent Environmental | IEC             | Fredrick Leong | 2859 1739 |
| Checker (IEC)             |                 |                |           |
| (Meinhardt Infrastructure |                 |                |           |
| and Environment Limited)  |                 |                |           |
|                           |                 |                |           |

#### 1.5 SUMMARY OF CONSTRUCTION WORKS

The programme of the construction is shown in *Annex A*. As informed by the Contractor, details of the major works carried out in this reporting period are listed below:

- Construction of perimeter bund;
- Site clearance;
- Erection of fencing;
- Plate load test at Leachate Treatment Plant (LTP); and
- DP4 channel improvement works.

The environmental mitigation implementation schedule is presented in *Annex B*.

#### 1.6 SUMMARY OF EM&A PROGRAMME REQUIREMENTS

The status for all environmental aspects are presented in *Table 1.3*. The EM&A requirements remained unchanged during the reporting period.

Table 1.3Summary of Status for the Environmental Aspects under the Updated EM&A<br/>Manual

| Parameters                  | Chatria   |
|-----------------------------|---|
|                             | Status  |
| Air Quality                 |   |
| Baseline Monitoring         | The results of baseline air quality monitoring were reported in |
|                             | Baseline Monitoring Report and submitted to EPD under EP        |
|                             | Condition 3.3   |
| Impact Monitoring           | On-going  |
| Noise                       |   |
| Baseline Monitoring         | The results of baseline noise monitoring were reported in       |
|                             | Baseline Monitoring Report and submitted to EPD under EP        |
|                             | Condition 3.3   |
| Impact Monitoring           | On-going  |
| Surface Water Quality       |   |
| Baseline Monitoring         | The results of baseline surface water quality monitoring were   |
| _                           | reported in Baseline Monitoring Report and submitted to EPD     |
|                             | under EP Condition 3.3  |
| Impact Monitoring           | On-going  |
| Waste Management            |   |
| Waste Monitoring            | On-going  |
| Landscape and Visual        |   |
| Baseline Monitoring         | The results of baseline landscape and visual monitoring were    |
| 5                           | reported in Baseline Monitoring Report and submitted to EPD     |
|                             | under EP Condition 3.3  |
| Construction Phase Audit    | On-going  |
| Site Environmental Audit    | ~ ~ ~   |
| Regular Site Inspection     | On-going  |
| Complaint Hotline and Email | On-going  |
| Channel                     |   |
| Environmental Log Book      | On-going  |

Taking into account the construction works, impact monitoring of air quality, noise, surface water quality and waste management were carried out in the reporting period. The monitoring schedule of air quality, noise and surface water quality monitoring are provided in *Annex C*.

The EM&A programme also involved environmental site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation measures recommended in the approved EIA Report and relevant EP submissions. To promote the environmental awareness and enhance the environmental performance of the contractors, environmental trainings and regular environmental management meetings were conducted during the reporting period, which are summarized as below:

- One environmental management meeting was held with the Contractor, ER, ET, IEC and EPD on 14 February 2019; and
- Environmental toolbox trainings on Illegal Dumping and Noise Control Ordinance were provided on 13 and 21 February 2019 respectively by the Contractor to the workers.

# 1.7 STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT

The status of statutory environmental compliance with the EP conditions under the EIAO, submission status under the EP and implementation status of mitigation measures are presented in *Table 1.4*.

Table 1.4Status of Submissions and Implementation Status of Mitigation Measures<br/>under EP

| EP        | Submission / Implementation Status       | Status                                 |
|-----------|--|--|
| Condition |  |  |
| 2.3       | Management Organisation of Main          | Accepted by EPD.                       |
|           | Construction Companies                   |  |
| 2.4       | Setting up of Community Liaison Group    | Community Liaison Group was set up.    |
| 2.5       | Submission of Detailed Landfill Gas      | Accepted by EPD on 10 January 2019.    |
|           | Hazard Assessment Report                 |  |
| 2.6       | Submission of Restoration and Ecological | To be prepared within 6 months after   |
|           | Enhancement Plan                         | the commencement of construction of    |
|           |  | the Project.                           |
| 2.7       | Setting up of Trial Nursery              | To be set up during construction       |
|           |  | phase.                                 |
| 2.8       | Advance Screen Planting                  | To be completed within 9 months of     |
|           | C C                                      | taking procession of the Project Site. |
| 2.9       | Provision of Multi-layer Composite Liner | Under implementation.                  |
|           | System                                   | _                                      |

#### 1.8 STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS

The environmental licenses and permits, including environmental permit, water discharge license, registration as chemical waste producer and construction noise permit, which are valid in the reporting period are presented in *Table 1.5*. No non-compliance with environmental statutory requirements was recorded.

Table 1.5Status of Statutory Environmental Requirements

| Description                       | Ref No.              | Status                     |
|-----------------------------------|----------------------|----------------------------|
| Environmental Permit              | EP-308/2008          | Granted on 5 August 2008   |
| Variation of Environmental Permit | EP-308/2008/A        | Granted on 6 January 2012  |
|                                   | EP-308/2008/B        | Granted on 20 January 2017 |
| Further Environmental Permit      | FEP-01/308/2008/B    | Granted on 16 May 2018     |
| Water Discharge License under     | -                    | Application submitted on   |
| Water Pollution Control Ordinance |                      | 19 June 2018               |
| (Permit Holder: Chun Wo)          |                      |                            |
| Billing Account for Disposal of   | Chit Account Number: | Approved on 28 December    |
| Construction Waste                | 5001692              | 2005                       |
| Registration as Chemical Waste    | 5213-839-C3507-10    | Issued on 23 August 2018   |
| Producer (Permit Holder: Chun Wo) |                      |                            |
| Construction Noise Permit (Permit | GW-RE0002-19         | Validity from 8 January    |
| Holder: Chun Wo)                  |                      | 2019 to 1 July 2019        |

#### EM&A RESULTS

2

The EM&A programme for the Project required environmental monitoring for air quality, noise and surface water quality as well as environmental site inspections for air quality, noise, surface water quality, waste management, and landscape and visual impacts. The EM&A requirements and related findings for each component are summarized in the following sections.

#### 2.1 AIR QUALITY MONITORING

#### 2.1.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact air quality monitoring (dust, in term of Total Suspended Particulates (TSP)) was be carried out at the two designated monitoring locations (i.e. DM1 and DM2) at a 6-day interval. As there are two existing TSP monitoring stations (i.e. TKO-A1 and TKO-A2a) currently operating by the Civil Engineering and Development Department (CEDD) to monitor the 24-hour TSP levels at the proposed dust monitoring stations for the SENTX, it is considered that the CEDD monitoring data can represent the dust condition of the SENTX during the construction phase.

The Action and Limit Levels of the air quality monitoring is provided in *Table* 2.1 below.

#### Table 2.1Action and Limit Levels for 24-hour TSP

| Monitoring Station   | Action Level           | Limit Level            |
|--|------------------------|------------------------|
| DM-1 – Site Egress of TKO Area 137 Fill Bank                               | 204 µg m- <sup>3</sup> | 260 µg m- <sup>3</sup> |
| DM-2A -Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank | 193 μg m- <sup>3</sup> | 260 μg m- <sup>3</sup> |


High volume air samplers (HVSs) in compliance with the specifications listed under Section 3.2.2 of the updated EM&A Manual were used to measure 24hour TSP levels at the CEDD dust monitoring stations. The HVSs were calibrated upon installation and thereafter at bi-monthly intervals to check the validity and accuracy of the results.

The equipment used in the impact air quality monitoring programme and monitoring locations are summarized in *Table 2.2* and illustrated in *Figure 2.1* respectively. Copies of the calibration certificates for the equipment are presented in *Annex D1*.

#### Table 2.2Dust Monitoring Details

| Monitoring<br>Station | Location                                 | Parameter | Frequency<br>and Duration | 0                                    | Equipment  |
|-----------------------|--|-----------|---------------------------|--------------------------------------|--|
| DM1                   | Site Egress of TKO<br>Area 137 Fill Bank |           | 2                         | 3, 9, 15, 21, 27<br>February<br>2019 | HVS Greasby 105<br>(S/N: 9795<br>(ET/EA/003/18)) |

ENVIRONMENTAL RESOURCES MANAGEMENT

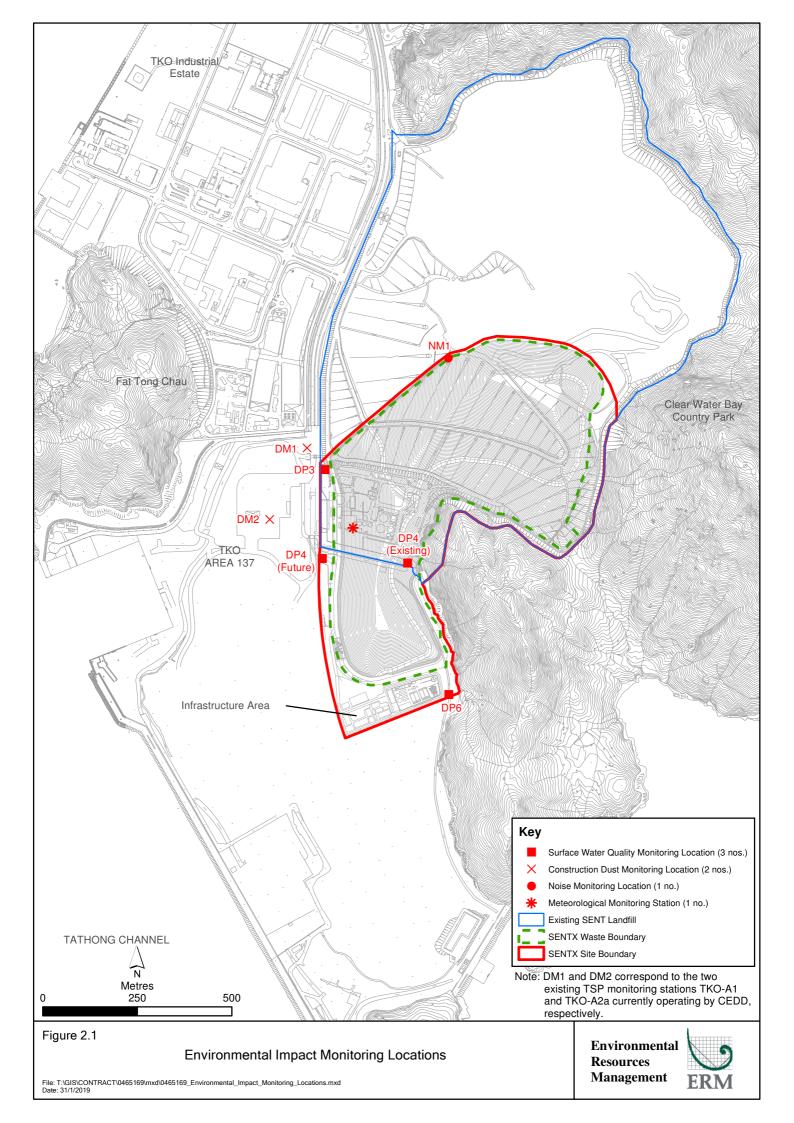

| Monitoring<br>Station | Location  | Parameter | Frequency<br>and Duration               | Monitoring<br>Dates | Equipment   |
|-----------------------|---|-----------|---|---------------------|---|
| DM2                   | Combined<br>Reception and Exit<br>Office (CREO) of<br>TKO Area 137 Fill<br>Bank |           | construction<br>phase of the<br>Project |                     | HVS Andersen<br>G1051 (S/N: 1176<br>(ET/EA/003/05)) |

#### 2.1.2 Monitoring Schedule for the Reporting Month

The schedule for air quality monitoring during the reporting period is provided in *Annex C*.

#### 2.1.3 *Results and Observations*

The monitoring results for 24-hour TSP are summarized in *Table 2.3*. The detailed monitoring results and the graphical presentation of the 24-hour TSP results at each monitoring location are provided in *Annex D2*.

#### Table 2.3Summary of 24-hour TSP Monitoring Results in the Reporting Period

| Monitoring Station   | Average 24-hr TSP<br>Concentration (μg m-³)<br>(Range in bracket) | Action Level<br>(μg/m³) | Limit Level<br>(µg/m³) |
|--|---|-------------------------|------------------------|
| DM-1 – Site Egress of TKO<br>Area 137 Fill Bank                                  | 111 (83 - 134)  | 204                     | 260                    |
| DM-2A -Combined Reception<br>and Exit Office (CREO) of<br>TKO Area 137 Fill Bank | 116 (82 - 160)  | 193                     | 260                    |

The major dust sources in the reporting period included fugitive dust emission from exposed area in SENTX, as well as nearby operations of the existing SENT landfill and the TKO Area 137 Fill Bank.

All the 24-hour TSP results were below the Action and Limit Levels at the monitoring locations in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex D*3.

#### 2.1.4 Meteorological Data

Meteorological data obtained from the on-site meteorological monitoring station at the existing SENT landfill (see *Figure 2.1*) were used for the dust monitoring and are shown in *Annex D4*. The meteorological station will be relocated to a new position for SENTX as per the updated EM&A Manual after the new infrastructure area at the SENTX is constructed. It is considered that meteorological data obtained at the existing the on-site meteorological monitoring station are representative of the Project area and could be used for the construction phase dust monitoring programme for the Project.

#### 2.2 NOISE MONITORING

#### 2.2.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact noise monitoring was conducted weekly at the monitoring location (i.e. NM1) to obtain one set of 30 minutes measurement between 07:00 and 19:00 hours on normal weekdays.

The Action and Limit Level for construction noise of the Project is provided in *Table 2.4* below.

| Tim  | e Period  | Action Level <sup>(a)</sup>  | Limit Level (b)  |  |  |  |  |  |  |  |
|------|---|--|------------------|--|--|--|--|--|--|--|
|      | 0 – 19:00 hrs on normal<br>kdays  | When one documented complaint is received from any one of the noise sensitive receivers (NSRs) | 75 dB(A) at NSRs |  |  |  |  |  |  |  |
|      |   | or   |                  |  |  |  |  |  |  |  |
|      |   | 75 dB(A) recorded at the monitoring station  |                  |  |  |  |  |  |  |  |
| Note | es:   |  |                  |  |  |  |  |  |  |  |
| (a)  | 75dB(A) along and at about 100m from the SENTX site boundary was set as the Action Level. |  |                  |  |  |  |  |  |  |  |
| (b)  | Limits specified in the GW-TM and IND-TM for construction and operational noise,          |  |                  |  |  |  |  |  |  |  |

#### Table 2.4Action and Limit Levels for Construction Noise

Noise monitoring was performed by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066) using sound level meter at the designated monitoring station NM1 (see *Figure 2.1*) in accordance with the requirements stipulated in the updated EM&A Manual. Acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. Details of the deployed equipment are provided in *Table 2.5*. Copies of the calibration certificates for the equipment are presented in *Annex E1*.

#### Table 2.5Noise Monitoring Details

respectively.

| Monitoring<br>Station <sup>(1)</sup> | Location                          | Parameter   | Frequency<br>and Duration   | Monitoring<br>Dates            | Equipment   |
|--------------------------------------|-----------------------------------|---|---|--------------------------------|---|
| NM1                                  | SENTX Site<br>Boundary<br>(North) | L <sub>eq (30 min)</sub><br>measurement<br>between 07:00<br>and 19:00 hours<br>on normal<br>weekdays<br>(Monday to<br>Saturday) | Once per<br>week for 30<br>mins during<br>the<br>construction<br>period of the<br>Project | 8, 13, 20, 27<br>February 2019 | Sound Level<br>Meter: B&K<br>2238 (S/N:<br>2285722)<br>Acoustic<br>Calibrator:<br>Quest QC-20<br>(S/N:<br>QO9090006),<br>3M AC-300<br>(S/N:<br>AC300006213) |

#### 2.2.2 Monitoring Schedule for the Reporting Month

The schedule for noise monitoring during the reporting period is provided in *Annex C*.

#### 2.2.3 Results and Observations

Results for noise monitoring are summarized in *Table 2.6*. The monitoring results and the graphical presentation of the data are provided in *Annex E2*.

#### Table 2.6Summary of Construction Noise Monitoring Results in the Reporting Period

| Monitoring Station | Measu   | ured Noise Level L | eq (30 min), dB(A)     |
|--------------------|---------|--------------------|------------------------|
|                    | Average | Range              | Action and Limit Level |
| NM1                | 51.0    | 48.0 - 52.5        | 75                     |

Major noise sources during the noise monitoring included noise from operations of the existing SENT landfill and the TKO Area 137 Fill Bank, aircrafts and insects.

No Action and Limit Levels exceedance was recorded for construction noise monitoring in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex E*3.

#### 2.3 SURFACE WATER QUALITY MONITORING

#### 2.3.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact surface water quality monitoring were carried out at the three designated surface water discharge points (i.e. DP3, DP4 and DP6) weekly to ensure that the SENTX will not cause adverse water quality impact. The Action and Limit Levels of the surface water quality impact monitoring are provided in *Table 2.7*.

#### Table 2.7Action and Limit Levels for Surface Water Quality

| Parameters | Action Level |             | Limit Level  |             |
|------------|--------------|-------------|--------------|-------------|
|            | DP3          | DP4 & DP6   | DP3          | DP4 & DP6   |
| DO         | < 5.13 mg/L  | < 5.80 mg/L | < 4.35 mg/L  | < 5.42 mg/L |
| SS         | > 209.3 mg/L | > 11.7 mg/L | > 217.0 mg/L | > 12.7 mg/L |
| pН         | > 8.88       | > 8.39      | > 9.28       | > 8.40      |

The locations of the monitoring stations under the Project are shown in *Figure* 2.1. All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the surface water quality monitoring programme. Calibration for a DO meter was carried out before measurement according to the instruction manual of the equipment model. Details of the equipment used in the impact surface water quality monitoring works are provided in

*Table 2.8.* Copies of the calibration certificates for the equipment are presented in *Annex F1*.

#### Table 2.8Impact Surface Water Quality Monitoring Details

| Monitoring<br>Station | Location                             | Frequency | Monitoring<br>Dates       | Parameter    | Equipment               |
|-----------------------|--------------------------------------|-----------|---------------------------|--------------|-------------------------|
| DP3                   | Surface water<br>discharge point DP3 | Weekly    | 8, 13, 20, 27<br>February | • pH<br>• DO | YSI<br>Professional     |
| DP4                   | Surface water<br>discharge point DP4 | -         | 2019                      | • SS         | DSS (S/N:<br>15H102620/ |
| DP6                   | Surface water<br>discharge point DP6 |           |                           |              | 15H103928)              |

#### 2.3.2 Monitoring Schedule for the Reporting Month

The schedule for water quality monitoring during the reporting period is provided in *Annex C*.

#### 2.3.3 Results and Observations

A total of 4 monitoring events for impact surface water quality monitoring were scheduled at all designated monitoring stations during the reporting period. However, sampling could not be carried out for all the scheduled events during the reporting period due to insufficient flow. Details of impact water quality monitoring events are provided in *Annex F2*. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex F3*.

#### 2.4 LANDSCAPE AND VISUAL MONITORING

#### 2.4.1 Monitoring Requirements

According to the updated EM&A Manual of the Project, the monthly landscape and visual audit was conducted on 13 February 2019 to monitor the implementation of the landscape and visual mitigation measures during construction phase.

All relevant environmental mitigation measures listed in the approved EIA Report and the EM&A Manual and their implementation status are summarised in *Annex B*.

#### 2.4.2 Results and Observations

The Contractor has implemented environmental mitigation measures as stated in the approved EIA Report and the EM&A Manual.

Regarding the landscape and visual audit, the Contractor was reminded to identify the topsoil to be generated from the construction works and plan for the storage and re-use of the topsoil where practical. The Contractor shall consider the mitigation measures during the design phase, including the preparation of the Construction Drawings and Detailed Landscape Design Drawings. In addition, the Contractor was reminded to complete the advance screen planting works within 9 months of taking possession of the SENT Site (i.e. by September 2019).

#### 2.5 EM&A SITE INSPECTION

Site inspections were carried out on a weekly basis with the Contractor, IEC and ER to monitor the implementation of proper environmental pollution control and mitigation measures for air quality, noise, surface water quality and waste management under the Project. In the reporting period, 4 site inspections were carried out on 8, 14, 21 and 28 February 2019.

Key observations during the site inspections are summarized in *Table 2.9*.

Table 2.9Key Observations Identified during the Site Inspection in this Reporting<br/>Month

| Inspection Date  | Environmental Observations and Recommendations   |
|------------------|--|
| 8 February 2019  | -  |
| 14 February 2019 | • The Contractor shall display a NRMM label to the roller at Cell X1 perimeter bund.   |
|                  | • The Contractor shall display chemical labels to the chemicals and keep daily record of the WetSep near the Chun Wo's vehicle entrance.           |
|                  | • The Contractor shall display chemical label to the chemical at wheel washing facilities.   |
|                  | • The Contractor shall clear the general refuse near the Chun Wo's vehicle entrance.   |
| 21 February 2019 | • The Contractor shall remove the wash-water at the wheel washing facilities regularly to avoid overflow.  |
|                  | • The Contractor shall keep the road near the vehicle exit clear of dusty materials.   |
|                  | • The Contractor shall clear the general refuse at Cell X1 west.   |
| 28 February 2019 | • The Contractor shall conduct activities related to dusty materials, i.e. handling of cement in an enclosed area to avoid fugitive dust emission. |
|                  | • The Contractor shall remove the wash-water and silt at the wheel washing facilities regularly to avoid overflow.                                 |
|                  | • The Contractor shall clear the general refuse at Cell X1 perimeter bund.   |

The Contractor has rectified all of the observations identified during environmental site inspections in the reporting period.

#### 2.6 WASTE MANAGEMENT STATUS

The Contractor has registered as chemical waste producer under the Contract. Sufficient numbers of receptacles were available for general refuse collection and sorting.

As informed by the Contractor, waste generated during this reporting period include mainly inert C&D materials. Reference has been made to the waste

flow table prepared by the Contractor. The quantities of different types of wastes and imported fill materials are summarised in *Table 2.10*.

Table 2.10Quantities of Different Waste Generated and Imported Fill Materials

| Month/<br>Year  | Inert C&D<br>Materials <sup>(a)</sup><br>(in '000m <sup>3</sup> )                        | Imported<br>Fill <sup>(b)</sup><br>(in '000m <sup>3</sup> ) | Inert<br>Construction<br>Waste Re-<br>used<br>(in '000m <sup>3</sup> ) | Non-inert<br>Construction<br>Waste <sup>(c)</sup><br>(in '000m <sup>3</sup> ) | Recyclable<br>Materials <sup>(d)</sup><br>(in '000kg) | Chemical<br>Wastes<br>(in '000kg) |  |  |  |  |  |  |
|---|--|---|--|---|---|-----------------------------------|--|--|--|--|--|--|
| 1 - 28 Feb 19 0.008 0 0 0.005 0 0                         |  |   |  |   |   |                                   |  |  |  |  |  |  |
| Notes:  | Notes:   |   |  |   |   |                                   |  |  |  |  |  |  |
| (a) Inert c   | (a) Inert construction wastes include hard rock and large broken concrete, and materials |   |  |   |   |                                   |  |  |  |  |  |  |
| dispos  | disposed as public fill. Density assumption: 1.6 (kg/L) for public fill                  |   |  |   |   |                                   |  |  |  |  |  |  |
| (b) Imported fill materials include sand and public fill. |  |   |  |   |   |                                   |  |  |  |  |  |  |
| . ,   |  |   |  |   |   |                                   |  |  |  |  |  |  |

(d) Recyclable materials include metals, paper, cardboard, plastics and others.

#### 2.7 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

A summary of the Environmental Mitigation Implementation Schedule is presented in *Annex B*. The necessary mitigation measures were implemented properly for the Project.

# 2.8 SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANCE LIMIT

Results for air quality monitoring (24-hour TSP) complied with the Action and Limit Levels in the reporting period. No Action and Limit Levels exceedances were recorded for construction noise monitoring. Impact surface water quality monitoring could not be carried out for all the scheduled events during the reporting period due to insufficient flow.

Cumulative statistics on exceedances is provided in *Annex G*.

2.9 SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

> There were no complaints, notification of summons or prosecution recorded in the reporting period.

Statistics on complaints, notifications of summons, successful prosecutions are summarised in *Annex G*.

#### 3 FUTURE KEY ISSUES

#### 3.1 CONSTRUCTION PROGRAMME FOR THE COMING MONTH

As informed by the Contractor, the major works for the Project in March 2019 will be:

- Construction of perimeter bund;
- Site clearance;
- Erection of fencing;
- Plate load test at LTP;
- DP4 channel improvement works;
- Construction of sediment tank;
- Construction of foundation at infrastructure area; and
- Construction of manhole MH1.

#### 3.2 Key Issues for the Coming Month

Potential environmental impacts arising from the above upcoming construction activities in the next reporting period of March 2019 are mainly associated with dust emission from the construction works and in the exposed area. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

#### 3.3 MONITORING SCHEDULE FOR THE COMING MONTH

The tentative schedules for environmental monitoring in March 2019 are provided in *Annex H*.

#### CONCLUSION AND RECOMMENDATION

4

This EM&A Report presents the findings of the EM&A activities undertaken during the period from 1 to 28 February 2019 in accordance with the updated EM&A Manual and the requirements of the Environmental Permit (*EP*-308/2008/B).

Air quality (24-hour TSP), noise and water quality (DO, pH and SS) monitoring were carried out in the reporting period. Results for air quality monitoring (24-hour TSP) complied with the Action and Limit Levels in the reporting period. No Action and Limit Levels exceedances were recorded for construction noise monitoring. Impact surface water quality monitoring could not be carried out for all the scheduled events during the reporting period due to insufficient flow.


Environmental site inspections were carried out during the reporting period. Recommendations on remedial actions were given to the Contractor for the deficiencies identified during the site inspections.

There were no complaints, notification of summons or prosecution recorded in the reporting period.

The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures. Annex A

## Work Programme

|                                 | BS Path Activity Activity Name   | Dur Star  | Finish Tota<br>Floa  | tal Predecessor Details<br>pat  | Successor Details   | Q2 | 018<br>  Q3   C             | Q4 Q1       | 2019<br>Q2 | Q3 Q4 | 20<br>Q1 Q2 | 20<br>Q3 Q4 | Q1                               | 2021<br>Q2 0 | 3 Q4     | Q1 Q2  | 2022<br>Q3 Q4           | Q1 202  | 3<br>Q2 Q3                            |
|---------------------------------|--|---|--|---|---|----|-----------------------------|-------------|------------|-------|-------------|-------------|----------------------------------|--------------|----------|--|-------------------------|---------|---------------------------------------|
| 336<br>337<br>338<br>339        |  |   |  |   |   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 340<br>341<br>342<br>343        |  |   |  |   |   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 344<br>345                      |  |   |  |   |   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 346<br>347<br>348<br>349        |  |   |  |   |   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 350<br>351<br>352               | SA2.5 Construction (Initial Works)   | 1153 12-Apr-1   | 07-Jun-21 70;  | 15  |   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 353<br>354<br>355               | SA2.5.02 Advance Works & Site Establishment         2           SA2.5.02.01 Site Establishment & Mobilization         2  | 1148         12-Apr-18           333         12-Apr-18                            | 02-Jun-21 35<br>10-Mar-19 820  | 5   | 52-1300: FS, M 3. 1: FS, M 3. 2: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 356<br>357<br>358               | 5.02.01 52-1200 Temporary Office for Employer / ER / IC  | 60 10-Oct-18  | 08-Dec-18 0  | 83       11-1300: FS, 11-1400: FS, 11-1500: FS         0       23-1300: FS         20       52-1000: FS, 52-1100: FS  | 52-1300: FS, M 3. 1: FF       -         11-1700: SS, M 3. 1: FS         32-1500: FS, M10. 1: FS -26, M10. 2: FS -13, M10. 3: FS   |    |                             |             | 3          |       |             |             |                                  |              |          |  |                         |         |                                       |
| 359<br>360<br>361               |  | 25 31-Dec-18  |  | IO         IO           IO         11-1100: FS, 11-1200: FS           I5         11-1100: FS, 11-1200: FS   | 52-1600: FS<br>52-1600: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 362<br>363<br>364               | 5.02.02       52-1600       Site inspection, Review of Condition Survey Report         SA2.5.02.03       Site Survey & Investigation Works for Parts X3, X4 & X5                                       | 50 12-Apr-18  | 31-May-18 110  | 10       52-1500: FS, 52-1400: FS         03       11-1300: FS, 11-1400: FS, 11-1500: FS  | 32-1500: FS<br>52-1900: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 365<br>366<br>367               | 5.02.03       52-1900       Site inspection, Review of Condition Survey Report         SA2.5.02.04       Environmental Monitoring       6  | 25 07-May-18<br>975 02-Oct-18   | 31-May-18 110<br>02-Jun-21 35  |   | 52-1900: FS<br>32-1500: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 368<br>369<br>370               | 5.02.04 52-2100 Installation of Monitoring Stations & Wells (GP & GW) on Buttress Wall   | 120 02-Oct-18   | 3     29-Jan-19     0       4     29-Jan-19     0       5     30-Dec-18     0  |   | 52-2200: SS 60<br>52-2200: SS 60<br>11-1100: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 371<br>372<br>373               | SA2.5.03 Civil Engineering Works<br>SA2.5.03.0 Buttress Wall   | 748         13-Jan-19           475         02-Mar-19                             | 29-Jan-21 834<br>18-Jun-20 83  | 3   | 12-1400: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 374<br>375<br>376               | 5.03.0     53-1100     Diversion of SENT Landfill Gas Pipe   | 45 07-Feb-20  | 22-Mar-20 96   | <ul> <li>6 11-1300: FS, 23-2500: FS, 53-3000: FS, 31-1200: FS, 11-1400: FS</li> <li>6 23-2500: FS, 53-1000: FS</li> <li>3 11-1300: FS, 23-2500: FS, 53-3000: FS, 11-1400: FS</li> </ul>   | 53-1100: FS, 53-1300: FS, 53-3100: FS, M 3. 5: FS -150, M 3.<br>7: FS<br>53-1300: FS, 54-4000: FS, M 3. 3: FS<br>53-1300: FS, 53-3100: FS, M 3. 7: FS, M 3. 6: FS -200  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 377                             | 5.03.0     53-1300     Install Landfill Gas Pipe on Buttress Wall  | 75 05-Apr-20  | •  | 3 41-1500: FS, 53-1100: FS, 53-1200: FS, 53-1000: FS  | 54-4000: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 379                             | 5.03.1 53-1400 Earth bund (Eastern)  | 90 04-Aug-15  | 01-Nov-19 9  | <ul> <li>11-1100: FS, 23-2500: FS, 53-4200: FS, 53-2800: FS</li> <li>11-1100: FS, 23-2500: FS, 53-2800: FS</li> </ul>   | 53-2000: FS, 53-2300: FS, 53-3400: FS, 63-1000: FS, 63-1100: FS, 63-1200: FS, 63-1300: FS, M 4. 2: FS 53-2000: FS, 53-2200: FS, 53-2300: FS, 53-3400: FS, 53-2400: FS, 53-240: FS, 53-240: FS, 53-240: FS, 53-240: FS, 53-240: FS, 53-240: FS, 53-2400: FS, 54-2400: FS, 54-2400: FS, 54-2400: FS, 54-2400: FS, 54-2400: FS, |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 381                             | 5.03.1 53-1600 Earth bund (Western)  | 90 13-Jan-1   | 12-Apr-19 417  | 17 11-1100: FS, 23-2500: FS<br>11-1100: FS, 23-2500: FS   | 53-3700: FS, 53-3800: FS<br>53-1900: FS, 53-2000: FS, 53-2200: FS, 53-3800: FS<br>53-2000: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 383                             | 5.03.1 53-1800 Site Formation  | 90 13-Jan-19  | 12-Apr-19 217  | 12       11-1100: FS, 23-2500: FS, 31-1300: FS         17       53-1800: FS, 53-1600: FS  | 53-2000: FS, 63-1100: FS, 63-1200: FS, 63-1300: FS, M 4. 1:<br>FS -45<br>53-2100: FS, 53-2200: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 385                             | 5.03.1     53-2100     Protective Stone Laying & Leachate Collection Pipe  | 75 16-Mar-20  | 29-May-20 214  | <ul> <li>4 41-1500: FS, 53-1400: FS, 53-1500: FS, 53-1600: FS, 53-1700: FS</li> <li>4 53-2000: FS, 41-1500: FS, 53-1900: FS</li> </ul>  | 53-2100: FS<br>32-1500: FS, 54-2800: FS, M 4. 3: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 387<br>388<br>389               | 5.03.1     53-2300     Install Landfill Gas Pipe on earth bund   | 55 02-Nov-1   | 26-Dec-19 258  | 19       53-1500: FS, 53-1600: FS, 41-1500: FS, 53-1900: FS         58       41-1500: FS, 53-1400: FS, 53-1500: FS         56       23-2500: FS, 54-1000: SS  | 54-2800: FS<br>54-4000: FS<br>54-2800: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 390<br>391<br>392               | SA2.5.03.4       Landfill Cell 4       6         5.03.4       53-2500       Provide Temporary Leachate Pipe on Cell 4 Area       6         SA2.5.03.5       Drainage - Surface Run-Off       6       6 | 30         09-Jul-2           30         09-Jul-2           740         16-Jan-15 | 0 07-Aug-20 144<br>0 07-Aug-20 144<br>0 24-Jan-21 835  | 14 23-2500: FS, 63-2600: SS -90   | 54-2800: FS, M 3. 3: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 393<br>394<br>395               | 5.03.5         53-2600         Construct Cut-Off Channel 12A           5.03.5         53-2700         Connect Cut-Off Channel 12A to DP6   | 60         16-Jan-19           20         17-Mar-19                               | 16-Mar-19 9  | 9       11-1100: FS, 23-2800: FS         9       53-2600: FS, 31-1400: FS, 23-1900: FS  | 53-2700: FS<br>53-2800: FS<br>53-1400: FS, 53-1500: FS, 53-2900: FS, 63-1000: FS,<br>63-1900: FS, M 3, 3: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 396<br>397                      | 5.03.5 53-3000 Cut-Off Channel C4 Diversion to Cut-Off Channel 17-2  | 45 16-Jan-19  |  | 3 11-1300: FS, 23-2800: FS  | 63-1900: FS, M 3. 3: FS<br>53-4200: FS<br>53-1000: FS, 53-1200: FS<br>53-3200: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 398           399           400 | 5.03.553-3200Temporary Diversion Cut-Off Channel X5 to 12A5.03.553-3300Culvert X5 (5m long) & Perm Connection of Cut-Off Channel X5  | 20 04-Jul-20<br>30 26-Dec-20  | 23-Jul-20 289<br>24-Jan-21 134   | 39       53-1000: FS, 53-1200: FS         39       53-3100: FS, 23-1900: FS         34       53-4100: FF, 63-1900: FS, 53-3200: FS         34       53-4100: FF, 63-1900: FS, 53-3200: FS   | 53-3200: FS<br>53-3300: FS, M 3. 4: FS<br>32-1500: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 401<br>402<br>403               | 5.03.553-3500Construct Perimeter Channel X6 on Eastern Bund of Cell 25.03.553-3600Construct Perimeter Channel X6 Eastern Bund of Cell 3  | 50 20-Feb-20<br>50 09-Jun-20  | 09-Apr-20 189<br>28-Jul-20 129   | 19       53-1400: FS, 53-1500: FS         19       63-1000: FS, 53-3400: FS         19       63-1900: FS, 53-3500: FS   | 53-3500: FS<br>53-3600: FS<br>53-3900: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 404<br>405<br>406               | 5.03.5 53-3800 Perimeter Channel (X9B) at Cell 1 Southern & Western Bund   | 45 25-Jul-1   | · ·  | 14       53-1500: FS         44       53-1500: FS, 53-1600: FS         29       11-1100: FS, 23-1900: FS, 53-3600: FS   | 53-4000: FF, 53-4100: FF, 53-6000: FS, M 9. 1: FS -90, M 9.   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 407                             |  |   |  | 29       11-1100: FS, 23-1900: FS, 11-1200: FS, 53-3900: FF         29       11-1100: FS, 11-1200: FS, 23-1900: FS, 53-3900: FF   | 2: FS<br>53-6000: FS, M 9. 3: FS -90, M 9. 4: FS<br>53-3300: FF, 53-6000: FS, M 9. 1: FS -90, M 9. 2: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 409<br>410                      | SA2.5.03.6       Drainage - Ground Water         5.03.6       53-4200         Construct Groundwater Collection Pipe along Cells X1 & X2 Eastern Bund   | 200 26-May-19<br>70 26-May-19   | 0 11-Dec-19 209<br>03-Aug-19 9   | 11-1100: FS, 23-1600: FS, 53-2900: FS   | 53-1400: FS, 53-4300: FS, 63-1000: FS, 63-1900: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 411<br>412<br>413               | 5.03.6 53-4400 Construct Groundwater Collection Pipe along Intercell Bund X2/X3  | 50 23-Sep-19  | 22-Sep-19 159<br>11-Nov-19 209<br>11-Dec-19 209  | 9 53-4300: FS   | 53-4400: FS, 63-1900: FS<br>53-4500: FS, 63-1200: FS<br>52-2300: FS, M 9. 5: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 414<br>415<br>416               | SA2.5.03.7Utilities - Distribution within New Infrastructure AreaO5.03.753-4600Power Supply HV Works (Transformer & HV switchgear)O5.03.753-4700Power Distribution, LV Power Supply WorksO             | 391         11-Aug-19           5         30-Jun-20           2         05-Jul-20 | 04-Sep-20         276           04-Jul-20         0           006-Jul-20         0                                   | 76         4           0         54-3000: FS           0         54-3100: FS, 12-1200: FS   | 12-1200: FS<br>12-1000: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 417<br>418                      | 5.03.7     53-4900     Sewerage (Discharge to Site Boundary)   | 60 07-Jul-2   | 0 04-Sep-20 271  | 71       54-1000: FS, 54-3100: FS, 54-3300: FS, 54-4100: FS         71       54-1000: FS, 54-4100: FS, 54-4600: FS  | 12-1100: FS, 53-6100: FS<br>12-1100: FS, 53-6100: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 419<br>420<br>421               | 5.03.7         53-5100         Fire Services           5.03.7         53-5200         Water Supply (Fresh & Salt)  | 115 12-Mar-20<br>115 12-Mar-20  | 04-Jul-20 2<br>04-Jul-20 338   | 88 53-6600: FS, 53-6700: FS   | 12-1100: FS, 32-2100: FS<br>12-1000: FS<br>12-1100: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 422<br>423<br>424               | 5.03.7       53-5400       Gas Network (LFG to LTP)         SA2.5.03.8 Utilities - Works Associated with Utilities Undertakers   | 15 22-Jun-20<br>703 27-Feb-19   | 24-Sep-19 622<br>06-Jul-20 176<br>29-Jan-21 129<br>30-May-20 43  | 26 54-1000: FF<br>29 2  | 12-1100: FS<br>54-2800: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 425 426                         | 5.03.8.U1 53-5500 Excavate Trench for CLP Cable  | 100 13-May-19   | 30-May-20 43<br>20-Aug-19 194  | 23-2900: FS   | 53-5800: FS, 54-1000: SS, 54-4100: SS, 54-4600: SS, M10.<br>1: FS -60, M10. 2: FS -30, M10. 3: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 427<br>428<br>429               | 5.03.8.U1 53-5700 CLP Cable Laying (from CLP Substation to Site Boundary)  | 200 27-Feb-19   | 30-May-20         43           14-Sep-19         229           30-Apr-20         0                                   |   | 54-1000: FF, 54-4100: FF, 54-4600: FF         54-3000: FS         53-5600: FS, 54-3000: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 430<br>431<br>432               | <u>SA2.5.03.8.U2 DSD</u>   | 147 05-Sep-20   | 29-Jan-21 129  | 29 53-4100: FS, 53-4000: FS, 53-3900: FS  | 53-5800: FF 15<br>32-1500: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 433<br>434<br>435               | 5.03.8.U2 53-6100 Connection to Foul Drain System SA2.5.03.8.U3 Telecom  | 5 05-Sep-20<br>100 13-May-19  |  | 71 53-4800: FS, 53-4900: FS   | 32-1500: FS<br>53-6400: FS, 54-1000: SS, 54-4100: SS, 54-4600: SS, M10.   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 436                             | 5.03.8.U3     53-6300     Backfill Trench after PCCW Cable Laying  | 10 11-Aug-1   | 20-Aug-19 327  | 27 53-6400: FS  | 1: FS -40, M10. 2: FS -20, M10. 3: FS         54-1000: FF, 54-4100: FF, 54-4600: FF         53-5300: FS, 53-6300: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 438<br>439                      | SA2.5.03.8.U4     WSD       5.03.8.U4     53-6500       Install Watermain & Piping for Water Supplies  | 304         13-May-19           60         13-May-19                              | 11-Mar-20 338<br>11-Jul-19 216   | 88<br>6 23-2900: FS   | 53-6600: FS, 53-6700: FS, 53-6800: FS, 53-6900: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 440<br>441<br>442               | 5.03.8.U4         53-6700         Connection for Salt Water           5.03.8.U4         53-6800         Connection for Fire Services   | 30         11-Feb-20           30         11-Feb-20                               | 11-Mar-20 338<br>11-Mar-20 2   | 88       53-6500: FS, 32-2300: FS         88       53-6500: FS, 32-2300: FS         82       53-6500: FS, 32-2300: FS         7       F3 (500: FS, 32-2300: FS)   | 53-5200: FS<br>53-5200: FS<br>53-5100: FS<br>54-2700: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 443<br>444<br>445<br>445        | SA2.5.03.8.U5     HyD Lighting       5.03.8.U5     53-7000       Installation of Public Street Lighting / Handover   | 120 07-Jul-20<br>120 07-Jul-20  | 03-Nov-20 216  | 6 54-4100: FS, 54-4600: FS, 54-1000: FS   | 54-2700: FS, 54-3900: FS<br>32-1500: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 447<br>448                      | SA2.5.04.A Part X1 Area A  | 554 31-Dec-18   | 06-Jul-20 36   |   | 32-2100: FS, 53-2400: SS, 53-4800: FS, 53-4900: FS, 53-5000: FS, 53-5400: FF, 53-7000: FS, 68-1700: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 449<br>450                      |  |   |  | 54-1800: FF         4       23-1300: FS, 11-1100: FS         6       23-1300: FS, 23-5200: FS, 12-1000: FF, 11-1100: FS   | 32-1500: FS, M 5.11: FS -30, M 5.12: FS, 54-1000: FF, 54-1800: FS<br>32-2200: FS  |    |                             |             |            |       |             | • • • • • • |                                  |              |          |  |                         |         |                                       |
| 451<br>452                      |  | · .   |  | 4       23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1700: SS 60         4       23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1300: SS 60   | 32-2100: FS, M 5. 4: FS -135, M 5. 5: FS, 12-1000: FS,<br>54-1400: SS 60<br>32-2100: FS, M 5.10: FS, 12-1000: FS, 54-1600: SS 60  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 453<br>454                      |  |   |  | <ul> <li>4 23-1300: FS, 23-5200: FS, 11-1100: FS</li> <li>4 23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1400: SS 60</li> </ul>  | 32-2100: FS, M 5. 1: SF 30, M 5. 2: SF 150, M 5. 3: FS,<br>54-1700: SS 60<br>32-2100: FS, M 5. 6: FS -135, M 5. 7: FS, 12-1000: FS,<br>32-2200: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 455<br>456                      | 5.04.A     54-1700     Maintenance Building & Area   |   |  | <ul> <li>4 23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1500: SS 60</li> <li>4 23-1300: FS, 11-1100: FS, 54-1100: FS</li> </ul>  | 32-2200: FS         32-2100: FS, M 5. 8: FS -135, M 5. 9: FS, 12-1000: FS, 54-1300: SS 60         32-1500: FS, M 5.11: FS -30, M 5.12: FS, 54-1000: FF,   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 457<br>458                      | 5.04.A 54-1900 Waste Oil Tanks   | 90 08-Apr-20  | 06-Jul-20 36   | <ul> <li>23-1300: FS, 23-5200: FS, 12-1000: FF, 11-1100: FS</li> <li>23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1800: FS</li> </ul>  | 54-2000: FS<br>32-2200: FS<br>32-2100: FS, M 5.10: FS, 12-1000: FS, 54-4400: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 459<br>460<br>461               | SA2.5.04.B Part X1 Area B<br>SA2.5.04.B.1 BioPlant Building  | 890 31-Dec-18<br>330 17-Jan-19  | 07-Jun-21 0<br>12-Dec-19 243   |   | 32-2100: FS, M 3.10. FS, 12-1000. FS, 54-4400. FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         | · · · · · · · · · · · · · · · · · · · |
| 462<br>463                      | SA2.5.04.B.2 Leachate Treatment Plant  | 589 31-Dec-18   | 10-Aug-20 21   | 31-1000: FS   | 32-2100: FS, 32-2200: FS, M 6. 2: FS -165, M 6. 3: FS<br>54-2300: FS, 54-2400: FS, 54-2500: FS, 64-1100: FS, M 6. 1:<br>SF 30, M 6. 4: FS -137, M 6. 5: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 464                             |  |   |  | <ul> <li>41-2100: FS, 41-1800: FS, 22-2100: FS, 54-2200: FS, 11-1100: FS</li> <li>41-2400: FS, 54-2200: FS</li> </ul>   | SF 30, M 6. 4: FS -137, M 6. 5: FS<br>12-1000: FS 60, 32-1900: FS, 54-2600: FS, M 6. 8: FS -110,<br>M 6. 9: FS, 32-2200: FS<br>54-2600: FS, M 6. 6: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 466<br>467<br>468               | 5.04.B.2         54-2500         Ammonia Stripper           SA2.5.04.B.3         LTP - Test & Commission   | 315 01-Oct-19<br>301 11-Aug-20  | 10-Aug-20 21<br>07-Jun-21 0  | 1 41-3000: FS, 54-2200: FS  | 54-2600: FS, M 6. 6: FS<br>54-2600: FS, M 6. 8: FS -150, M 6. 9: FS<br>23-6600: FS -150, 23-6900: SS, 54-2700: FS, M11. 1: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 469                             | 5.04.B.3 54-2700 Wet testing   | 75 25-Sep-20  | 08-Dec-20 21   | 1         54-2600: FS, 12-1200: FS, 53-6900: FS, 31-2200: FS, 23-6800: FS           23-6800: FS         54-2700: FS, 53-2400: FS, 53-2500: FS, 53-2100: FS, 53-210: FS, 53-210 | 54-2800: FS, M11. 2: FS<br>32-1500: FS, M11. 3: FS, M11. 4: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 471                             | SA2.5.04.C Part X1 Area C  | 730 31-Dec-18   | 29-Dec-20<br>29-Jun-20<br>5  | 53-2200: FS, 63-1700: FS, 63-2600: FS, 53-5400: FS, 54-4000: FS   |   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 473 474                         | 5.04.C.1 54-2900 LFG Building (with Transformer Room)  | 335 17-Jan-19   | 17-Dec-19 0  | 23-1300: FS, 23-3500: FS, 11-1100: FS, 31-1000: FS         54-2900: FS, 41-1200: FS, 53-5800: FS, 53-5700: FS   | 53-5800: FS, 53-5900: FS, 54-3000: FS, 54-3100: FS, M 7. 6:<br>FS<br>53-4600: FS, M 7. 4: FS -30, M 7. 5: FS, M 7. 5: FF  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 475<br>476                      | SA2.5.04.C.2 LFG Treatment Plant   | 554 31-Dec-18   | 01-Mar-20 125<br>06-Jul-20 0<br>18. Jap.20 0   | )   | 32-1400: FS, 32-2100: FS, 53-4700: FS, 53-4800: FS, M 7. 4:<br>FS -30, M 7. 5: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 477<br>478                      |  |   |  | 23-3500: FS, 11-1100: FS<br>54-3200: FS, 12-1000: FF  | 54-3300: FS, 54-3400: FS, 54-3500: FS, 54-3600: FS,<br>54-3700: FS, 54-3800: FS, M 7. 1: SF 30, M 7. 2: FS -200, M<br>7. 3: FS<br>32-2000: FS, 53-4800: FS, 54-3900: FS, M 7. 4: FS -80, M 7.<br>5: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 479<br>480                      | 5.04.C.2 54-3500 Pre-treatment   | 60 19-Jan-20  | 18-Mar-20 110  | <ul> <li>23-5800: FS, 54-3200: FS</li> <li>41-3900: FS, 54-3200: FS</li> <li>41-3300: FS, 54-3200: FS</li> </ul>  | 54-3900: FS, M 7. 4: FS -8, M 7. 5: FS<br>54-3900: FS, M 7. 4: FS -30, M 7. 5: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 481<br>482<br>483               | 5.04.C.2       54-3700       LFG Engine (incl. on-grid protection, PLC control, turning)         5.04.C.2       54-3800       Cooling System   | 110 21-Feb-20<br>45 19-Jan-20   | 09-Jun-20 27<br>03-Mar-20 125  | 5       41-3300: FS, 54-3200: FS         7       41-3600: FS, 54-3200: FS         25       22-1500: FS, 54-3200: FS   | 54-3900: FS, M 7. 4: FS -60, M 7. 5: FS<br>54-3900: FS, M 7. 4: FS -60<br>54-3900: FS, M 7. 4: FS -25, M 7. 5: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 484<br>485                      | 5.04.C.3 54-3900 MEP Testing   | 65 07-Jul-20  |  | 54-3400: FS, 54-3500: FS, 54-3600: FS, 54-3700: FS, 54-3800: FS, 12-1200: FS, 53-6900: FS, 31-2200: FS, 54-3300: FS   | 23-7000: SS -150, 23-7300: SS, 54-4000: FS, M11. 1: FS -30, M11. 2: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 486                             | SA2.5.04.D Part X1 Area D  | 374 29-Jun-19   | 06-Jul-20 6  |   | 32-1500: FS, 54-2800: FS, 63-4800: FF, 63-4900: FS, 63-4600: FS, M11. 3: FS, M11. 4: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 488                             | 5.04.D 54-4100 General Area & Access Road  | 120 09-Mar-20   | 06-Jul-20 6  | 23-1300: FS, 53-5500: SS, 53-5600: FF, 53-6200: SS, 53-6300: FF, 12-1000: FF, 11-1100: FS         3       23-1300: FS, 23-5200: FS, 41-4500: FS, 11-1100: FS,   | 32-2100: FS, 53-4800: FS, 53-4900: FS, 53-5000: FS, 53-7000: FS, M 8. 5: FS<br>32-2100: FS, M 8. 4: FS, M 8. 6: FS -60, M 8. 7: FS, 12-1000:  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 490                             | 5.04.D 54-4300 Weighbridge   | 75 29-Aug-19  | 11-Nov-19 63   | 3       23-1300, FS, 23-3200, FS, 41-4300, FS, 11-1100, FS, 54-4300; SS 60         3       41-4200; FS, 23-1300; FS, 23-5200; FS, 11-1100; FS, 54-4400; SS 60         4       23-1300; FS, 23-5200; FS, 11-1100; FS, 54-2000; FS  | 32-2100: FS, M 8. 4. FS, M 8. 6. FS -60, M 8. 7. FS, 12-1000.         FS, 54-4500: SS 60         32-2100: FS, M 8. 6: FS -40, M 8. 7: FS, 54-4200: SS 60         32-2100: FS, M 8. 1: FS, 12-1000: FS, 54-4300: SS 60   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         | · · · · · · · · · · · · · · · · · · · |
| 492                             | 5.04.D     54-4500     Wheel Wash Bath   | 75 27-Dec-19  | 10-Mar-20 63   | 3 23-1300: FS, 23-5200: FS, 41-4500: FS, 11-1100: FS, 54-4200: SS 60  | 32-2100: FS, M 8. 1: FS, 12-1000: FS, 54-4300: SS 60<br>32-2100: FS, M 8. 3: FS, 12-1000: FS, 54-4700: SS 30  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 493<br>494                      | 5.04.E 54-4600 General Area & Access Road  | 120 09-Mar-20   |  | 53-5500: SS, 53-5600: FF, 53-6200: SS, 53-6300: FF, 12-1000: FF, 11-1100: FS, 11-1200: FS   | 32-2100: FS, 53-4900: FS, 53-5000: FS, 53-7000: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 495<br>496<br>497               | SA2.5.08 Landscape Works - Advance Screen Planting in CWB Country Park SA2.5.08.N Area N   | 270 01-Apr-19<br>270 01-Apr-19  | 26-Dec-19 529<br>26-Dec-19 529   | 9   | 32-2100: FS, M 8. 2: FS, 12-1000: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 498<br>499                      | 5.08.N       58-1000       Advance Screen Planting         5.08.N       58-1100       Establishment of Screen Planting   | 90 01-Apr-19<br>270 01-Apr-19   | 29-Jun-19 529<br>26-Dec-19 529   | 29       23-7900: FS, 31-1100: FS, 11-1500: FS         19       58-1000: SS, 14-1800: FS  | 14-1800: SS -60, 58-1100: SS, 68-1600: SS 30, M 3. 2: FS<br>32-1500: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 500<br>501<br>502<br>503        | 5.08.S58-1200Advance Screen Planting5.08.S58-1300Establishment of Screen Planting  | 90 01-Apr-19<br>270 01-Apr-19   | 26-Dec-19         529           29-Jun-19         529           26-Dec-19         529           13-Apr-23         30 | 29       23-7900: FS, 31-1100: FS, 11-1500: FS         29       58-1200: SS   | 58-1300: SS, M 3. 2: FS<br>32-1500: FS  |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 503<br>504<br>505<br>506        | SA2.6.02 Advance Works SA2.6.02.9 Demolition of SENT Infrastructure Area   | 80 09-Jul-2<br>80 09-Jul-2  | 26-Sep-21 339<br>26-Sep-21 339   | 9   | 23-2000: SS -90, 63-2800: FS, 63-2900: FS, 63-3000: FS,   |    |                             |             |            |       |             |             |                                  |              | <b>-</b> |  |                         |         |                                       |
| 507                             | 6.02.9 62-1100 Existing SENT LTP   | 60 29-Jul-2   | 26-Sep-21 339  | 9 32-1500: FS, 12-1300: FS, 23-2200: FS   | 63-4300: FS, M12. 4: FS -30, M12. 5: FS<br>63-3000: FS, 63-4500: FS, M12. 4: FS -30, M12. 5: FS   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |
| 508                             |  | 60 29-Jul-2   | 26-Sep-21 339  | 9 32-1500: FS, 12-1300: FS, 23-2200: FS   | 63-3000: FS, 63-4500: FS, M12. 4: FS -30, M12. 5: FS  |    |                             |             | CENITY'    |       |             |             |                                  | Date         |          | Revision   | <u>           </u><br>т | Checked | Approved                              |
|                                 | <ul> <li>Remaining Work</li> <li>Critical Remaining Work</li> <li>Milestone</li> </ul>   | B of 4  |  |   | South-East New Te   |    | and Fill Exter<br>Programme | usion (SA2- | JENIX)     |       |             | 큧           | GREEN VALLEY<br>LANDFILL, LIMITE | 11-May-18    |          | W-PB-ZZ-0001 Rev. 101<br>W-PB-ZZ-0001 Rev. 102 (De | tailed)                 |         |                                       |
|                                 |  |   |  |   |   |    |                             |             |            |       |             |             |                                  |              |          |  |                         |         |                                       |

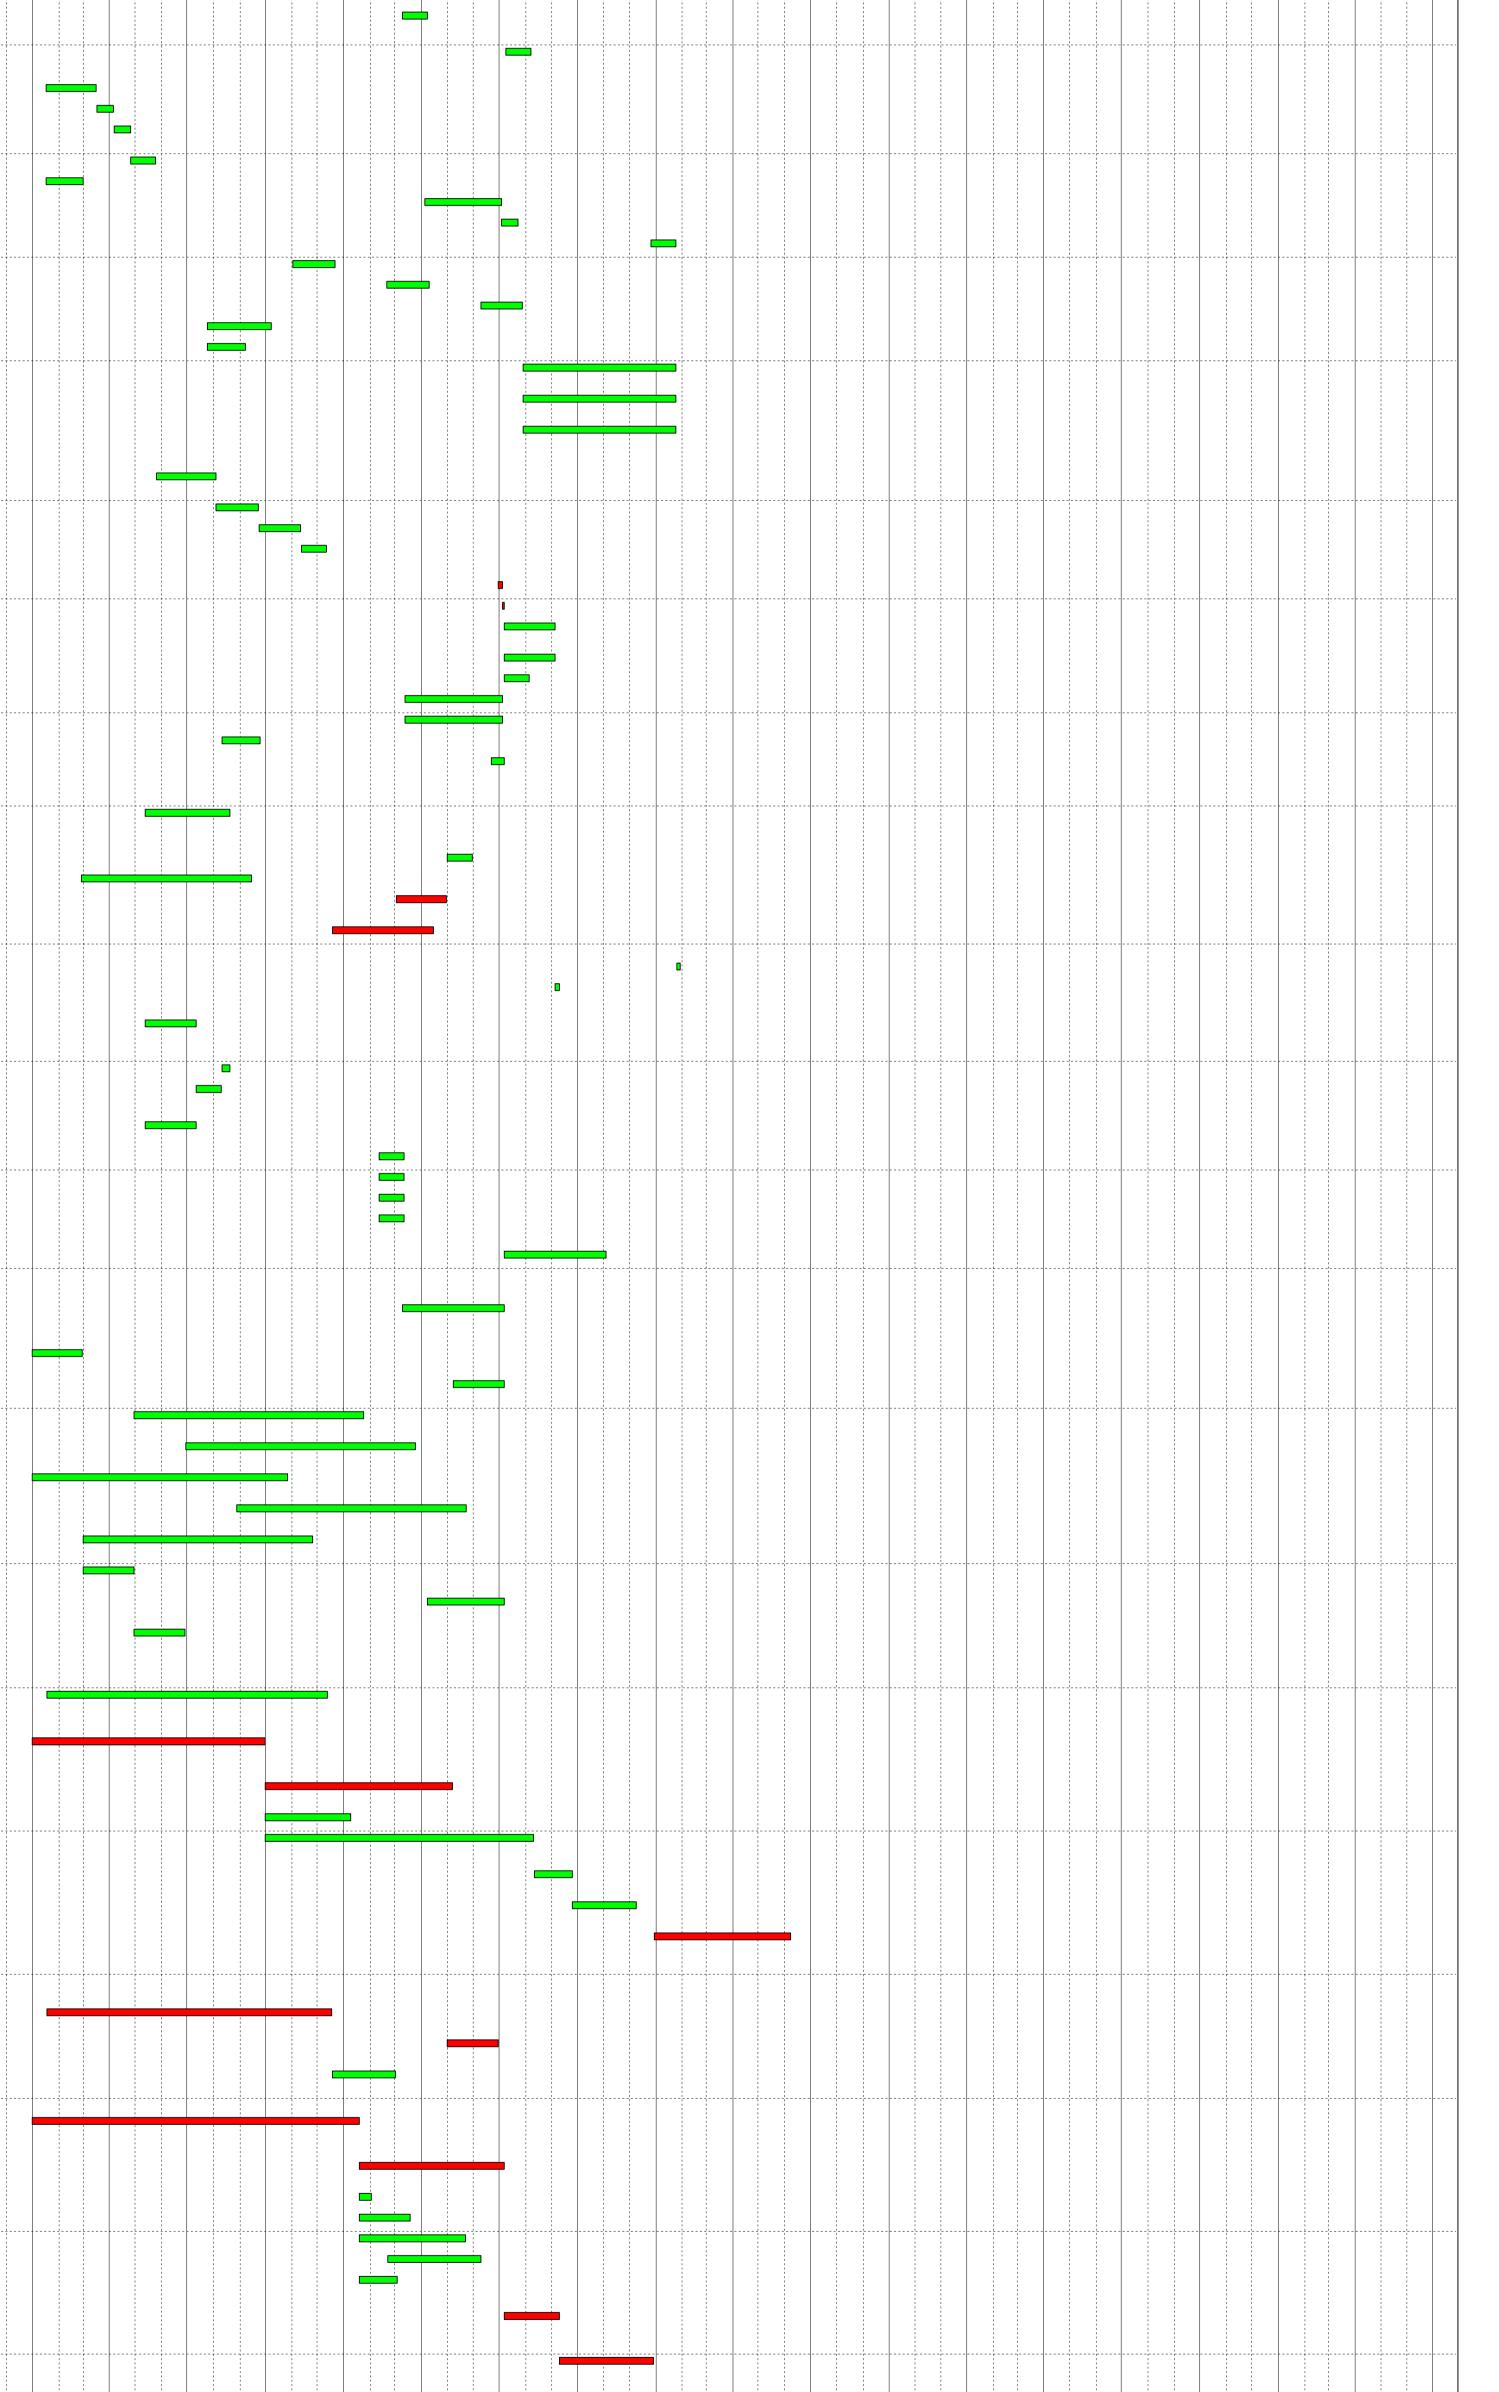

| # WE | S Path Activity Activity Name  | Dur | Start      | Finish                 | Total Predecessor Details  | Successor Details   | 1          | 2018 |    |      | 201 | 9  |      |      | 2020  |   | İ  | 2021 |    |    |    | 20 | 22 |    | 202 | 23    |
|------|--|-----|------------|------------------------|--|---|------------|------|----|------|-----|----|------|------|-------|---|----|------|----|----|----|----|----|----|-----|-------|
| 500  |  |     |            |                        | Float  |   | Q2         | Q3   | Q4 | 4 Q1 | Q2  | Q3 | Q4 Q | 1 Q2 | Q3    | Q4                                      | Q1 | Q2   | Q3 | Q4 | Q1 | Q2 | Q3 | Q4 | Q1  | Q2 Q3 |
| 509  | SA2.6.03 Civil Engineering Works SA2.6.03.2 Landfill Cell 2  |     |            | 13-Apr-23<br>23-Jan-21 |  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 511  | 6.03.2 63-1000 Earth bund (Eastern)  |     |            |                        | 9 11-1100: FS, 23-2500: FS, 53-4200: FS, 53-1400: FS, 53-2800: FS  | 53-3500: FS, 63-1500: FS, 63-1800: FS, 63-1900: FS, 63-2000: FS, 63-2100: FS, 63-2200: FS, M12. 1: FS -50, M12. 2: FS, 63-1100: FS              |            |      |    |      |     |    | -    |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 512  | 6.03.2 63-1100 Earth bund (Western)  | 110 | 20-Feb-20  | 08-Jun-20              | 84 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS, 63-1000: FS   | 63-1400: FS, 63-1500: FS, 63-1700: FS, 63-3500: FS, 63-3600: FS, 63-1200: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 513  | 6.03.2 63-1200 Intercell bund (Cell 2/3)   | 90  | 09-Jun-20  | 06-Sep-20              | 734 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS, 53-4400: FS, 63-1100: FS                             | 63-1500: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 514  | 6.03.2 63-1300 Site Formation  | 75  | 02-Nov-19  | 15-Jan-20              | 14 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS  | 63-1400: FS, 63-4200: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 515  | 6.03.2         63-1400         Pump Station (PS#2X)           6.03.2         63-1500         Lining Works                                    |     |            |                        | 84         63-1300: FS, 63-1100: FS           710         41-1500: FS, 63-1000: FS, 63-1100: FS, 63-1200: FS | 63-1600: FS, 63-1700: FS<br>63-1600: FS, M12. 3: FS, 63-2400: FS  |            |      |    |      |     |    |      |      | ····· |   |    |      |    |    |    |    |    |    |     |       |
| 517  | 6.03.2 63-1600 Protective Stone Laying & Leachate Collection Pipe  |     |            |                        | 810 63-1500: FS, 41-1500: FS, 63-1400: FS  | 32-1600: FS, M12. 3: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 518  | 6.03.2 63-1700 Install Leachate Force Main   |     |            |                        | 84 63-1100: FS, 41-1500: FS, 63-1400: FS   | 54-2800: FS, M12. 3: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 519  | 6.03.2 63-1800 Install Landfill Gas Pipe on earth bund   | 35  | 20-Feb-20  | 25-Mar-20              | 168 41-1500: FS, 63-1000: FS   | 54-4000: FS, M12. 3: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 520  | SA2.6.03.3 Landfill Cell 3   | 714 | 20-Feb-20  | 02-Feb-22              | 435  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 521  | 6.03.3 63-1900 Earth bund (Eastern)  | 110 | 20-Feb-20  | 08-Jun-20              | 9 11-1100: FS, 53-4200: FS, 63-1000: FS, 53-4300: FS, 53-2800: FS, 63-4200: FS                               | 53-3300: FS, 53-3600: FS, 63-2400: FS, 63-2700: FS, M12. 1:<br>FS -50, M12. 2: FS, 63-2000: FS -45, 63-2200: FS                                 |            |      |    |      |     |    |      |      | 2     |   |    |      |    |    |    |    |    |    |     |       |
| 522  | 6.03.3 63-2000 Earth bund (Western)  | 110 | 25-Apr-20  | 12-Aug-20              | 19 11-1100: FS, 63-1000: FS, 63-1900: FS -45   | 63-2300: FS, 63-2400: FS, 63-2600: FS, 63-3700: FS, 63-2100: FS -45   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 523  | 6.03.3 63-2100 Intercell bund (Cell 3/4)   |     |            |                        | 789 11-1100: FS, 63-1000: FS, 63-4200: FS, 63-2000: FS -45   | 63-2400: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 524  | 6.03.3 63-2200 Site Formation  |     |            | -                      | 9 11-1100: FS, 63-1000: FS, 63-1900: FS  | 63-2300: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 525  | 6.03.3         63-2300         Pump Station (PS#3X)           6.03.3         63-2400         Lining Works                                    |     |            |                        | 9 63-2200: FS, 63-2000: FS<br>435 41-1500: FS, 63-1900: FS, 63-2000: FS, 63-2100: FS,                        | 63-2500: FS, 63-2600: FS<br>63-2500: FS, M12. 3: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 520  |  | 100 | 51-00-21°  | uu-jan-22              | 435 41-1500: FS, 63-1900: FS, 63-2000: FS, 63-2100: FS,<br>63-1500: FS                                       |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 527  | 6.03.3 63-2500 Protective Stone Laying & Leachate Collection Pipe  |     |            |                        | 435 63-2400: FS, 41-1500: FS, 63-2300: FS  | 32-1700: FS, M12. 3: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 528  | 6.03.3 63-2600 Install Leachate Force Main   |     |            |                        | 9 63-2000: FS, 41-1500: FS, 63-2300: FS  | 53-2500: SS -90, 54-2800: FS, M12. 3: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 529  | 6.03.3 63-2700 Install Landfill Gas Pipe on earth bund   |     |            |                        | 58 41-1500: FS, 63-1900: FS  | 54-4000: FS, M12. 3: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 530  | SA2.6.03.4       Landfill Cell 4         6.03.4       63-2800       Remaining Portion of Buttress Wall                                       |     |            | 13-Apr-23<br>04-Jan-22 | 30<br>494 62-1000: FS  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 532  | 6.03.4 63-2900 Earth bund (Western) incl. MSE Wall   |     |            |                        | 239 62-1000: FS  | 63-3000: FS, 63-3100: FS, 63-3200: FS, 63-3400: FS,<br>63-3800: FS, 63-3900: FS, 63-4100: SS -90, M 9. 6: FS -60,<br>M 9. 7: FS -30, M 9. 8: FS |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 533  | 6.03.4 63-3000 Site Formation  | 120 | 05-Jan-22  | 04-May-22              | 239 62-1000: FS, 62-1100: FS, 62-1200: FS, 63-2900: FS, 63-4100: FS  | 63-3100: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 534  | 6.03.4 63-3100 Pump Station (PS#4X)  | 45  | 05-May-22  | 18-Jun-22              | 239 63-3000: FS, 63-2900: FS   | 63-3300: FS, 63-3400: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 535  | 6.03.4 63-3200 Lining Works  | 135 | 01-Oct-22* | 12-Feb-23              | 0 41-1500: FS, 63-2900: FS   | 63-3300: FS, M12. 6: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 536  | 6.03.4 63-3300 Protective Stone Laying & Leachate Collection Pipe  | 60  | 13-Feb-23  | 13-Apr-23              | 0 41-1500: FS, 63-3200: FS, 63-3100: FS  | 12-1900: FS, 32-1800: FS, M12. 6: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 537  | 6.03.4 63-3400 Install Leachate Force Main & Remove Temporary Leachate Pipe  |     |            |                        | 269 41-1500: FS, 63-2900: FS, 63-3100: FS  | 12-1900: FS, 32-1800: FS, M12. 6: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 538  | SA2.6.03.5       Drainage - Surface Run-Off         6.03.5       63-3500         Perimeter Channel (X9A) at Cell 2 Western Bund              |     |            | 03-Feb-22              | 464<br>1054 63-1100: FS  | 12-1900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 540  | 6.03.5 63-3600 Perimeter Channel (X10A) at Cell 2 Western Bund   |     |            |                        | 1029 63-1100: FS   | 63-4000: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 541  | 6.03.5 63-3700 Perimeter Channel (X10A) at Cell 3 Western Bund   |     |            |                        | 964 63-2000: FS  | 63-4000: FS   |            |      |    |      |     |    |      |      |       | • | +  |      |    |    |    |    |    |    |     |       |
| 542  | 6.03.5 63-3800 Perimeter Channel (X10A) at Cell 4 Western Bund   | 20  | 05-Jan-22  | 24-Jan-22              | 464 63-2900: FS  | 63-4000: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 543  | 6.03.5 63-3900 Perimeter Channel (X10C) at Cell 4 Western Bund   | 15  | 05-Jan-22  | 19-Jan-22              | 469 63-2900: FS  | 63-4000: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 544  | 6.03.5 63-4000 Connection to Existing DP3  |     |            |                        | 464 63-3900: FS, 63-3600: FS, 63-3700: FS, 63-3800: FS   | 12-1900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 545  | 6.03.5 63-4100 Remove Cut-Off Channel C-7 at bottom of Buttress Wall   |     |            |                        | 419 63-2900: SS -90  | 63-3000: FS   |            |      |    |      |     |    |      |      |       |   | ·  |      |    |    |    |    |    |    |     |       |
| 546  | 6.03.5 63-4200 Temporary Channel (X7T) at SENT Infrastructure Area SA2.6.03.6 Drainage - Ground Water  |     |            | 14-Feb-20<br>30-Nov-21 | 14 63-1300: FS   | 63-1900: FS, 63-2100: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 548  | SA2.6.03.6       Drainage - Ground water         6.03.6       63-4300       Construct Temporary Channel (TC-1), from MH-1 to Existing UC-825 |     | •          |                        | 529 23-1900: FS, 11-1300: FS, 62-1000: FS  | 63-4400: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 549  | 6.03.6 63-4400 Divert GW at MH-1 to TC-1   | 5   | 27-Oct-21  | 31-Oct-21              | 529 63:4300: FS  | 63-4500: FS, M 9. 9: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 550  | 6.03.6 63-4500 Reconnection of GWCP across Cell 4  | 30  | 01-Nov-21  | 30-Nov-21              | 529 62-1100: FS, 62-1200: FS, 63-4400: FS  | 12-1900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 551  | SA2.6.03.8 Utilities - Works Associated with Utilities Undertakers   |     |            | 27-Jul-21              |  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 552  | SA2.6.03.8.U1         CLP           6.03.8.U1         63-4600         LFG Generator On-grid Testing  |     |            | 27-Jul-21<br>27-Jun-21 | 655 32-2500: FS, 12-1200: FS, 54-4000: FS  | 63-4700: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 554  | 6.03.8.U1 63-4700 LFG Generator On-grid Inspection & Verify  | 30  | 28-Jun-21  | 27-Jul-21              | 655 63-4600: FS  | 12-1900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 555  | SA2.6.03.8.U6 TownGas  |     |            | 08-Jan-21              |  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 556  | 6.03.8.U6 63-4800 Laying Gas Mains (from LFG to Town Gas PF)   |     |            |                        | 855 54-4000: FF  | 63-4900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 558  | 6.03.8.U6 63-4900 Gas Meter Relocation & Connection at LFG SA2.6.04 Building & E&M Works   |     |            | 08-Jan-21              | 855 63-4800: FS, 54-4000: FS   | 12-1900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 559  | SA2.6.04.C Part X1 Area C  |     |            | 22-Jul-21<br>22-Jul-21 |  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 560  | SA2.6.04.C.02         LFG Treatment Plant           6.04.C.02         64-1000         GHS600 Blower 601 C Relocation                         |     |            | 22-Jul-21              |  | 12-1900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 562  | 6.04.C.02 64-1000 GHS600 Blower 601 C Relocation<br>6.04.C.02 64-1100 Absorption Chiller (Optional)  |     |            |                        | 660         32-1500: FS           1231         54-2200: FS   | 12-1900: FS<br>12-1900: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 563  | SA2.6.08 Landscape Works   |     |            | 03-Dec-19              |  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 564  | SA2.6.08.1 SENT Area - Tree Removal & Transplanting  | 240 | 01-Apr-19  | 26-Nov-19              | 1264   |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 565  | 6.08.1 68-1000 Access trees condition and select for transplanting   |     |            |                        | 1264 14-1300: FS   | 68-1100: FS, 68-1200: FS, 68-1400: FS   | - <b> </b> |      |    |      |     |    |      |      |       |   | ļļ |      |    |    |    |    |    |    |     |       |
| 566  | 6.08.1         68-1100         Prepare new site to receive trees           6.08.1         68-1200         Transplant selected trees          |     | -          |                        | 1264 68-1000: FS   | 68-1200: SS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 568  | 6.08.1     68-1200     Transplant selected trees       6.08.1     68-1300     Prune trees prior to removal from Cell 4                       |     | -          | -                      | 1264 68-1000: FS, 68-1100: SS<br>1264 68-1200: FS  | 68-1300: FS<br>12-1900: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 569  | 6.08.1     68-1400     Tree Felling - Part X3  |     | -          |                        | 1264 68-1200: FS<br>1384 23-8200: FS, 31-1600: FS, 68-1000: FS   | 12-1900: FS<br>12-1900: FS  |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 570  | SA2.6.08.2 SENTX Area - Trial Nursery & Tree Planting  |     | •          | 03-Dec-20              |  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 571  | 6.08.2 68-1600 Trial Nursery   | 300 | 01-May-19  | 24-Feb-20              | 1174 14-1800: FS, 58-1000: SS 30   | 12-1900: FS, M 3. 2: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
| 572  | 6.08.2 68-1700 Landscaping in New Infrastructure Area  | 150 | 07-Jul-20  | 03-Dec-20              | 891 54-1000: FS, 23-7600: FS   | 12-1900: FS   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |
|      |  |     |            |                        |  |   |            |      |    |      |     |    |      |      |       |   |    |      |    |    |    |    |    |    |     |       |

| Image: Work       South-East New Territories Land Fill Extension (SAZ-SENTX)         Image: A of 4       Page: 4 of 4         Baseline Programme       11-May-18       SENTX-GVL-W-PB-ZZ-0001 Rev. 101 | <b>—</b>                      |               |               | Date      | Revision                                   | Checked | Approved |
|--|-------------------------------|---------------|---------------|-----------|--|---------|----------|
| Daseine Programme Z2-Jul-18 SENTX-GVL-W-PB-ZZ-0001 Rev. 102 (Detailed)   | 3                             | Page · 4 of 4 | STREEN VALLEY | 11-May-18 | SENTX-GVL-W-PB-ZZ-0001 Rev. I01            |         |          |
|  | <ul> <li>Milestone</li> </ul> |               |               | 20-Jul-18 | SENTX-GVL-W-PB-ZZ-0001 Rev. I02 (Detailed) |         |          |

Annex B

## Environmental Mitigation Implementation Schedule

### Annex B Environmental Mitigation Implementation Schedule

| EIA Ref.  | Ref        | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address | Location of<br>the Measures                  | Who to<br>implement<br>the measure? | the m | neasu | nplement<br>re? <sup>(1)</sup><br>O/R A | What requirements<br>or standards for the<br>measure to achieve? | Implementation<br>Status and Remarks   |
|-----------|------------|---|---|--|-------------------------------------|-------|-------|---|--|--|
| Air Quali | ty – Const | truction Phase  |   |  |                                     |       |       |   |  |  |
| 4.8.1     | AQ1        | <ul><li>Blasting</li><li>The area within 30m of the blasting area will be wetted prior to blasting.</li></ul>   | To minimise potential dust nuisance                                       | Blasting area<br>and 30m of<br>blasting area | SENTX<br>Contractor                 |       | ✓     |   | Air Pollution Control<br>(Construction Dust)<br>Regulations      | Not applicable.<br>Blasting is not required<br>in the latest landfill<br>design      |
|           |            | • Blasting will not be carried out when<br>the strong wind signal or tropical<br>cyclone warning signal No. 3 or<br>higher is hoisted, unless this is with<br>the express prior permission of the<br>Commissioner of Mines. |   |  |                                     |       |       |   |  |  |
|           |            | • loose material and stones in the Site will be removed prior to the blast operation  |   |  |                                     |       |       |   |  |  |
|           |            | • During blasting, blast nets, screens<br>and other protective covers will be<br>used to prevent the projection of<br>flying fragments and material<br>resulting from blasting  |   |  |                                     |       |       |   |  |  |
| 4.8.1     | AQ2        | <ul> <li><u>Rock Drilling</u></li> <li>Watering will be carried out at the rock drilling activities to avoid fugitive dust emissions.</li> </ul>  | To minimise potential<br>dust nuisance                                    | Rock drilling<br>area                        | SENTX<br>Contractor                 |       | ~     |   | Air Pollution Control<br>(Construction Dust)<br>Regulations      | Not applicable. Rock<br>drilling is not required<br>in the latest landfill<br>design |

(1) D=Design; C=Construction; O/R=Operation/Restoration; A=Aftercare

| EIA Ref. | EM&A<br>Ref            | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended      | Location of the Measures | Who to<br>implement | the | meas         | implement<br>sure? <sup>(1)</sup> | What requirements or standards for the       | Implementation<br>Status and Remarks |
|----------|------------------------|---|---------------------------------------|--------------------------|---------------------|-----|--------------|-----------------------------------|--|--------------------------------------|
|          |                        |   | Measure & Main<br>Concerns to address |                          | the measure?        | D   | С            | O/R A                             | measure to achieve?                          |                                      |
| 4.8.1    | AQ3                    | Site Access Road  | To minimise potential                 |                          | SENTX               |     | ✓            |                                   | Air Pollution Control                        | Reminder was given to                |
|          |                        | • The main haul road will be kept clear of dusty materials or sprayed with  | dust nuisance                         | road                     | Contractor          |     |              |                                   | (Construction Dust)<br>Regulations           | Contractor                           |
|          |                        | <ul><li>water.</li><li>The main haul road will be paved</li></ul>   |                                       |                          |                     |     |              |                                   | HKAQO and EIAO-<br>TM Annex 4                |                                      |
|          |                        | The main haul road will be paved     with aggregate or gravel.  |                                       |                          |                     |     |              |                                   |  |                                      |
|          |                        | • Vehicle speed will be limited to 10kph.   |                                       |                          |                     |     |              |                                   |  |                                      |
| 4.8.1    | .8.1 AQ4 <u>Stockp</u> | Stockpiling of Dusty Materials  | dust nuisance                         |                          | SENTX               |     | ✓            |                                   | Air Pollution Control                        | Implemented                          |
|          |                        | • Any stockpile of dusty materials will be covered entirely by impervious   |                                       |                          | Contractor          |     |              |                                   | (Construction Dust)<br>Regulations           |                                      |
|          |                        | sheeting or placed in an area<br>sheltered on the top and three sides<br>or sprayed with water so as to ensure<br>that the entire surface is wet. |                                       |                          |                     |     |              |                                   | HKAQO and EIAO-<br>TM Annex 4                |                                      |
| 4.8.1    | AQ5                    | Loading, unloading or transfer of dusty<br>materials  | To minimise potential dust nuisance   | All construction         | SENTX<br>Contractor |     | ✓            |                                   | Air Pollution Control<br>(Construction Dust) | Not applicable                       |
|          |                        | • All dusty materials will be sprayed   |                                       | works area               |                     |     |              |                                   | Regulations                                  |                                      |
|          |                        | with water immediately prior to any<br>loading, unloading or transfer<br>operation so as to maintain the dusty<br>material wet.                   |                                       |                          |                     |     |              |                                   | HKAQO and EIAO-<br>TM Annex 4                |                                      |
| 4.8.1    | AQ6                    | Site Boundary and Entrance  | To minimise potential                 | Site boundary            |                     |     | $\checkmark$ |                                   | Air Pollution Control                        | Not applicable                       |
|          |                        | • Where a site boundary adjoins a road, street, service lane or other area  | dust nuisance                         | and entrance             | Contractor          |     |              |                                   | (Construction Dust)<br>Regulations           |                                      |
|          |                        | accessible to the public, hoarding of height not less than 2.4m from  |                                       |                          |                     |     |              |                                   | HKAQO and EIAO-                              |                                      |

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended      | Location of the Measures   | Who to<br>implement | When<br>the m |   | mplement<br>re? <sup>(1)</sup> | or standards for the  | Implementation<br>Status and Remarks |
|----------|-------------|--|---------------------------------------|----------------------------|---------------------|---------------|---|--------------------------------|---|--------------------------------------|
|          |             |  | Measure & Main<br>Concerns to address |                            | the measure?        | D             | С | O/R A                          | measure to achieve?   |                                      |
|          |             | ground level will be provided along<br>the entire length of that portion of the<br>site boundary except for the site<br>entrance or exit.  |                                       |                            |                     |               |   |                                | TM Annex 4  |                                      |
| 4.8.1    | AQ7         | Excavation Works   | To minimise potential                 |                            | SENTX               | ,             | ✓ |                                | Air Pollution Control   | Reminder was given to                |
|          |             | • Working area of any excavation or earth moving operation will be   |                                       | construction<br>works area | Contractor          |               |   |                                | (Construction Dust)<br>Regulations                                  | Contractor                           |
|          |             | sprayed with water immediately<br>before, during and immediately after<br>the operation so as to ensure that the<br>entire surface is wet.   |                                       |                            |                     |               |   |                                | HKAQO and EIAO-<br>TM Annex 4                                       |                                      |
| 4.8.1    | AQ8         | Building Demolition  | To minimise potential                 |                            | SENTX               | ,             | ✓ |                                | Air Pollution Control   | Not applicable                       |
|          |             | • The area where the demolition works<br>are planned to take place will be<br>sprayed with water immediately<br>prior to, during and immediately<br>after the demolition activities. | dust nuisance                         | construction<br>works area | Contractor          |               |   |                                | (Construction Dust)<br>Regulations<br>HKAQO and EIAO-<br>TM Annex 4 |                                      |
|          |             | • Any dusty materials remaining after<br>a stockpile is removed will be wetted<br>with water and cleared from the<br>surface of roads or street.                                     |                                       |                            |                     |               |   |                                |   |                                      |
| 4.8.1    | AQ9         | Construction of the Superstructure of<br>Building  | To minimise potential dust nuisance   | All construction           | SENTX               | ,             | √ |                                | Air Pollution Control<br>(Construction Dust)                        | Not applicable                       |
|          |             | Effective dust screens, sheeting or  | aust nuisance                         | works area                 | Contractor          |               |   |                                | Regulations   |                                      |
|          |             | netting will be provided to enclose<br>the scaffolding from the ground level<br>up to the highest level of the<br>scaffolding.   |                                       |                            |                     |               |   |                                | HKAQO and EIAO-<br>TM Annex 4                                       |                                      |

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended  | Location of the Measures  | Who to<br>implement |   |   | imple<br>sure? (1 |   | What requirements<br>or standards for the   | Implementation<br>Status and Remarks  |
|----------|-------------|--|---|---|---------------------|---|---|-------------------|---|---|---|
|          |             |  | Measure & Main<br>Concerns to address   |   | the measure?        | D | С | O/R               | А | measure to achieve?   |   |
| 4.8.1    | AQ10        | Should a stone crushing plant be needed<br>on site, the control measures<br>recommended in the <i>Best Practicable</i><br><i>Means Requirement for Mineral Works</i><br>( <i>Stone Crushing Plants</i> ) <i>BPM 11/1</i> should<br>be implemented. | To minimise potential dust nuisance   | Stone<br>crushing<br>plant/<br>construction<br>phase                | SENTX<br>Contractor |   | ✓ |                   |   | Best Practicable Means<br>Requirement for<br>Mineral Works (Stone<br>Crushing Plants) BPM<br>11/1 | Not applicable. Stone<br>crushing plant is not<br>required in the latest<br>landfill design |
| 4.8.1    | AQ11        | Good site practices such as regular<br>maintenance and checking of the diesel<br>powered mechanical equipment will be<br>adopted to avoid any black smoke<br>emissions and to minimize gaseous<br>emissions.                                       | To minimise potential<br>dust nuisance  | All<br>construction<br>works area                                   | SENTX<br>Contractor |   | • |                   |   | HKAQO and EIAO-<br>TM Annex 4   | Reminder was given to<br>Contractor   |
| 4.10.1   | AQ12        | Dust monitoring once every 6 days  | Ensure the dust<br>generated from the<br>project meets the air<br>quality requirement | At monitoring<br>locations<br>shown in<br><i>Figure 3.2a</i>        | SENTX<br>Contractor |   | ~ |                   |   | HKAQO and EIAO-<br>TM Annex 4   | Implemented   |
| 4.10.2   | AQ41        | Monitoring of ambient TSP once every 6 days  | Ensure the dust<br>emission from the<br>project meets the dust<br>requirement         | At monitoring<br>locations<br>shown in<br><i>Figure 11.3a</i>       | SENTX<br>Contractor |   | ~ | ✓                 |   | HKAQO and EIAO-<br>TM Annex 4   | Implemented   |
| 4.10.2   | AQ46        | Monitoring of meteorological station, continuously   | Collect site specific<br>meteorological data  | At<br>meteorologica<br>l station<br>shown in<br><i>Figure 11.3a</i> | SENTX<br>Contractor |   | ~ | ✓                 | ~ | -   | Implemented   |

Noise – Construction Phase

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended<br>Measure & Main | Location of the Measures | Who to<br>implement<br>the measure? | meas | implem<br>oure? <sup>(1)</sup><br>O/R |  | What requirements<br>or standards for the<br>measure to achieve? | Implementation<br>Status and Remarks |
|----------|-------------|---|--|--------------------------|-------------------------------------|------|---------------------------------------|--|--|--------------------------------------|
|          |             |   | Concerns to address                                |                          |                                     |      |                                       |  |  |                                      |
| 5.7.1    | N1          | Adopt good site practice listed below:  | To minimise potential construction noise           | All<br>construction      | SENTX<br>Contractor                 | ✓    |                                       |  | Noise Control<br>Ordinance (NCO) and                             | Implemented                          |
|          |             | <ul> <li>Only well-maintained plant will be<br/>operated on-site and plant should be<br/>serviced regularly during the<br/>construction program;</li> </ul>           | nuisance.  | works area               |                                     |      |                                       |  | EIAO-TM Annex 5  |                                      |
|          |             | • Silencers or mufflers on construction equipment should be utilized and will be properly maintained during the construction program;                                 | 111<br>Pe<br>1<br>7                                |                          |                                     |      |                                       |  |  |                                      |
|          |             | • Mobile plant, if any, will be sited as far from NSRs as possible;   |  |                          |                                     |      |                                       |  |  |                                      |
|          |             | • Machines and plant (such as trucks)<br>that may be in intermittent use will be<br>shut down between work periods or<br>should be throttled down to a<br>minimum;    |  |                          |                                     |      |                                       |  |  |                                      |
|          |             | • Plant known to emit noise strongly in<br>one direction will, wherever possible,<br>be orientated so that the noise is<br>directed away from the nearby NSRs;<br>and |  |                          |                                     |      |                                       |  |  |                                      |
|          |             | • Material stockpiles and other<br>structures will be effectively utilised,<br>wherever practicable, in screening<br>noise from on-site construction<br>activities.   |  |                          |                                     |      |                                       |  |  |                                      |

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended                                    | Location of the Measures                                     | Who to<br>implement | the | meas         | implemen<br>sure? <sup>(1)</sup> | or standards for the                                    | Implementation<br>Status and Remarks        |
|----------|-------------|--|---|--|---------------------|-----|--------------|----------------------------------|---|---|
|          |             |  | Measure & Main<br>Concerns to address                               |  | the measure?        | D   | С            | O/R A                            | measure to achieve?                                     |   |
| 5.8      | N2          | Weekly noise monitoring  | Ensure noise<br>generated from the<br>project meets the<br>criteria | At monitoring<br>locations<br>shown in<br><i>Figure 6.4a</i> | SENTX<br>Contractor |     | ~            |                                  | Noise Control<br>Ordinance (NCO) and<br>EIAO-TM Annex 5 | Implemented                                 |
| Water Qu | ality – Co  | nstruction Phase   |   |  |                     |     |              |                                  |   |   |
| 6.8.1    | WQ1         | Construction Runoff  |   |  |                     |     |              |                                  |   |   |
|          |             | • Exposed soil areas will be minimised   | To minimise potential   |  | SENTX               |     | $\checkmark$ |                                  | ProPECC PN 1/94   | Implemented                                 |
|          |             | to reduce the contamination of runoff and erosion.   | water quality impacts<br>arising from the<br>construction works     | construction<br>works area                                   | Contractor          |     |              |                                  | EIAO-TM Annex 6   |   |
| .8.1     | WQ2         | • Perimeter channels will be   | To minimise potential   |  | SENTX               | ✓   | $\checkmark$ |                                  | ProPECC PN 1/94   | Implemented                                 |
|          |             | constructed in advance of site<br>formation works and earthworks and<br>intercepting channels will be provided | water quality impacts<br>arising from the<br>construction works     | construction<br>works area                                   | Contractor          |     |              |                                  | Water Pollution<br>Control Ordinance<br>(WPCO)          |   |
|          |             | for example along the edge of excavation.  |   |  |                     |     |              |                                  | EIAO-TM Annex 6   |   |
| 5.8.1    | WQ3         | • Silt removal facilities, channels and  | To minimise potential   | All  | SENTX               |     | $\checkmark$ |                                  | ProPECC PN 1/94   | Deficiency of                               |
|          |             | manholes will be maintained and the deposited silt and grit should be  | water quality impacts arising from the                              | construction<br>works area                                   | Contractor          |     |              |                                  | WPCO  | mitigation measures<br>but rectified by the |
|          |             | removed regularly to ensure they are functioning properly at all times.  | construction works  | works area   |                     |     |              |                                  | EIAO-TM Annex 6   | Contractor                                  |
| 5.8.1    | WQ4         | • Temporary covers such as tarpaulin   | To minimise potential   |  | SENTX               |     | $\checkmark$ |                                  | ProPECC PN 1/94   | Implemented                                 |
|          |             | will also be provided to minimise the generation of high SS runoff.  | water quality impacts<br>arising from the<br>construction works     | construction<br>works area                                   | Contractor          |     |              |                                  | WPCO  |   |
| 6.8.1    | WQ5         | • The surface runoff contained any oil   | To minimise potential   | All  | SENTX               |     | ✓            |                                  | ProPECC PN 1/94   | Not applicable                              |

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address           | Location of<br>the Measures                | Who to<br>implement<br>the measure? | the m | ieast | <b>mplement</b><br><b>ure?</b> <sup>(1)</sup><br>O/R A | What requirements<br>or standards for the<br>measure to achieve? | Implementation<br>Status and Remarks                                 |
|----------|-------------|---|---|--|-------------------------------------|-------|-------|--|--|--|
|          |             | and grease will pass through the oil  | water quality impacts arising from the  | construction<br>works area                 | Contractor                          |       |       |  | WPCO   |  |
|          |             | interceptors.   | construction works  | works area                                 |                                     |       |       |  | EIAO-TM Annex 6  |  |
| 6.8.1    | WQ6         | • All sewer and drains will be sealed to  | To minimise potential   | Infrastructure<br>area at<br>existing SENT |                                     | ·     | ✓     |  | ProPECC PN 1/94  | Not applicable   |
|          |             | prevent building debris, soil etc from<br>entering public sewers/drains before  | water quality impacts arising from the  |  | Contractor                          |       |       |  | WPCO   |  |
|          |             | commencing any demolition works   |   | EIAO-TM Annex 6                            |                                     |       |       |  |  |  |
| 6.8.1    | WQ7         | • During the excavation works for the   | To minimise potential   | Tunnel boring                              | SENTX                               | ·     | ✓     |  | ProPECC PN 1/94  | Not applicable.<br>Excavation of drainage<br>tunnels is not required |
|          |             | twin drainage tunnels, the recycle water for cooling the cutter head of   | water quality impacts arising from the  | sites                                      | Contractor                          |       |       |  | WPCO   |  |
|          |             | the TBM will be conveyed to the<br>sedimentation tanks for treatment and<br>most of the treated water will be<br>reused, where applicable and as much<br>as possible, in the boring operations. | tunnel works  |  |                                     |       |       |  | EIAO-TM Annex 6  | in the latest landfill design.                                       |
| 6.8.1    | WQ8         | • The fuel and waste lubricant oil from   | To minimise potential   | SENTX Site                                 | SENTX                               | •     | ✓     |  | ProPECC PN 1/94  | Not applicable   |
|          |             | the on-site maintenance of machinery<br>and equipment will be collected by a  | water quality impacts<br>arising from improper                                      |  | Contractor                          |       |       |  | WPCO   |  |
|          |             | licensed chemical waste collector.  | handling of fuel and<br>oil   |  |                                     |       |       |  | Waste Disposal<br>Ordinance (WDO)                                |  |
| 6.8.1    | WQ9         | Implementation of excavation  | To minimise   | All  | SENTX                               | Ň     | ✓     |  | ProPECC PN 1/94  | Not applicable   |
|          |             | schedules, lining and covering of excavated stockpiles  | contaminated<br>stormwater run-off  | construction<br>works                      | Contractor                          |       |       |  | WPCO   |  |
|          |             | excavated stockpiles  | from the SENTX Site   | WOIKS                                      |                                     |       |       |  | EIAO-TM Annex 6  |  |
| 6.13     | WQ10        | • Monitoring of surface water quality   | To minimise potential   | SENTX Site                                 | SENTX                               | `     | ✓     |  | WPCO   | Implemented  |
|          |             | will be conducted on a regular basis as stated in the EM&A Manual.  | water quality impacts<br>on surface water<br>arising from the<br>construction works |  | Contractor                          |       |       |  | Water-TM   |  |

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address  | Location of<br>the Measures                 | Who to<br>implement<br>the measure? |   |   | o imple<br>isure? <sup>(1</sup><br>O/F | .)  | What requirements<br>or standards for the<br>measure to achieve?                 | Implementation<br>Status and Remarks |
|----------|-------------|---|--|---|-------------------------------------|---|---|--|---|--|--------------------------------------|
| 6.8.2    | WQ11        | Sewage Effluents  |  |   |                                     |   |   |  |   |  |                                      |
|          |             | • Sufficient chemical toilets will be provided for the construction workforce.  | To minimise potential<br>water quality impacts<br>arising from the<br>sewage effluents                                     | SENTX Site                                  | SENTX<br>Contractor                 |   | ~ |  |   | WPCO   | Implemented                          |
| 6.8.2    | WQ12        | • Untreated sewage will not be allowed  | To minimise potential  | SENTX Site                                  | SENTX                               |   | ✓ |  |   | WPCO   | Implemented                          |
|          |             | to discharge into the surrounding water body.   | water quality impacts<br>arising from the<br>sewage effluents  |   | Contractor                          |   |   |  |   | WDO  |                                      |
| 6.8.2    | WQ13        |   | To minimise potential  | SENTX Site                                  | SENTX                               |   | ✓ |  |   | WPCO   | Implemented                          |
|          |             | employed to clean the chemical toilets on a regular basis.  | water quality impacts<br>arising from the<br>sewage effluents  |   | Contractor                          |   |   |  |   | WDO  |                                      |
| Waste Ma | nagement    | - Construction Phase  |  |   |                                     |   |   |  |   |  |                                      |
| 7.6.1    | WM1         | All the necessary waste disposal permits<br>are obtained prior to the commencement<br>of construction work.   | To ensure compliance<br>with relevant<br>statutory<br>requirements   | Before<br>construction<br>works<br>commence | SENTX<br>Contractor                 | ✓ | ~ |  |   | WDO  | Implemented                          |
| 7.6.1    | WM2         | Management of Waste Disposal  |  |   |                                     |   |   |  |   |  |                                      |
|          |             | The construction contractor will open a   | To ensure that   | SENTX Site                                  | SENTX                               |   | ✓ |  |   | WDO  | Implemented                          |
|          |             | billing account with the EPD. Every<br>construction waste or public fill load to<br>be transferred to the Government waste<br>disposal facilities such as public fill | adverse<br>environmental<br>impacts are prevented  |   | Contractor                          |   |   |  |   | Waste Disposal<br>(Charges for Disposal<br>of Construction Waste)<br>Regulation; |                                      |
|          |             | landfills will required a valid "chit"<br>which contains the information of the<br>account holder to facilitate waste   | eception facilities, sorting facilities,<br>andfills will required a valid "chit"<br>which contains the information of the |   |                                     |   |   |  | Works Bureau<br>Technical Circular<br>No.31/2004; and |  |                                      |

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended              | Location of the Measures | Who to<br>implement | the m | neasure |      | or standards for the  | Implementation<br>Status and Remarks |
|----------|-------------|---|---|--------------------------|---------------------|-------|---------|------|---|--------------------------------------|
|          |             |   | Measure & Main<br>Concerns to address         |                          | the measure?        | D     | C O,    | 'R A | measure to achieve?   |                                      |
|          |             | transaction recording and billing to the<br>waste producer. A trip-ticket system<br>will also be established to monitor the<br>disposal of construction waste at the<br>SENT Landfill and to control fly-tipping.<br>The trip-ticket system will be included as<br>one of the contractual requirements and<br>implemented by the contractor.                        |   |                          |                     |       |         |      | Annex 5 and Annex 6<br>of Appendix G of<br>ETWBTC No.<br>19/2005)                   |                                      |
|          |             | A recording system for the amount of<br>waste generated, recycled and disposed<br>of (including the disposal sites) will be<br>established.   |   |                          |                     |       |         |      |   |                                      |
| 7.6.1    | WM3         | <u>Measures for the Reduction of</u><br><u>Construction Waste Generation</u>  |   |                          |                     |       |         |      |   |                                      |
|          |             | Inert and non-inert construction waste<br>will be segregated and stored in different<br>containers or skips to facilitate reuse or<br>recycling of the inert waste and proper<br>disposal of the non-inert construction<br>waste. Specific areas of the work site<br>will be designated for such segregation<br>and storage if immediate use is not<br>practicable. | To reduce<br>construction waste<br>generation | SENTX Site               | SENTX<br>Contractor |       | ✓       |      | WDO<br>EIAO-TM Annex 7  | Implemented                          |
| 7.6.1    | WM4         | Chemical Waste  |   |                          |                     |       |         |      |   |                                      |
|          |             | The construction contractor will register as a chemical waste producer with the   | To ensure proper<br>handling of chemical      | SENTX Site               | SENTX<br>Contractor |       | ✓       |      | WDO   | Implemented                          |
|          |             | EPD. Chemical waste producer with the<br>in accordance with the <i>Code of Practice on</i><br><i>the Packaging, Handling and Storage of</i>   | waste   |                          | Contractor          |       |         |      | Code of Practice on the<br>Packaging, Handling<br>and Storage of<br>Chemical Wastes |                                      |

| EIA Ref.                  | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address | Location of<br>the Measures | Who to<br>implement<br>the measure? | When to implement<br>the measure? <sup>(1)</sup><br>D C O/R A | or standards for the   | Implementation<br>Status and Remarks                                       |
|---------------------------|-------------|--|---|-----------------------------|-------------------------------------|---|------------------------|--|
|                           |             | Chemical Wastes.   |   |                             |                                     |   |                        |  |
| 7.6.1                     | WM5         | <u>Sewage</u>  |   |                             |                                     |   |                        |  |
|                           |             | An adequate number of portable toilets<br>will be provided at the site to ensure that<br>sewage from site staff is properly<br>collected. The portable toilets will be<br>desludged and maintained regularly by a<br>specialist contractor.  | To ensure proper<br>handling of sewage                                    | SENTX Site                  | SENTX<br>Contractor                 | ~   | WDO<br>EIAO-TM Annex 7 | Implemented  |
| 7.6.1 and                 | WM6         | General Refuse   |   |                             |                                     |   |                        |  |
| SENTX<br>latest<br>design |             | General refuse will be stored in enclosed<br>bins separately from construction and<br>chemical wastes. The general refuse<br>will be delivered to a transfer station or<br>other landfill, separately from<br>construction and chemical wastes, on a<br>daily basis to reduce odour, pest and<br>litter impacts. | To ensure proper<br>handling of general<br>refuse                         | SENTX Site                  | SENTX<br>Contractor                 | ~   | WDO<br>EIAO-TM Annex 7 | Deficiency of<br>mitigation measures<br>but rectified by the<br>Contractor |
|                           |             | Recycling bins will be provided at<br>strategic locations to facilitate recovery of<br>aluminium can and waste paper from the<br>SENTX Site. Materials recovered will<br>be sold for recycling.  |   |                             |                                     |   |                        |  |
| 7.6.1                     | WM7         | Staff Training<br>At the commencement of the<br>construction works, training will be<br>provided to workers on the concepts of<br>site cleanliness and on appropriate waste<br>management procedures, including  | To ensure that<br>adverse<br>environmental<br>impacts are prevented       | SENTX Site                  | SENTX<br>Contractor                 | ✓   |                        | Implemented  |

| EIA Ref.  | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address | Location of<br>the Measures                                   | Who to<br>implement<br>the measure? | When to implement<br>the measure? <sup>(1)</sup><br>D C O/R A | What requirements<br>or standards for the<br>measure to achieve?  | Implementation<br>Status and Remarks |
|---|-------------|---|---|---|-------------------------------------|---|---|--------------------------------------|
| 7.8   | WM8         | <ul> <li>waste reduction, reuse and recycling.</li> <li><u>Environmental Monitoring &amp; Audit</u><br/><u>Requirements</u></li> <li>Weekly audits of the waste management<br/>practices will be carried out during the<br/>construction phase. The audits examine<br/>all aspects of waste management<br/>including waste generation, storage,<br/>recycling, transport and disposal.</li> </ul>   | To ensure that<br>adverse<br>environmental<br>impacts are prevented       | SENTX Site  | SENTX<br>Contractor                 | ✓   | WDO   | Implemented                          |
| <i>Landfill</i> G<br>8.6.2 and<br>SENTX<br>latest<br>design | Gas Hazar   | ds – Design and Construction Phase<br>Precautionary measures to be adopted by<br>the contractors at the Project site and the<br>adjacent development site within the<br>landfill consultation zone are outlined in<br>Paragraphs 8.3 to 8.49 of EPD's Landfill<br>Gas Hazard Assessment Guidance Notes (the<br>Guidance Note). Those precautionary<br>measures applicable to the SENTX will<br>be confirmed in the detailed Qualitative<br>Landfill Gas Hazard Assessment to be<br>submitted by the contractor. | -   | All<br>construction<br>works area                             | SENTX<br>Contractor                 | ✓   | Paragraphs 8.3 to 8.49<br>of EPD's Landfill Gas<br>Hazards Assessment<br>Guidance Note<br>EIAO-TM Annex 7 | Implemented                          |
| 8.6.2   | LFG2        | Monitoring will be undertaken when<br>construction works are carried out in<br>confined space within the consultation<br>zone with reference to the monitoring<br>requirements and procedures specified<br>in Paragraphs 8.23 to 8.28 of EPD's<br><i>Guidance Note</i> will be followed.  | To protect workers<br>from landfill gas risk                              | Confined<br>space within<br>the<br>construction<br>works area | SENTX<br>Contractor                 | ~   |   | Not applicable                       |

| EIA Ref. | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended             | Location of the Measures | Who to<br>implement |   | meas | o imple<br>sure? (1) | ) | What requirements or standards for the                                       | Implementation<br>Status and Remarks |
|----------|-------------|--|--|--------------------------|---------------------|---|------|----------------------|---|--|--------------------------------------|
|          |             |  | Measure & Main<br>Concerns to address        |                          | the measure?        | D | С    | O/R                  | А | measure to achieve?  |                                      |
|          |             | In the event of the trigger levels being<br>exceeded, it is recommended that a<br>person, such as the Safety Officer, is<br>nominated, with deputies, to be<br>responsible for dealing with any<br>emergency which may occur due to<br>landfill gas. In an emergency situation,<br>the nominated person, or his deputies,<br>shall have the necessary authority and<br>shall ensure that the confined space is<br>evacuated and the necessary works<br>implemented for reducing the<br>concentrations of gas. The appropriate<br>organisations shall be contact. |  |                          |                     |   |      |                      |   |  |                                      |
| 8.6.3    | LFG4        | Implementation of engineering measures<br>according to Contract Specification<br>requirements. These measures will<br>include the placement of liner and<br>installation of landfill gas management<br>system to contain, manage and control<br>landfill gas.  | To protect workers<br>from landfill gas risk | SENTX Site               | SENTX<br>Contractor | ✓ | ✓    | *                    | ✓ | EIAO-TM Annex 7  | Not applicable                       |
| 8.6.3    | LFG5        | Engineering measures to significant<br>engineering measures will be required in<br>the design of the SENTX to protect the<br>staff working in the infrastructure area.<br>These measures include a combination of<br>passive and active systems (examples are<br>recommended in EPD's <i>Guidance Notes</i> ).<br>Landfill gas monitoring boreholes will be<br>installed at the edge of the waste slope  | To protect workers<br>from landfill gas risk | Infrastructure<br>Area   | SENTX<br>Contractor | ~ | ~    |                      |   | EPD's Landfill Gas<br>Hazards Assessment<br>Guidance Note<br>EIAO-TM Annex 7 | Not applicable                       |

| EIA Ref.  | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended           | Location of the Measures   | Who to<br>implement |   | impler<br>sure? <sup>(1)</sup> | nt What requirements<br>or standards for the   | Implementation<br>Status and Remarks                                       |
|-----------|-------------|--|--|----------------------------|---------------------|---|--------------------------------|--|--|
|           |             | Garron menoareb  | Measure & Main<br>Concerns to address      | ine meubureb               | the measure?        |   |                                | measure to achieve?                            |  |
|           |             | between the waste and the new<br>infrastructure area to monitor the<br>migration of landfill gas, if any.  |  |                            |                     |   |                                |  |  |
| Ecology – | Construct   | tion Phase   |  |                            |                     |   |                                |  |  |
| 9.10.2    | EC1         | Measures to control construction runoff:   | To minimise potential                      |                            | SENTX               | ✓ |                                | EIAO-TM Annex 16                               | Implemented  |
|           |             | • Exposed soil areas will be   | water quality impacts affecting ecological | construction<br>works area | Contractor          |   |                                | ProPECC PN 1/94                                |  |
|           |             | minimised to reduce the<br>contamination of runoff and<br>erosion;   | resources                                  |                            |                     |   |                                | Water Pollution<br>Control Ordinance<br>(WPCO) |  |
|           |             |  |  |                            |                     |   |                                | EIAO-TM Annex 6                                |  |
|           |             | • To prevent stormwater runoff from<br>washing across exposed soil<br>surfaces, perimeter channels will be<br>constructed in advance of site<br>formation works and earthworks<br>and intercepting channels will be<br>provided for example along the<br>edge of excavation; |  |                            |                     |   |                                | -  | Implemented  |
|           |             | • Silt removal facilities, channels and manholes will be maintained and the deposited silt and grit will be removed regularly to ensure they are functioning properly at all times;  |  |                            |                     |   |                                | -  | Deficiency of<br>mitigation measures<br>but rectified by the<br>Contractor |
|           |             | • Temporary covers such as tarpaulin will also be provided to minimise the generation of high suspended solids runoff;   |  |                            |                     |   |                                | -  | Implemented  |

| EIA Ref.                                | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address  | Location of<br>the Measures | Who to<br>implement<br>the measure? | When to im<br>the measure<br>D C C | -   | What requirements<br>or standards for the<br>measure to achieve? | Implementation<br>Status and Remarks |
|---|-------------|---|--|-----------------------------|-------------------------------------|------------------------------------|-----|--|--------------------------------------|
|   |             | • The surface runoff contained any oil and grease will pass through the oil interceptors; and,  |  |                             |                                     |                                    |     | -  | Not applicable                       |
|   |             | • Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site.                                  |  |                             |                                     |                                    |     | -  | Not applicable                       |
| 9.10.2 and<br>SENTX<br>latest<br>design | EC2         | <ul> <li>Good Construction Practice:</li> <li>Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas.</li> </ul> | To minimise potential<br>ecological impacts<br>arising from the<br>Project | SENTX Site                  | SENTX<br>Contractor                 | ~                                  |     | EIAO-TM Annex 16   | Implemented                          |
|   |             | • The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas.  |  |                             |                                     |                                    |     |  |                                      |
| 9.12.1                                  | EC9         | Environmental Monitoring & Audit<br>Requirements<br>The implementation of the ecological<br>mitigation measures should be checked<br>as part of the environmental monitoring<br>and audit procedures during the                         | To ensure that<br>adverse ecological<br>impacts are prevented              | SENTX                       | SENTX<br>Contractor                 | v v                                | / ✓ | EIAO-TM Annex 16   | Implemented                          |

| EIA Ref.  | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures   | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address | Location of<br>the Measures       | Who to<br>implement<br>the measure? |   |   | o implem<br>sure? <sup>(1)</sup><br>O/R | What requirements<br>or standards for the<br>measure to achieve? | Implementation<br>Status and Remarks |
|-----------|-------------|---|---|-----------------------------------|-------------------------------------|---|---|---|--|--------------------------------------|
|           |             | construction period.  |   |                                   |                                     |   |   |   |  |                                      |
| Landscape | e and Visu  | ual – Construction Phase  |   |                                   |                                     |   |   |   |  |                                      |
| 10.6.5    | LV1         | CM1 - The construction area and area<br>allowed for the contractor's office,<br>leachate treatment plant and laboratory<br>areas will be minimised to a practical<br>minimum, to avoid impacts on adjacent<br>landscape.  | To minimise the<br>landscape and visual<br>impacts                        | SENTX Site                        | SENTX<br>Contractor                 |   | ✓ |   | EIAO-TM Annex 18<br>and ETWBC 3/2006                             | Not applicable                       |
| 10.6.5    | LV2         | CM2 - Topsoil, where identified, will be<br>stripped and stored for re-use in the<br>construction of the soft landscape works,<br>where practical. The Contract<br>Specification will include storage and<br>reuse of topsoil as appropriate.   | To minimise the<br>landscape and visual<br>impacts                        | All<br>construction<br>works area | SENTX<br>Contractor                 |   | ✓ |   | EIAO-TM Annex 18   | Implemented                          |
| 10.6.5    | LV3         | CM3 - All existing trees at the edges of<br>the landfill will be carefully protected<br>during construction. Detailed Tree<br>Protection Specification will be provided<br>in the Contract Specification. Under<br>this Specification, the Contractor will be<br>required to submit, for approval, a<br>detailed working method statement for<br>the protection of trees prior to<br>undertaking any works adjacent to all<br>retained trees, including trees in<br>Contractor's works areas. | To minimise the<br>landscape and visual<br>impacts                        | Potential<br>impacted area        | SENTX<br>Contractor                 |   | ~ |   | EIAO-TM Annex 18<br>and ETWBC 3/2006                             | Implemented                          |
| 10.6.5    | LV4         | CM4 - Trees unavoidably affected by the<br>works will be transplanted, where<br>necessary and practical. A detailed Tree  | landscape and visual  | Potential impacted area           | SENTX<br>Contractor                 | ~ | ~ |   | EIAO-TM Annex 18<br>and ETWBC 3/2006                             | Not applicable                       |

| EIA Ref.                                | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended<br>Measure & Main<br>Concerns to address | Who to<br>implement<br>the measure?  |                     |   | o implement<br>sure? <sup>(1)</sup><br>O/R A | What requirements<br>or standards for the<br>measure to achieve? | Implementation<br>Status and Remarks |                |
|---|-------------|--|---|--------------------------------------|---------------------|---|--|--|--------------------------------------|----------------|
|   |             | Transplanting Specification will be<br>provided in the Contract Specification, if<br>applicable. Sufficient time for necessary<br>tree root and crown preparation periods<br>will be allowed in the project<br>programme.  |   |                                      |                     |   |  |  |                                      |                |
| 10.6.5 and<br>SENTX<br>latest<br>design | LV5         | CM5 - Within 3 months of taking<br>possession of the SENTX Site, the<br>Contractor will plant advance screen<br>planting of native species at Light<br>Standard size at 1.5m centres along the<br>High Junk Peak Trail so as to screen<br>views of the Works from the trail. Tree<br>planting locations will be agreed with<br>AFCD. Works will be completed within<br>9 months of taking possession of the<br>SENTX Site. | To minimise the<br>landscape and visual<br>impacts                        | At High Junk<br>Peak Hiking<br>Trail | SENTX<br>Contractor |   | •  |  | EIAO-TM Annex 18                     | Implemented    |
| 10.6.5                                  | LV6         | CM6 - The Contractor's office, leachate<br>treatment plant and laboratory will be<br>given an aesthetic treatment in earth<br>tones to reduce their visual impact and<br>albedo and blend them into the<br>surrounding landscape.  | To minimise the<br>landscape and visual<br>impacts                        | Infrastructure<br>area               | SENTX<br>Contractor | ~ | ~  |  | EIAO-TM Annex 18                     | Not applicable |
| 10.6.5                                  | LV7         | CM7 - The Contractor's office, leachate<br>treatment plant and laboratory will be<br>surrounded by a minimum of 5m wide<br>and 0.75m high earth bund on the west<br>and south sides planted with a dense<br>screen of tree and shrub vegetation.<br>Additional tree planting will be provided<br>in unused spaces with thin infrastructure   | To minimise the<br>landscape and visual<br>impacts                        | Infrastructure<br>area               | SENTX<br>Contractor | ~ | V  |  | EIAO-TM Annex 18<br>and ETWBC 7/2002 | Not applicable |

| EIA Ref.                                    | EM&A<br>Ref | Environmental Protection Measures/<br>Mitigation Measures  | Objectives of the<br>Recommended  | Location of the Measures | Who to<br>implement        |   |   | implement<br>sure? <sup>(1)</sup> | What requirements<br>or standards for the | Implementation<br>Status and Remarks |  |
|---|-------------|--|---|--------------------------|----------------------------|---|---|-----------------------------------|---|--------------------------------------|--|
|   |             |  | Measure & Main<br>Concerns to address   |                          | the measure?               | D | С | O/R A                             | measure to achieve?                       |                                      |  |
|   |             | site, along access roads and in and<br>around car parks. This will be<br>supplemented with shrub planting,<br>where appropriate.   |   |                          |                            |   |   |                                   |   |                                      |  |
| 10.6.5                                      | LV8         | CM8 - Planting trials will be carried out<br>in an on-site nursery prior to<br>implementation of the first phase of<br>restoration to establish the best planting<br>matrix and management intensity of the<br>recommended plant materials for the<br>restoration. | To minimise the<br>landscape and visual<br>impacts  | SENTX Site               | SENTX<br>Contractor        |   | ~ |                                   | EIAO-TM Annex 18                          | Not applicable                       |  |
| 11.4.1 and LV9<br>SENTX<br>latest<br>design |             | During the preparation of the detailed<br>landscape design plan, the design<br>submission will be audited against the<br>recommendation proposed in the <i>ER</i><br><i>Report</i> by the Registered Landscape<br>Architect from the ET.                           | To ensure the<br>implementation of<br>mitigation measures<br>proposed in this EIA<br>Report | SENTX Site               | SENTX<br>Contractor/E<br>T | ~ | • |                                   | EIAO-TM Annex 18                          | Implemented                          |  |

Annex C

Monitoring Schedule for This Reporting Period

### South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

| Sun             | Mon | Tue | Wed                      | Thu             | Fri                      | Sat             |
|-----------------|-----|-----|--------------------------|-----------------|--------------------------|-----------------|
|                 |     |     |                          |                 | 1                        | 2               |
|                 |     |     |                          |                 |                          |                 |
|                 |     |     |                          |                 |                          |                 |
|                 |     |     |                          |                 |                          |                 |
| 3               | 4   | 5   | 6                        | 7               | 8                        | 9               |
| Dust Monitoring |     |     |                          |                 | Surface Water Monitoring | Dust Monitoring |
|                 |     |     |                          |                 | Noise Monitoring         |                 |
|                 |     |     |                          |                 |                          |                 |
| 10              | 11  | 12  |                          | 14              |                          | 16              |
|                 |     |     | Surface Water Monitoring |                 | Dust Monitoring          |                 |
|                 |     |     | Noise Monitoring         |                 |                          |                 |
|                 |     |     |                          |                 |                          |                 |
| 17              | 18  | 19  |                          |                 | 22                       | 23              |
|                 |     |     | Surface Water Monitoring | Dust Monitoring |                          |                 |
|                 |     |     | Noise Monitoring         |                 |                          |                 |
|                 |     |     |                          |                 |                          |                 |
| 24              | 25  | 26  |                          | 28              |                          |                 |
|                 |     |     | Surface Water Monitoring |                 |                          |                 |
|                 |     |     | Noise Monitoring         |                 |                          |                 |
|                 |     |     | Dust Monitoring          |                 |                          |                 |

February 2019

Note:

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

Annex D

# Air Quality

Annex D1

Calibration Certificates for Dust Monitoring Equipment




8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

## Calibration Report

| High Volume Air Sampler |   |  |                 |         |                 |            |      |  |  |  |  |
|-------------------------|---|--|-----------------|---------|-----------------|------------|------|--|--|--|--|
| Manufacturer            | : | Graseby 105  | Date of Calibra | ation   | : <u>19 D</u> e | ecember 20 | 18   |  |  |  |  |
| Serial No.              | : | 9795 (ET / EA / 003 / 18) Calibration Due Date : 18 February 2019                                      |                 |         |                 |            |      |  |  |  |  |
| Method                  | : | Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Operations Manual |                 |         |                 |            |      |  |  |  |  |
| Results                 | : | Flow recorder reading (cfm)  | 46              | 40      | 36              | 31         | 28   |  |  |  |  |
|                         |   | Qstd (Actual flow rate, m <sup>3</sup> /min)   | 1.75            | 1.56    | 1.30            | 1.08       | 0.86 |  |  |  |  |
|                         |   | Pressure : 762.06 mm Hg  | g               | Temp. : | 293             | К          |      |  |  |  |  |

### Sampler 9795 Calibration Curve Site: Tseung Kwan O 137 (TKO-A1)

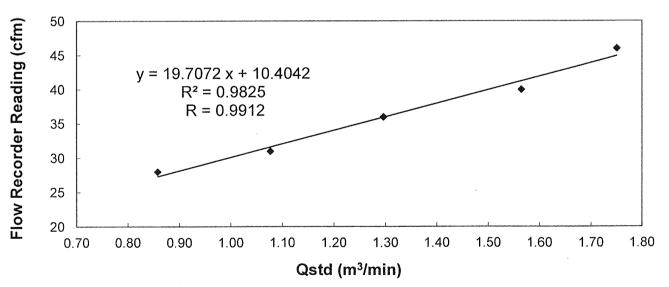

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / does not comply\* with the specified requirements and is deemed acceptable\*/ unacceptable\* for use.

| Calibrated by : |                        |
|-----------------|------------------------|
|                 | MAK, Kei Wai           |
|                 | (Assistant Supervisor) |

Checked by :

LĂU, Chi Leung (Environmental Team Leader)

- END OF REPORT -



8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong


T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

### <u>Calibration Report</u> of

High Volume Air Sampler

| Manufacturer | :  | Graseby 105                                  | Date of Calibra | ation   | ion : <u>15 February 2019</u> |       |      |      |  |
|--------------|--|--|-----------------|---------|-------------------------------|-------|------|------|--|
| Serial No.   | :  | 9795 (ET/EA/003/18)                          | Calibration Du  | e Date  | :                             | 14 Ap |      |      |  |
| Method       | Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the Operations Manual |  |                 |         |                               |       |      |      |  |
| Results      | :  | Flow recorder reading (cfm)                  | 48              | 42      |                               | 35    | 30   | 27   |  |
|              |  | Qstd (Actual flow rate, m <sup>3</sup> /min) | 1.76            | 1.58    |                               | 1.33  | 1.07 | 0.88 |  |
|              |  | Pressure : 768.81 mm H                       | Чg              | Temp. : |                               | 291   | K .  |      |  |

### Sampler 9795 Calibration Curve Site: Tseung Kwan O 137 (TKO-A1)

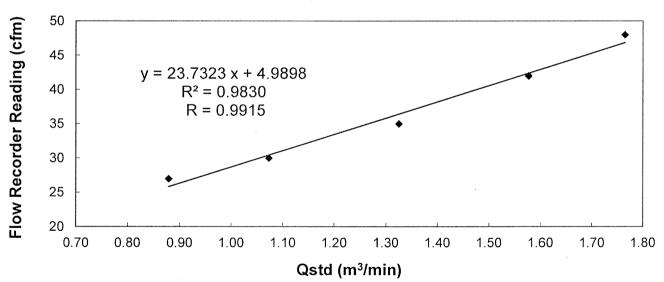

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / does not comply\* with the specified requirements and is deemed acceptable\*/ unacceptable\* for use.

Calibrated by :

LIAO, Yun Chao (Technician)

Checked by

LAU, Chi Leung (Environmental Team Leader)

- END OF REPORT -




8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

### **Calibration Report**

| of<br><u>High Volume Air Sampler</u> |  |                       |           |         |               |      |  |  |  |
|--------------------------------------|--|-----------------------|-----------|---------|---------------|------|--|--|--|
| Manufacturer                         | Andersen G1051 Date of Calibration : 19 December 2018                              |                       |           |         |               |      |  |  |  |
| Serial No.                           | : <u>1176 (ET / EA / 003 / 05 )</u> Calibration Due Date : <u>18 February 2019</u> |                       |           |         |               |      |  |  |  |
| Method                               | : Based on Operations Manual for the manufactured by Tisch TE-5025 A               | 5-point calibration u | sing stan | dard ca | libration kit |      |  |  |  |
| Results                              | : Flow recorder reading (cfm)  | 56                    | 51        | 44      | 35            | 28   |  |  |  |
|                                      | Qstd (Actual flow rate, m <sup>3</sup> /min)                                       | 1.81                  | 1.59      | 1.40    | 1.08          | 0.87 |  |  |  |
|                                      | Pressure : 762.06 mr   | n Hg Te               | mp. :     | 293     | К             |      |  |  |  |

Sampler 1176 Calibration Curve Site: Tseung Kwan O 137 (TKO-A2a)

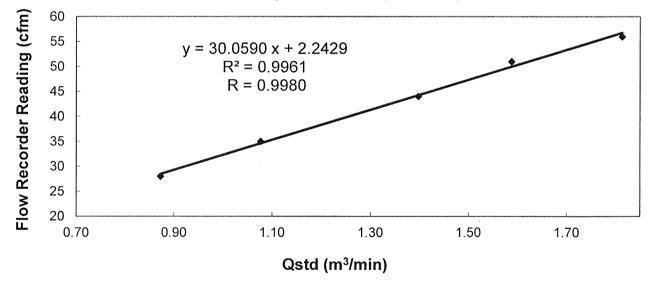

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / does not comply\* with the specified requirements and is deemed acceptable\* / unacceptable \* for use.

Calibrated by : MAK, Kei Wai (Assistant Supervisor)

Checked by LAU, Chi Leung (Environmental Team Leader)




T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

### **Calibration Report**

of High Volume Air Sampler

| Manufacturer | : | Andersen G1051  | Date of Calibration                         |         | : | 15 Fe | bruary 201 | 9    |
|--------------|---|---|---|---------|---|-------|------------|------|
| Serial No.   | : | 1176 (ET/EA/003/05)   | 6 (ET / EA / 003 / 05) Calibration Due Date |         |   | 14 Ap | oril 2019  |      |
| Method       | : | Based on Operations Manual for the 5-point calibration using standard calibration kit manufactured by Tisch TE-5025 A |   |         |   |       |            |      |
| Results      | : | Flow recorder reading (cfm)   | 54  | 48      |   | 45    | 33         | 25   |
|              |   | Qstd (Actual flow rate, m <sup>3</sup> /min)  | 1.82  | 1.58    |   | 1.43  | 1.07       | 0.86 |
|              |   | Pressure : 768.81 mm Hg   | g   | Temp. : |   | 291   | К          |      |

### Sampler 1176 Calibration Curve Site: Tseung Kwan O 137 (TKO-A2a)

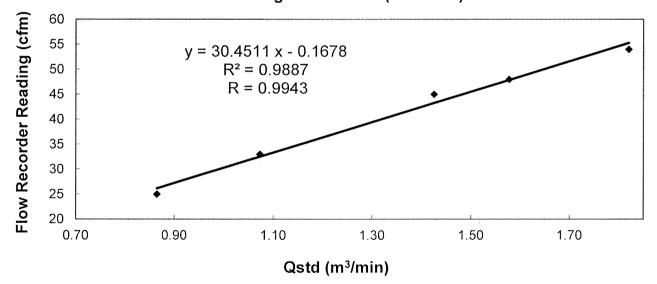

Acceptance Criteria : Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies\* / does not comply\* with the specified requirements and is deemed acceptable\* / unacceptable \* for use.

Calibrated by :

LIAO, Yun Chao (Technician)

Checked by LAU, Chi Leung

LAU, Chi Leung (Environmental Team Leader)

- END OF REPORT -

Annex D2


## 24-hour TSP Monitoring Results

| Start Date  | Start Time  | Finish Date    | Finish Time     | Weather      | 24-hour TSP (µg/m3)   |
|-------------|-------------|----------------|-----------------|--------------|-----------------------|
| 3 Feb 2019  | 8:00        | 4 Feb 2019     | 8:00            | Sunny        | 132                   |
| 9 Feb 2019  | 8:00        | 10 Feb 2019    | 8:00            | Sunny        | 134                   |
| 15 Feb 2019 | 13:00       | 16 Feb 2019    | 13:00           | Fine         | 83                    |
| 21 Feb 2019 | 8:00        | 22 Feb 2019    | 8:00            | Sunny        | 86                    |
| 27 Feb 2019 | 14:00       | 28 Feb 2019    | 14:00           | Fine         | 119                   |
|             |             |                |                 | Average      | 111                   |
|             |             |                |                 | Min          | 83                    |
|             |             |                |                 | Max          | 134                   |
| Note:       |             |                |                 |              |                       |
| DM1 corresp | onds to the | existing TSP 1 | nonitoring stat | ion TKO-A1 c | urrently operating by |

### Table D2.124-hour TSP Monitoring Results at DM1

CEDD.

### Figure D2.1 Graphical Presentation for 24-hr TSP Monitoring at DM1

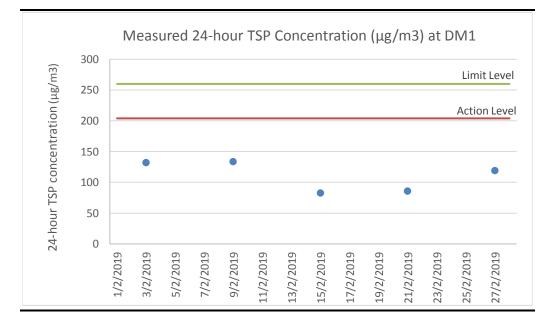


### Table D2.224-hour TSP Monitoring Results at DM2

| uny 160<br>uny 144<br>e 82<br>uny 92 |  |  |  |  |
|--------------------------------------|--|--|--|--|
| e 82                                 |  |  |  |  |
|                                      |  |  |  |  |
| uny 92                               |  |  |  |  |
|                                      |  |  |  |  |
| e 102                                |  |  |  |  |
| Average 116                          |  |  |  |  |
| <b>Min</b> 82                        |  |  |  |  |
| <b>Max</b> 160                       |  |  |  |  |
| Min 82                               |  |  |  |  |

DM2 corresponds to the existing TSP monitoring station TKO-A2a currently operating by CEDD.

### Figure D2.2 Graphical Presentation for 24-hr TSP Monitoring at DM2

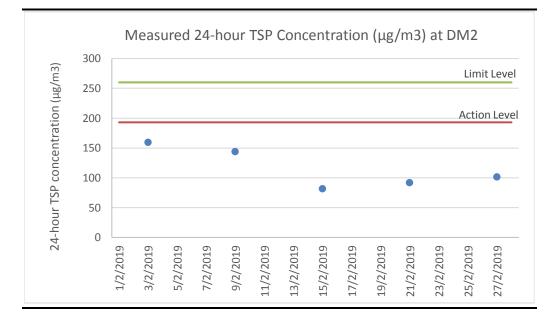

Annex D3

# Event and Action Plan for Dust Monitoring


|   |  | Action   |  |
|---|--|--|--|
| Event   | ET   | IEC  | Contractor   |
| Action Level  |  |  |  |
| Exceedance for<br>one sample                            | <ul> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below action level</li> </ul>  | <ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> </ul> | <ul> <li>Rectify any unacceptable practice</li> <li>Amend working methods if appropriate</li> </ul>  |
| Exceedance for<br>two or more<br>consecutive<br>samples | <ul> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>If exceedance continues, arrange meeting with Contractor &amp; IEC</li> <li>Continue monitoring at daily intervals if exceedance is due to the Project</li> <li>If no exceedance for 3 consecutive days, cease additional monitoring</li> </ul> | Check monitoring data submitted by ET  | <ul> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul> |

### Annex D3 Event and Action Plan for Dust Monitoring During Construction Phase


|   |   | Action   |   |
|---|---|--|---|
| Event   | ET  | IEC  | Contractor  |
| Limit Level   |   |  |   |
| Exceedance for<br>one sample                            | <ul> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below limit level</li> </ul>  | <ul><li>Check monitoring data submitted by ET</li><li>Check Contractor's working methods</li></ul> | <ul> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>                         |
| Exceedance for<br>two or more<br>consecutive<br>samples | <ul> <li>Identify source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD the causes &amp; actions taken for the exceedances</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Continue monitoring at daily intervals if exceedance is due to the Project</li> <li>If no exceedance for 3 consecutive days, cease additional monitoring</li> <li>If exceedance due to the Project continues, consider what portion of the work is responsible and stop that portion of work until the exceedance is abated</li> </ul> |  | <ul> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Resubmit proposals if problem still not under control</li> </ul> |

Annex D4


# Meteorological Data

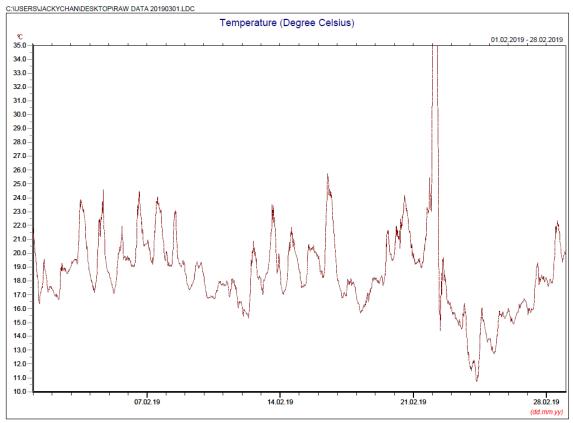


\* Note: Data on 22 February 2019 was discarded due to equipment failure.

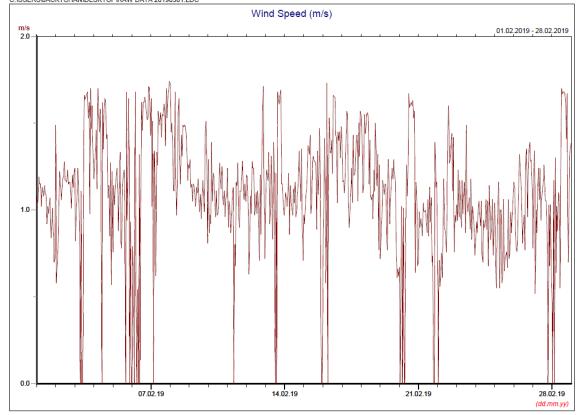


C:\USERS\JACKYCHAN\DESKTOP\RAW DATA 20190301.LDC

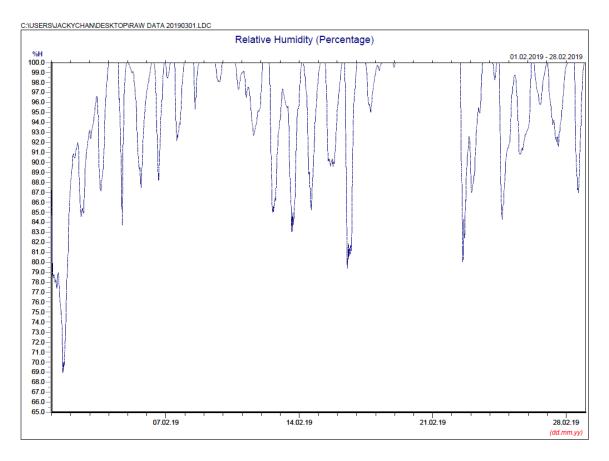

C:\USERS\JACKYCHAN\DESKTOP\RAW DATA 20190301.LDC

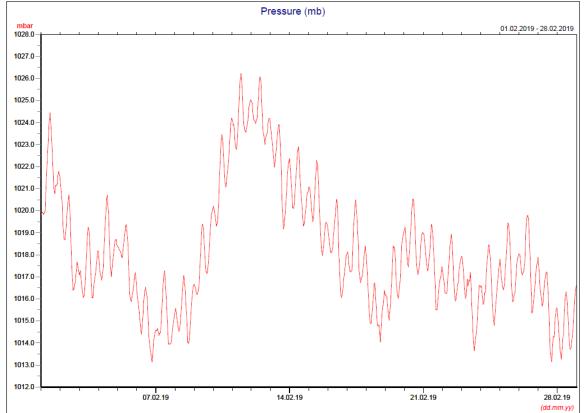

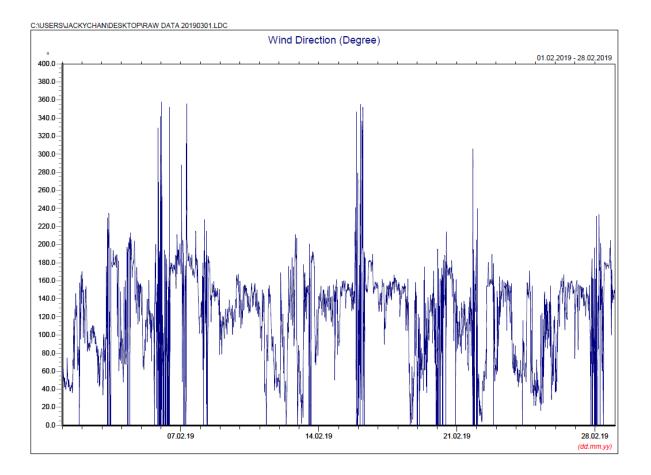

### Manual Rain Gauge Readings

February 2019

| Date           | Rainfall |
|----------------|----------|
|                | (mm)     |
| 1 Feb 19       | 0.0      |
| 2 Feb 19       | 0.0      |
| 3 Feb 19       | 0.0      |
| 4 Feb 19       | 0.0      |
| 5 Feb 19       | 0.0      |
| 6 Feb 19       | 0.0      |
| 7 Feb 19       | 0.0      |
| 8 Feb 19       | 0.4      |
| 9 Feb 19       | 1.4      |
| 10 Feb 19      | 0.2      |
| 11 Feb 19      | 0.6      |
| 12 Feb 19      | 0.0      |
| 13 Feb 19      | 0.0      |
| 14 Feb 19      | 0.3      |
| 15 Feb 19      | 0.1      |
| 16 Feb 19      | 0.0      |
| 17 Feb 19      | 0.0      |
| 18 Feb 19      | 21.4     |
| 19 Feb 19      | 42.8     |
| 20 Feb 19      | 0.2      |
| 21 Feb 19      | 0.2      |
| 22 Feb 19      | 0.0      |
| 23 Feb 19      | 16.0     |
| 24 Feb 19      | 0.2      |
| 25 Feb 19      | 0.3      |
| 26 Feb 19      | 0.4      |
| 27 Feb 19      | 0.0      |
| 28 Feb 19      | 0.0      |
| TOTAL RAINFALL | 84.5     |

Annex E

### Noise

Annex E1

Calibration Certificates for Noise Monitoring Equipment



Certificate No. : C183086 證書編號

| ITEM TESTED / 送檢項目   | (Job No. / 序引編號:IC18-0867)                   | Date of Receipt / 收件日期:29 May 2018 |
|----------------------|--|------------------------------------|
| Description / 儀器名稱 : | Integrating Sound Level Meter (EQ009)        |                                    |
| Manufacturer / 製造商 : | Brüel & Kjær                                 |                                    |
| Model No. / 型號 :     | 2238   |                                    |
| Serial No. / 編號 :    | 2285722                                      |                                    |
| Supplied By / 委託者 :  | Action-United Environmental Services and C   | Consulting                         |
|                      | Unit A, 20/F., Gold King Industrial Building | ,                                  |
|                      | 35-41 Tai Lin Pai Road, Kwai Chung, N.T.     |                                    |

### TEST CONDITIONS / 測試條件

Temperature / 溫度 : (23 ± 2)°C Line Voltage / 電壓 : --- Relative Humidity / 相對濕度 : (50±25)%

### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 10 June 2018

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only. The results do not exceed manufacturer's specification. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

| Tested By<br>測試    | : KCLee<br>Engineer                          |                       |   |              |
|--------------------|--|-----------------------|---|--------------|
| Certified By<br>核證 | : <u>Chan Man</u> CA<br>H C Chan<br>Engineer | Date of Issue<br>簽發日期 | : | 11 June 2018 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司一校正及檢測實驗所

c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com



Certificate No. : C183086 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- 2. Self-calibration using laboratory acoustic calibrator was performed before the test from 6.1.1.2 to 6.4.
- 3. The results presented are the mean of 3 measurements at each calibration point.
- 4. Test equipment :

| <u>Equipment ID</u> | Description                         | Certificate No. |
|---------------------|-------------------------------------|-----------------|
| CL280               | 40 MHz Arbitrary Waveform Generator | C180024         |
| CL281               | Multifunction Acoustic Calibrator   | PA160023        |

- 5. Test procedure : MA101N.
- 6. Results :
- 6.1 Sound Pressure Level
- 6.1.1 Reference Sound Pressure Level
- 6.1.1.1 Before Self-calibration

| UUT Setting     |                  |           |           | Applied     | Value | UUT     |
|-----------------|------------------|-----------|-----------|-------------|-------|---------|
| Range Parameter |                  | Frequency | Time      | Level Freq. |       | Reading |
| (dB)            |                  | Weighting | Weighting | (dB)        | (kHz) | (dB)    |
| 50 - 130        | L <sub>AFP</sub> | А         | F         | 94.00       | 1     | 94.1    |

### 6.1.1.2 After Self-calibration

| UUT Setting |           |           |           | Applied | d Value | UUT     | IEC 60651    |
|-------------|-----------|-----------|-----------|---------|---------|---------|--------------|
| Range       | Parameter | Frequency | Time      | Level   | Freq.   | Reading | Type 1 Spec. |
| (dB)        |           | Weighting | Weighting | (dB)    | (kHz)   | (dB)    | (dB)         |
| 50 - 130    | $L_{AFP}$ | А         | F         | 94.00   | 1       | 94.0    | $\pm 0.7$    |

#### 6.1.2 Linearity

|          | UUT Setting      |           |           |        | d Value | UUT         |
|----------|------------------|-----------|-----------|--------|---------|-------------|
| Range    | Parameter        | Frequency | Time      | Level  | Freq.   | Reading     |
| (dB)     |                  | Weighting | Weighting | (dB)   | (kHz)   | (dB)        |
| 50 - 130 | L <sub>AFP</sub> | А         | F         | 94.00  | 1       | 94.0 (Ref.) |
|          |                  |           |           | 104.00 |         | 104.0       |
|          |                  |           |           | 114.00 |         | 114.0       |

IEC 60651 Type 1 Spec. :  $\pm$  0.4 dB per 10 dB step and  $\pm$  0.7 dB for overall different.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory

c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 — 校正及檢測實驗所

c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986 E-mail/電郵: callab@suncreation.com

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



輝創工程有限公司 **Sun Creation Engineering Limited** 

**Calibration & Testing Laboratory** 

# Certificate of Calibration 校正證書

Certificate No. : C183086 證書編號

#### 6.2 Time Weighting

#### 6.2.1 Continuous Signal

| UUT Setting |                  |           |           | Applied Value |       | UUT     | IEC 60651    |  |  |  |
|-------------|------------------|-----------|-----------|---------------|-------|---------|--------------|--|--|--|
| Range       | Parameter        | Frequency | Time      | Level Freq.   |       | Reading | Type 1 Spec. |  |  |  |
| (dB)        |                  | Weighting | Weighting | (dB)          | (kHz) | (dB)    | (dB)         |  |  |  |
| 50 - 130    | L <sub>AFP</sub> | А         | F         | 94.00         | 1     | 94.0    | Ref.         |  |  |  |
|             | L <sub>ASP</sub> |           | S         |               |       | 94.1    | ± 0.1        |  |  |  |
|             | L <sub>AIP</sub> |           | Ι         |               |       | 94.1    | ± 0.1        |  |  |  |

#### 6.2.2 Tone Burst Signal (2 kHz)

|          | UUT                | Setting   |           | Applied Value |            | UUT     | IEC 60651      |
|----------|--------------------|-----------|-----------|---------------|------------|---------|----------------|
| Range    | Parameter          | Frequency | Time      | Level         | Burst      | Reading | Type 1 Spec.   |
| (dB)     |                    | Weighting | Weighting | (dB)          | Duration   | (dB)    | (dB)           |
| 30 - 110 | L <sub>AFP</sub>   | А         | F         | 106.0         | Continuous | 106.0   | Ref.           |
|          | L <sub>AFMax</sub> |           |           |               | 200 ms     | 104.9   | $-1.0 \pm 1.0$ |
|          | L <sub>ASP</sub>   |           | S         |               | Continuous | 106.0   | Ref.           |
|          | L <sub>ASMax</sub> |           |           |               | 500 ms     | 102.0   | $-4.1 \pm 1.0$ |

#### 6.3 Frequency Weighting

#### 6.3.1 A-Weighting

|          |                  | Setting   |           | Applied Value |          | UUT     | IEC 60651          |
|----------|------------------|-----------|-----------|---------------|----------|---------|--------------------|
| Range    | Parameter        | Frequency | Time      | Level         | Freq.    | Reading | Type 1 Spec.       |
| (dB)     |                  | Weighting | Weighting | (dB)          | -        | (dB)    | (dB)               |
| 50 - 130 | L <sub>AFP</sub> | А         | F         | 94.00         | 31.5 Hz  | 54.5    | $-39.4 \pm 1.5$    |
|          |                  |           |           |               | 63 Hz    | 67.8    | $-26.2 \pm 1.5$    |
|          |                  |           |           |               | 125 Hz   | 77.8    | $-16.1 \pm 1.0$    |
|          |                  |           |           |               | 250 Hz   | 85.3    | $-8.6 \pm 1.0$     |
|          |                  |           |           |               | 500 Hz   | 90.8    | $-3.2 \pm 1.0$     |
|          |                  |           |           |               | 1 kHz    | 94.0    | Ref.               |
|          |                  |           |           |               | 2 kHz    | 95.2    | $+1.2 \pm 1.0$     |
|          |                  |           |           |               | 4 kHz    | 95.0    | $+1.0 \pm 1.0$     |
|          |                  |           |           |               | 8 kHz    | 92.8    | -1.1 (+1.5 ; -3.0) |
|          |                  |           |           |               | 12.5 kHz | 89.7    | -4.3 (+3.0 ; -6.0) |

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 — 校正及檢測實驗所

c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986 E-mail/電郵: callab@suncreation.com

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory



Certificate No. : C183086 證書編號

### 6.3.2 <u>C-Weighting</u>

|          | UUT              | Setting   |           | Applie | ed Value | UUT     | IEC 60651          |
|----------|------------------|-----------|-----------|--------|----------|---------|--------------------|
| Range    | Parameter        | Frequency | Time      | Level  | Freq.    | Reading | Type 1 Spec.       |
| (dB)     |                  | Weighting | Weighting | (dB)   |          | (dB)    | (dB)               |
| 50 - 130 | L <sub>CFP</sub> | C         | F         | 94.00  | 31.5 Hz  | 90.9    | $-3.0 \pm 1.5$     |
|          |                  |           |           |        | 63 Hz    | 93.1    | $-0.8 \pm 1.5$     |
|          |                  |           |           |        | 125 Hz   | 93.8    | $-0.2 \pm 1.0$     |
|          |                  |           |           |        | 250 Hz   | 94.0    | $0.0 \pm 1.0$      |
|          |                  |           |           |        | 500 Hz   | 94.0    | $0.0 \pm 1.0$      |
|          |                  |           |           |        | 1 kHz    | 94.0    | Ref.               |
|          |                  |           |           |        | 2 kHz    | 93.8    | $-0.2 \pm 1.0$     |
|          |                  |           |           |        | 4 kHz    | 93.1    | $-0.8 \pm 1.0$     |
|          |                  |           |           |        | 8 kHz    | 90.9    | -3.0 (+1.5 ; -3.0) |
|          |                  |           | ×.        |        | 12.5 kHz | 87.7    | -6.2 (+3.0 ; -6.0) |

### 6.4 <u>Time Averaging</u>

|          | UUT Setting      |           |             | Applied Value |          |            |       |            | UUT     | IEC 60804 |
|----------|------------------|-----------|-------------|---------------|----------|------------|-------|------------|---------|-----------|
| Range    | Parameter        | Frequency | Integrating | Frequency     | Burst    | Burst      | Burst | Equivalent | Reading | Type 1    |
| (dB)     |                  | Weighting | Time        | (kHz)         | Duration | Duty       | Level | Level      | (dB)    | Spec.     |
|          |                  |           |             |               | (ms)     | Factor     | (dB)  | (dB)       |         | (dB)      |
| 30 - 110 | L <sub>Aeq</sub> | А         | 10 sec.     | 4             | 1        | 1/10       | 110.0 | 100        | 99.9    | ± 0.5     |
|          |                  |           |             |               |          | $1/10^{2}$ |       | 90         | 90.0    | ± 0.5     |
|          |                  |           | 60 sec.     |               |          | $1/10^{3}$ |       | 80         | 79.0    | ± 1.0     |
|          |                  |           | 5 min.      |               |          | 1/104      |       | 70         | 69.1    | ± 1.0     |

Remarks : - UUT Microphone Model No. : 4188 & S/N : 2658547

- Mfr's Spec. : IEC 60651 Type 1 & IEC 60804 Type 1

| - Uncertainties of Applied Value : | 250 Hz - 500 Hz<br>1 kHz<br>2 kHz - 4 kHz<br>8 kHz<br>12.5 kHz<br>104 dB : 1 kHz<br>114 dB : 1 kHz | : $\pm 0.30 \text{ dB}$<br>: $\pm 0.20 \text{ dB}$<br>: $\pm 0.35 \text{ dB}$<br>: $\pm 0.45 \text{ dB}$<br>: $\pm 0.70 \text{ dB}$<br>: $\pm 0.10 \text{ dB}$ (Ref. 94 dB)<br>: $\pm 0.10 \text{ dB}$ (Ref. 94 dB) |
|------------------------------------|--|---|
|                                    | 114 dB : 1 kHz   |   |
|                                    | Burst equivalent level   | $\pm 0.2 \text{ dB}$ (Ref. 110 dB continuous sound level)   |

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 — 校正及檢測實驗所 c/o 香港新界屯門興安里—號四樓 Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986 E-mail/電郵: callab@suncreation.com

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



Certificate No. : C182469 證書編號

| ITEM TESTED / 送檢項  | 目目 | (Job No. / 序引編號:IC18-0867)                   | Date of Receipt / 收件日期: 26 April 2018 |
|--------------------|----|--|---------------------------------------|
| Description / 儀器名稱 | :  | Sound Level Calibrator (EQ088)               |                                       |
| Manufacturer / 製造商 | :  | Quest  |                                       |
| Model No. / 型號     | :  | QC-20  |                                       |
| Serial No. / 編號    | :  | QO9090006                                    |                                       |
| Supplied By / 委託者  | :  | Action-United Environmental Services and     | Consulting                            |
|                    |    | Unit A, 20/F., Gold King Industrial Building | )<br>>                                |
|                    |    | 35-41 Tai Lin Pai Road, Kwai Chung, N.T.     |                                       |
|                    |    |  |                                       |

### TEST CONDITIONS / 測試條件

Temperature / 溫度 : (23 ± 2)°C Line Voltage / 電壓 : --- Relative Humidity / 相對濕度 : (50 ± 25)%

### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 12 May 2018

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only. The results do not exceed manufacturer's specification. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

| Tested By<br>測試    | :H T Wong<br>Technical Officer |                       |   |
|--------------------|--------------------------------|-----------------------|---|
| Certified By<br>核證 | K C Lee                        | Date of Issue<br>簽發日期 | : |

Engineer

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory

c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 — 校正及檢測實驗所

c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986

2) 2744 8986 E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

15 May 2018



Certificate No. : C182469 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- 2. The results presented are the mean of 3 measurements at each calibration point.
- 3. Test equipment :

| <u>Equipment ID</u> | <u>Description</u>                | <u>Certificate No.</u> |
|---------------------|-----------------------------------|------------------------|
| CL130               | Universal Counter                 | C173864                |
| CL281               | Multifunction Acoustic Calibrator | PA160023               |
| TST150A             | Measuring Amplifier               | C181288                |

- 4. Test procedure : MA100N.
- 5. Results :
- 5.1 Sound Level Accuracy

| UUT           | Measured Value | Mfr's Spec. | Uncertainty of Measured Value |
|---------------|----------------|-------------|-------------------------------|
| Nominal Value | (dB)           | (dB)        | (dB)                          |
| 94 dB, 1 kHz  | 94.2           | ± 0.3       | ± 0.2                         |
| 114 dB, 1 kHz | 114.2          |             |                               |

### 5.2 Frequency Accuracy

| UUT Nominal Value | Measured Value | Mfr's | Uncertainty of Measured Value |
|-------------------|----------------|-------|-------------------------------|
| (kHz)             | (kHz)          | Spec. | (Hz)                          |
| 1                 | 0.994          | ± 2 % | ± 1                           |

Remark : - The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



#### 综合試驗 有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533



### CERTIFICATE OF CALIBRATION

| Certificate No.:      | 18CA0827 01-02                             | Page: | 1 | of | 2 |
|-----------------------|--|-------|---|----|---|
| Item tested           |  |       |   |    |   |
| Description:          | Sound Calibrator (Class 1)                 |       |   |    |   |
| Manufacturer:         | 3M   |       |   |    |   |
| Type/Model No.:       | AC-300                                     |       |   |    |   |
| Serial/Equipment No.: | AC300006213 / EM377                        |       |   |    |   |
| Adaptors used:        |  |       |   |    |   |
| Item submitted by     |  |       |   |    |   |
| Curstomer:            | Green Valley Landfill, Limited (Hong Kong) |       |   |    |   |
| Address of Customer:  | -  |       |   |    |   |
| Request No.:          | -  |       |   |    |   |
| Date of receipt:      | 27-Aug-2018                                |       |   |    |   |
| Date of test:         | 28-Aug-2018                                |       |   |    |   |
| Reference equipmen    | t used in the calibration                  |       |   |    |   |

| Description:ModeLab standard microphoneB&K 4PreamplifierB&K 2Measuring amplifierB&K 2Signal generatorDS 36Digital multi-meter34401Audio analyzer89038Universal counter53132 | 4180         2412857           2673         2743150           2610         2346941           50         61227           A         US36087050           3         GB41300350 | Expiry Date:<br>20-Apr-2019<br>27-Apr-2019<br>08-May-2019<br>24-Apr-2019<br>23-Apr-2019<br>23-Apr-2019<br>24-Apr-2019 | Traceable to:<br>SCL<br>CEPREI<br>CEPREI<br>CEPREI<br>CEPREI<br>CEPREI<br>CEPREI |
|---|---|---|--|
|---|---|---|--|

### Ambient conditions

| Temperature:       | 21 ± 1 °C    |
|--------------------|--------------|
| Relative humidity: | 55 ± 10 %    |
| Air pressure:      | 1005 ± 5 hPa |

#### **Test specifications**

- 1, The Sound Calibrator has been calibrated in accordance with the requirements as specified in IEC 60942 1997 Annex B and the lab calibration procedure SMTP004-CA-156.
- 2. The calibrator was tested with its axis vertical facing downwards at the specific frequency using insert voltage technique.
- The results are rounded to the nearest 0.01 dB and 0.1 Hz and have not been corrected for variations from a reference pressure of 1013.25 hectoPascals as the maker's information indicates that the instrument is insensitive to pressure changes.

#### **Test results**

This is to certify that the sound calibrator conforms to the requirements of annex B of IEC 60942 1997 for the conditions under which the test was performed. This does not imply that the sound calibrator meets IEC 60942 under any other conditions.

Details of the performed measurements are presented on page 2 of this certificate.



Approved Signatory: <

Junai Fenc

Date: 28-Aug-2018

**Comments:** The results reported in this certificate refer to the conditon of the instrument on the date of calibration and carry no implication regarding the long<sub>7</sub>term stability of the instrument.

© Soils & Materials Engineering Co., Ltd

Form No CARP156-1/Issue 1/Rev D/01/03/2007

Company Chop:



#### 综合試驗有限公司 SOILS & MATERIALS ENGINEERING CO., LTD. 香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533



### **CERTIFICATE OF CALIBRATION**

(Continuation Page)

Certificate No.:

18CA0827 01-02

Page: 2 of

of 2

#### 1, Measured Sound Pressure Level

The output Sound Pressure Level in the calibrator head was measured at the setting and frequency shown using a calibrated laboratory standard microphone and insert voltage technique. The results are given in below with the estimated uncertainties.

| Frequency | Output Sound Pressure | Measured Output      | Estimated Expanded |
|-----------|-----------------------|----------------------|--------------------|
| Shown     | Level Setting         | Sound Pressure Level | Uncertainty        |
| Hz        | dB                    | dB                   | dB                 |
| 1000      | 114.00                | 114.10               | 0.10               |

#### 2, Sound Pressure Level Stability - Short Term Fluctuations

The Short Term Fluctuations was determined by measuring the maximum and minimum of the fast weighted DC output of the B&K 2610 measuring amplifier over a 20 second time interval as required in the standard. The Short Term Fluctuation was found to be:

| At 1000 Hz                     | STF = 0.020dB |
|--------------------------------|---------------|
| Estimated expanded uncertainty | 0.005 dB      |

#### 3, Actual Output Frequency

The determination of actual output frequency was made using a B&K 4180 microphone together with a B&K 2673 preamplifier connected to a B&K 2610 measuring amplifier. The AC output of the B&K 2610 was taken to an universal counter which was used to determine the frequency averaged over 20 second of operation as required by the standard. The actual output frequency at 1 KHz was:

| At 1000 Hz                     | Actual Frequency = 1000.0Hz |                         |
|--------------------------------|-----------------------------|-------------------------|
| Estimated expanded uncertainty | 0.1 Hz                      | Coverage factor k = 2.2 |
|                                |                             |                         |

#### 4, Total Noise and Distortion

For the Total Noise and Distortion measurement, the unfiltered AC output of the B&K 2610 measuring amplifier was connected to an Agilent Type 8903 B distortion analyser. The TND result at 1 KHz was:

| At 1000 Hz                     | TND = 0.1% |
|--------------------------------|------------|
| Estimated expanded uncertainty | 0.7 %      |

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement". and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

| /              |                  | - End -     | 1              |
|----------------|------------------|-------------|----------------|
| Calibrated by: | $\sim \sim \chi$ | Checked by: | Att            |
|                | Fung Chi Yip     |             | Shek Kwong Tat |
| Date:          | 28-Aug-2018      | Date:       | 28-Aug-2018    |

The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

© Soils & Materials Engineering Co Ltd

Form No CARP156-2/Issue 1/Rev C/01/05/2005


Hong Kong Accreditation Service (HKAS) has accredited this laboratory (Reg. No. HOKLAS 028) under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific calibration activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this certificate are traceable to the International System of Units (SI) or recognised measurement standards. This certificate shall not be reproduced except in full. Annex E2

Noise Monitoring Results

# Table E2.1Measured Noise Levels (dB(A)) at NM1 during Normal Working Hours (0700-<br/>1900 hours; Normal Weekdays)

| Date          | Start Time   | Finish Time   | Weather      | L <sub>10 (30min)</sub> | L <sub>90 (30min)</sub> | Leq (30min)   |
|---------------|--------------|---------------|--------------|-------------------------|-------------------------|---------------|
| 8 Feb 2019    | 14:17        | 14:47         | Sunny        | 50.0                    | 45.5                    | 48.0          |
| 13 Feb 2019   | 14:48        | 15:18         | Sunny        | 54.5                    | 46                      | 52.1          |
| 20 Feb 2019   | 14:48        | 15:18         | Sunny        | 53.5                    | 50                      | 52.5          |
| 28 Feb 2019   | 14:44        | 15:14         | Sunny        | 53.5                    | 47                      | 51.2          |
|               |              |               |              |                         | Average                 | e 51.0        |
|               |              |               |              |                         | Mir                     | <b>n</b> 48.0 |
|               |              |               |              |                         | Max                     | <b>x</b> 52.5 |
| Note:         |              |               |              |                         |                         |               |
| Correction of | +3 dB(A) was | made for free | field measur | ements.                 |                         |               |

### Figure E2.1 Graphical Presentation for Noise Monitoring at NM1

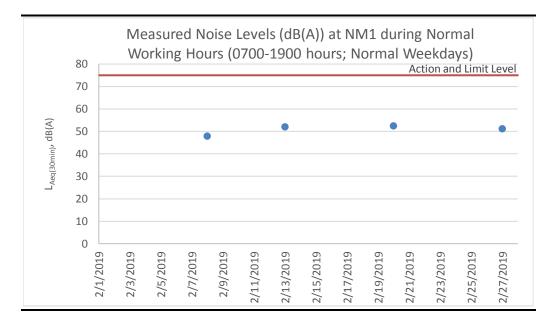

Annex E3

# Event and Action Plan for Noise Monitoring

| Event           | Action  |  |  |  |  |  |  |
|-----------------|---|--|--|--|--|--|--|
|                 | ET  | IEC  | Contractor   |  |  |  |  |
| Action<br>Level | and complaint   | <ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul> | <ul><li>Submit proposals for remedial measures to IEC</li><li>Implement the agreed proposals</li></ul>   |  |  |  |  |
| Limit<br>Level  | Identify the source(s) and investigate the cause(s) of exceedance<br>and complaint<br>Prepare Notification of Exceedance within 24 hours<br>Inform Contractor, IEC, Project Proponent and EPD whether the<br>cause of exceedance is due to the Project<br>Analyse the operation of SENTX and investigate the causes of<br>exceedance<br>Provide interim report to Contractor, IEC, Project Proponent and<br>EPD the causes of the exceedances<br>Discuss with Contractor and IEC for remedial measures required<br>Ensure remedial measures are properly implemented<br>Report the remedial measures implemented and the additional<br>monitoring results to Contactor, IEC, Project Proponent and EPD<br>Have additional monitoring if exceedance is due to the Project. If<br>exceedance stops, cease additional monitoring | <ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul> | <ul> <li>Take immediate measures to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC within 3 working days of notification</li> <li>Implement the agreed proposals</li> <li>Resubmit proposals if problem still not under control</li> <li>Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated</li> </ul> |  |  |  |  |

#### Annex E3 Event and Action Plan for Construction Noise

# Surface Water Quality

Calibration Certificates for Surface Water Quality Monitoring Equipment



ALS Technichem (HK) Pty Ltd 11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong T: +852 2610 1044 | F: +852 2610 2021

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

| CONTACT:<br>CLIENT: | MR BEN TAM<br>ACTION UNITED ENVIRONMENT SERVICES AND<br>CONSULTING | WORK ORDER:    | HK1860886   |
|---------------------|--|----------------|-------------|
| ADDRESS:            | RM A 20/F., GOLD KING IND BLDG,                                    | SUB-BATCH:     | 0           |
|                     | NO. 35-41 TAI LIN PAI ROAD,  | LABORATORY:    | HONG KONG   |
|                     | KWAI CHUNG,  | DATE RECEIVED: | 21-Nov-2018 |
|                     | N.T., HONG KONG.   | DATE OF ISSUE: | 27-Dec-2018 |

#### COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

| Scope of Test:       | Conductivity, Dissolved Oxygen, pH Value, Turbidity, Salinity and Temperature |
|----------------------|---|
| Equipment Type:      | Multifunctional Meter   |
| Brand Name:          | YSI   |
| Model No .:          | Professional DSS  |
| Serial No.:          | 15H102620/ 15H103928  |
| Equipment No.:       | EQW018  |
| Date of Calibration: | 28 November, 2018   |

#### <u>NOTES</u>

This is the Final Report and supersedes any preliminary report with this batch number.

Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Ma Ani

Mr Chan Siu Ming, Vico Manager - Inorganic

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

### REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

| WORK ORDER:   | HK1860886   |                           | ALS               |
|---|---|---------------------------|-------------------|
| SUB-BATCH:<br>DATE OF ISSUE:<br>CLIENT:   | 0<br>27-Dec-2018<br>ACTION UNITED ENVIRONMEN  | T SERVICES AND CONSULTING |                   |
| Equipment Type:<br>Brand Name:<br>Model No.:<br>Serial No.:<br>Equipment No.:<br>Date of Calibration: | Multifunctional Meter<br>YSI<br>Professional DSS<br>15H102620/ 15H103928<br>EQW018<br>28 November, 2018 | Date of Next Calibration: | 28 February, 2019 |

### PARAMETERS:

Conductivity

#### Method Ref: APHA (21st edition), 2510B

| Expected Reading (µS/cm) | Displayed Reading (µS/cm) | Tolerance (%) |  |  |
|--------------------------|---------------------------|---------------|--|--|
| 146.9                    | 159.8                     | +8.8          |  |  |
| 6667                     | 6492                      | -2.6          |  |  |
| 12890                    | 12526                     | -2.8          |  |  |
| 58670                    | 55801                     | -4.9          |  |  |
|                          | Tolerance Limit (%)       | ±10.0         |  |  |

#### Dissolved Oxygen Method Ref: APHA (21st edition), 4500-O: G

| Expected Reading (mg/L) | Displayed Reading (mg/L) | Tolerance (mg/L) |
|-------------------------|--------------------------|------------------|
| 3.17                    | 3.05                     | -0.12            |
| 5.95                    | 5.92                     | -0.03            |
| 8.19                    | 8.29                     | +0.10            |
|                         | Tolerance Limit (mg/L)   | ±0.20            |

#### pH Value

Method Ref: APHA (21st edition), 4500H:B

| Expected Reading (pH unit) | Displayed Reading (pH unit) | Tolerance (pH unit) |
|----------------------------|-----------------------------|---------------------|
| 4.0                        | 4.10                        | +0.10               |
| 7.0                        | 7.13                        | +0.13               |
| 10.0                       | 9.99                        | -0.01               |
|                            | Tolerance Limit (pH unit)   | ±0.20               |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ma Ai

Mr Chan Siu Ming, Vico Manager - Inorganic

## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

| WORK ORDER:  | HK1860886   |                                   | ALS               |
|--|---|-----------------------------------|-------------------|
| SUB-BATCH:<br>DATE OF ISSUE:<br>CLIENT:  | 0<br>27-Dec-2018<br>ACTION UNITED ENVIRONMEN  | T SERVICES AND CONSULTING         |                   |
| Equipment Type:<br>Brand Name:<br>Model No.:<br>Serial No.:<br>Equipment No.:<br>Date of Calibration:<br>PARAMETERS: | Multifunctional Meter<br>YSI<br>Professional DSS<br>15H102620/ 15H103928<br>EQW018<br>28 November, 2018 | Date of Next Calibration:         | 28 February, 2019 |
| Salinity   | Method Ref: APHA (21st edition)   | ), 2520B                          |                   |
| <i>y</i>   | Expected Reading (ppt)  | Displayed Reading (ppt)           | Tolerance (%)     |
|  | 0   | 0.01                              |                   |
|  | 10  | 10.23                             | +2.3              |
|  | 20  | 21.02                             | +5.1              |
|  | 30  | 29.83                             | -0.6              |
|  |   | Tolerance Limit (%)               | ±10.0             |
| Temperature  | Method Ref: Section 6 of Interna  | ational Accreditation New Zealand | Technical         |

Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

| Expected Reading (°C) | Displayed Reading (°C) | Tolerance (°C) |
|-----------------------|------------------------|----------------|
| 10.0                  | 11.2                   | +1.2           |
| 22.0                  | 21.7                   | -0.3           |
| 41.0                  | 40.8                   | -0.2           |
|                       | Tolerance Limit (°C)   | ±2.0           |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ma An

Mr Chan Siu Ming, Vico Manager - Inorganic

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

| WORK ORDER:   | HK1860886   |                           | ALS            |
|---|---|---------------------------|----------------|
| SUB-BATCH:<br>DATE OF ISSUE:<br>CLIENT:   | 0<br>27-Dec-2018<br>ACTION UNITED ENVIRONMENT   | SERVICES AND CONSULTING   |                |
| Equipment Type:<br>Brand Name:<br>Model No.:<br>Serial No.:<br>Equipment No.:<br>Date of Calibration: | Multifunctional Meter<br>YSI<br>Professional DSS<br>15H102620/ 15H103928<br>EQW018<br>05 December, 2018 | Date of Next Calibration: | 05 March, 2019 |
| PARAMETERS:   |   |                           |                |
| Turbidity   | Method Ref: APHA (21st edition),  | , 2130B                   |                |
|   | Expected Reading (NTU)  | Displayed Reading (NTU)   | Tolerance (%)  |
|   | 0   | O.14                      |                |
|   | 4   | 3.60                      | -10.0          |
|   | 40  | 41.49                     | + 3.7          |
|   | 80  | 74.42                     | -7.0           |
|   | 400   | 426.8                     | + 6.7          |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

803.89

Tolerance Limit (%)

800

Ma Ai

+0.5

 $\pm 10.0$ 

Mr Chan Siu Ming, Vico Manager - Inorganic

# Surface Water Quality Monitoring Results

| Date        | Time  | Weather Condition | Water Appearance  | Water Condition | Water<br>Temperature (°C) | Dissolved Oxygen<br>(DO) (mg/L) | рН   | Suspended<br>Solids (SS)<br>(mg/L) |
|-------------|-------|-------------------|---|-----------------|---------------------------|---------------------------------|------|------------------------------------|
| 8 Feb 2019  | 10:38 | Sunny             |   | Unable          | to collect water samp     | le due to insufficient f        | flow |                                    |
| 13 Feb 2019 | 14:32 | Sunny             | Unable to collect water sample due to insufficient flow |                 |                           |                                 |      |                                    |
| 20 Feb 2019 | 14:08 | Sunny             | Unable to collect water sample due to insufficient flow |                 |                           |                                 |      |                                    |
| 27 Feb 2019 | 14:05 | Sunny             |   | Unable          | to collect water samp     | le due to insufficient f        | flow |                                    |
|             |       |                   |   |                 | Average                   | -                               | -    | -                                  |
|             |       |                   |   |                 | Min                       | -                               | -    | -                                  |
|             |       |                   |   |                 | Max                       | -                               | -    | -                                  |

#### Table F2.2Surface Water Quality Monitoring Results at DP4

| Date        | Time  | Weather Condition | Water Appearance  | Water Condition | Water<br>Temperature (ºC) | Dissolved Oxygen<br>(DO) (mg/L) | рН   | Suspended<br>Solids (SS)<br>(mg/L) |
|-------------|-------|-------------------|---|-----------------|---------------------------|---------------------------------|------|------------------------------------|
| 8 Feb 2019  | 10:30 | Sunny             |   | Unable          | to collect water sam      | ple due to insufficient f       | flow |                                    |
| 13 Feb 2019 | 14:35 | Sunny             | Unable to collect water sample due to insufficient flow |                 |                           |                                 |      |                                    |
| 20 Feb 2019 | 14:15 | Sunny             | Unable to collect water sample due to insufficient flow |                 |                           |                                 |      |                                    |
| 27 Feb 2019 | 14:12 | Sunny             |   | Unable          | to collect water sam      | ple due to insufficient f       | flow |                                    |
|             |       | -                 |   |                 | Average                   | 2 -                             | -    | -                                  |
|             |       |                   |   |                 | Min                       | 1 -                             | -    | -                                  |
|             |       |                   |   |                 | Max                       | ζ -                             | -    | -                                  |

#### Table F2.3 Surface Water Quality Monitoring Results at DP6

| Date        | Time  | Weather Condition | Water Appearance  | Water Condition | Water<br>Temperature (ºC) | Dissolved Oxygen<br>(DO) (mg/L) | рН  | Suspended<br>Solids (SS)<br>(mg/L) |
|-------------|-------|-------------------|---|-----------------|---------------------------|---------------------------------|-----|------------------------------------|
| 8 Feb 2019  | 10:03 | Sunny             |   | low             |                           |                                 |     |                                    |
| 13 Feb 2019 | 14:19 | Sunny             |   | low             |                           |                                 |     |                                    |
| 20 Feb 2019 | 14:26 | Suuny             | Unable to collect water sample due to insufficient flow |                 |                           |                                 |     |                                    |
| 27 Feb 2019 | 14:21 | Sunny             |   | Unable          | to collect water samp     | ole due to insufficient f       | low |                                    |

ENVIRONMENTAL RESOURCES MANAGEMENT

GREEN VALLEY LANDFILL LTD.

| Date | Time | Weather Condition | Water Appearance | Water Condition | Water<br>Temperature (ºC) | Dissolved Oxygen<br>(DO) (mg/L) | рН | Suspended<br>Solids (SS)<br>(mg/L) |
|------|------|-------------------|------------------|-----------------|---------------------------|---------------------------------|----|------------------------------------|
|      |      |                   |                  |                 | Average                   | -                               | -  | -                                  |
|      |      |                   |                  |                 | Min                       | -                               | -  | -                                  |
|      |      |                   |                  |                 | Max                       | -                               | -  | -                                  |

Event and Action Plan for Surface Water Quality Monitoring

| Event   | Action   |   |  |  |  |  |  |
|---|--|---|--|--|--|--|--|
|   | ET   | IEC   | Contractor   |  |  |  |  |
| Action Level being<br>exceeded by one<br>sampling day                 | <ul> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Repeat measurement on the next day of exceedance if exceedance is due to the Project</li> </ul>   | <ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> </ul>  | <ul> <li>Rectify any unacceptable practice</li> <li>Amend working methods if<br/>appropriate</li> </ul>  |  |  |  |  |
| Action Level being<br>exceeded by two<br>consecutive<br>campling days | <ul> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project and continue until no exceedance of Action Level</li> </ul> | <ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET Leader and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul> | <ul> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul> |  |  |  |  |

### Annex F3 Event and Action Plan for Surface Water Quality During Construction Phase

| Event   | Action  |  |   |  |  |  |  |
|---|---|--|---|--|--|--|--|
|   | ET  | IEC  | Contractor  |  |  |  |  |
| Limit Level being<br>exceeded by two<br>consecutive<br>sampling days              | <ul> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify source(s) of impact and cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level</li> </ul>   | <ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on<br/>proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial<br/>measures</li> <li>Audit the effectiveness of the implemented<br/>remedial measures</li> </ul> | <ul> <li>Critically review the working methods</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and propose mitigation measures to the IEC</li> <li>Implement the agreed mitigation measures</li> <li>Increase</li> </ul>  |  |  |  |  |
| Limit Level being<br>exceeded by more<br>than two<br>consecutive<br>sampling days | <ul> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify source(s) of impact and cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure mitigation measures are implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level for two consecutive days</li> </ul> | <ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on<br/>proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial<br/>measures</li> <li>Audit the effectiveness of the implemented<br/>remedial measures</li> </ul> | <ul> <li>Critically review the working methods</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and propose<br/>mitigation measures</li> <li>Implement the agreed mitigation measures</li> <li>As directed by the Project Proponent, slow<br/>down or stop all or part of the construction<br/>activities</li> </ul> |  |  |  |  |

Annex G

Cumulative Statistics on Exceedances, Environmental Complaints, Notification of Summons and Status of Prosecutions

#### Table G1Cumulative Statistics on Exceedances

|                         |        | Total No. recorded in this reporting period | Total No. recorded<br>since project<br>commencement |
|-------------------------|--------|---|---|
| Air Quality (24-hr TSP) | Action | 0   | 0   |
|                         | Limit  | 0   | 0   |
| Noise                   | Action | 0   | 0   |
|                         | Limit  | 0   | 0   |
| Surface Water Quality   | Action | 0   | 0   |
|                         | Limit  | 0   | 0   |

# Table G2Cumulative Statistics on Complaints, Notifications of Summons and<br/>Successful Prosecutions

| <b>Reporting Period</b>                             | Cumulative Statistics |                          |              |  |  |  |
|---|-----------------------|--------------------------|--------------|--|--|--|
| _   | Complaints            | Notifications of Summons | Prosecutions |  |  |  |
| This Reporting Period<br>(1 – 28 February 2019)     | 0                     | 0                        | 0            |  |  |  |
| Total no. received<br>since project<br>commencement | 0                     | 0                        | 0            |  |  |  |

Annex H

Monitoring Schedule for the Next Reporting Period

### South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

| March 2019<br>Sun     | Mon                   | Tue                  | Wed  | Thu  | Fri  | Sat                   |
|-----------------------|-----------------------|----------------------|--|--|--|-----------------------|
|                       |                       |                      |  |  | 1  | 2                     |
| 3                     | 4                     | 5<br>Dust Monitoring | 6  | 7<br>Surface Water Monitoring<br>Noise Monitoring  | 8  | 9                     |
| 10                    | 11<br>Dust Monitoring | 12                   | 13<br>Surface Water Monitoring<br>Noise Monitoring |  | 15   | 16                    |
| 17<br>Dust Monitoring | 18                    | 19                   | 20   | 21   | 22<br>Surface Water Monitoring<br>Noise Monitoring | 23<br>Dust Monitoring |
| 24                    | 25                    | 26                   | 27   | 28<br>Surface Water Monitoring<br>Noise Monitoring | 29<br>Dust Monitoring                              | 30                    |
| 31                    |                       |                      |  |  |  |                       |

March 2019

#### Note:

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.