



South East New Territories (SENT) Landfill Extension

Monthly Environmental Monitoring & Audit Report No.15 for March 2020

April 2020

ERM

2507, 25/F One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong T: 2271 3000 F: 2723 5660 www.erm.com





South East New Territories (SENT) Landfill Extension

Environmental Certification Sheet EP-308/2008/B and FEP-01/308/2008/B

Reference Document/Plan

Document/Plan to be Certified/Verified:

Monthly Environmental Monitoring & Audit Report No.15

for March 2020 for South East New Territories (SENT)

Landfill Extension

Date of Report:

7 April 2020

Reference EP Condition

EP Condition:

Condition No. 3.4

Four hard copies and one electronic copy of monthly EM&A Report shall be submitted to the Director within 10 working days after the end of the reporting month. The EM&A Reports shall include a summary of all non-compliance (exceedances) of the environmental quality performance limits (Action and Limit Levels). The submissions shall be verified by the IEC. Additional copies of the submission shall be provided to the Director upon request by the Director.

ET Certification

I hereby certify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

Warchitt.

Frank Wan,

Environmental Team Leader:

(ERM Hong-Kong, Limited)

Date:

7 April 2020

IEC Verification

I hereby verify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

W.K. Chiu,

Independent Environmental Checker:

(Meinhardt Infrastructure and

Environment Limited)

Date: 8/4/2020

South East New Territories (SENT) Landfill Extension

Monthly Environmental Monitoring & Audit Report for March 2020

Environmental Resources Management

2507, 25/F, One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong

Telephone: (852) 2271 3000 Facsimile: (852) 2723 5660 E-mail: post.hk@erm.com http://www.erm.com

Client:		Projec	t No:			
Green Valley Landfill Ltd.			0465169			
Summary:		Date:	Date:			
		7 Ap	7 April 2020			
This document presents the Monthly EM&A Report No.15 for March 2020 for South East New Territories (SENT) Landfill Extension		Approved by: Auchty				
		Frank Wan Partner				
0	Monthly EM&A Report No.15 (for March 2020)	AL	FW	FW	7 Apr 20	
Revision	Description	Ву	Checked	Approved	Date	
This report has been prepared by Environmental Resources Management the trading name of 'ERM Hong-Kong, Limited', with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business		Distribution				
and taking account of the resources devoted to it by agreement with the client.			Internal	C	OHSAS 18001:2007 ertificate No. OHS 515956	
We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.		\boxtimes	Public		BSI	
to third parti	s confidential to the client and we accept no responsibility of whatsoever nature es to whom this report, or any part thereof, is made known. Any such party report at their own risk.		Confide		15O 9001 : 2008 Certificate No. FS 32515	



CONTENTS

EXECUT	TIVE SUMMARY	1
1	INTRODUCTION	1
1.1	BACKGROUND	1
1.2	PROJECT DESCRIPTION	1
1.3	SCOPE OF THE EM&A REPORT	2
1.4	PROJECT ORGANISATION	2
1.5	SUMMARY OF CONSTRUCTION WORKS	3
1.6	SUMMARY OF EM&A PROGRAMME REQUIREMENTS	4
1.7	STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE	
	ENVIRONMENTAL PERMIT	5
1.8	STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS	6
2	EM&A RESULTS	7
2.1	AIR QUALITY MONITORING	7
2.2	Noise Monitoring	9
2.3	SURFACE WATER QUALITY MONITORING	10
2.4	LANDSCAPE AND VISUAL MONITORING	12
2.5	EM&A SITE INSPECTION	12
2.6	WASTE MANAGEMENT STATUS	14
2.7	IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES	15
2.8	SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMA	NCE
	LIMIT	1 5
2.9	SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL	
	PROSECUTIONS	15
3	FUTURE KEY ISSUES	16
3.1	CONSTRUCTION PROGRAMME FOR THE COMING MONTH	16
3.2	KEY ISSUES FOR THE COMING MONTH	16
3.3	MONITORING SCHEDULE FOR THE COMING MONTH	17
4	CONCLUSION AND RECOMMENDATION	18

ANNEXES

ANNEX B ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

ANNEX C MONITORING SCHEDULE FOR THIS REPORTING PERIOD

ANNEX D AIR QUALITY

ANNEX A WORK PROGRAMME

ANNEX D1 CALIBRATION CERTIFICATES FOR DUST MONITORING EQUIPMENT

ANNEX D2 24-HOUR TSP MONITORING RESULTS

ANNEX D3 EVENT AND ACTION PLAN FOR DUST MONITORING

ANNEX D4 METEOROLOGICAL DATA

ANNEX E NOISE

ANNEX E1 CALIBRATION CERTIFICATES FOR NOISE MONITORING EQUIPMENT

ANNEX E2 Noise Monitoring Results

ANNEX E3 EVENT AND ACTION PLAN FOR NOISE MONITORING

ANNEX F SURFACE WATER QUALITY

ANNEX F1 CALIBRATION CERTIFICATES FOR SURFACE WATER QUALITY MONITORING EQUIPMENT

ANNEX F2 SURFACE WATER QUALITY MONITORING RESULTS

ANNEX F3 EVENT AND ACTION PLAN FOR SURFACE WATER QUALITY MONITORING

ANNEX G CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL COMPLAINTS, NOTIFICATION OF SUMMONS AND STATUS OF PROSECUTIONS

ANNEX H MONITORING SCHEDULE FOR THE NEXT REPORTING PERIOD

EXECUTIVE SUMMARY

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction, operation/restoration and aftercare of SENTX Project ("the Project") in accordance with the requirements specified in the Environmental Permit (EP), updated Environmental Monitoring and Audit (EM&A) Manual, the approved Environmental Impact Assessment (EIA) Report of the Project taking account of the latest design and other relevant statutory requirements. The construction (not including works related to site clearance and preparation) of the Project commenced on 2 January 2019.

This Monthly EM&A report presents the EM&A works carried out during the period from 1 to 31 March 2020 for the Project in accordance with the updated EM&A Manual.

Exceedance of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Levels for construction air quality monitoring was recorded in the reporting period.

Exceedance of Action and Limit Levels for Noise

No exceedance of Action and Limit Levels for construction noise monitoring was recorded in the reporting period.

Exceedance of Action and Limit Levels for Surface Water Quality

Sampling could not be carried out for all the scheduled impact surface water quality monitoring events during the reporting period due to insufficient flow.

Environmental Complaints, Summons and Prosecutions

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Reporting Change

There was no reporting change in the reporting period.

Future Key Issues

Potential environmental impacts arising from the upcoming construction activities in the next reporting period of April 2020 are mainly associated with the potential surface water impact in the rainy season.

1 INTRODUCTION

1.1 BACKGROUND

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. The *Environmental Impact Assessment (EIA) Report* and the associated *Environmental Monitoring and Audit (EM&A) Manual* for the construction, operation, restoration and aftercare of the SENTX (hereafter referred to as "the Project") have been approved under the *Environmental Impact Assessment Ordinance (EIAO)* in May 2008 (Register No.: AEIAR-117/2008) (hereafter referred to as the approved EIA Report) and an Environmental Permit (EP-308/2008) (EP) was granted by the Director of Environmental Protection (DEP) on 5 August 2008.

Since then, applications for Variation of an Environmental Permit (No. VEP-531/2017) were submitted to EPD and the Variation of Environmental Permits (EP-308/2008/A and EP-308/2008/B) were granted on 6 January 2012 and 20 January 2017, respectively, as the Hong Kong SAR Government has decided to reduce the scale of the design scheme of SENTX assessed in the approved EIA Report and SENTX will only receive construction waste. In May 2018, a Further Environmental Permit (FEP) (FEP-01/308/2008/B) was granted to the SENTX's contractor, Green Valley Landfill, Limited (GVL).


ERM-Hong Kong, Limited (ERM) and Meinhardt Infrastructure and Environment Limited (Meinhardt) are commissioned to undertake the roles of Environmental Team (ET) and the Independent Environmental Checker (IEC), respectively, to undertake the EM&A activities for the Project in accordance with the requirements specified in the EP, updated EM&A Manual (1), approved EIA Report (2) taking account of the latest design and other relevant statutory requirements.

1.2 PROJECT DESCRIPTION

The SENTX is a piggyback landfill, occupying the southern part of the existing SENT Landfill (including its infrastructure area) and 13 ha of Tseung Kwan O (TKO) Area 137. A layout plan of the SENTX is shown in *Figure 1.1*. Under the latest design, the SENTX has a net void capacity of about 6.5 Mm³ and provides an additional lifespan of about 6 years, commencing operation upon exhaustion of the SENT Landfill. The SENTX will receive construction waste only.

⁽¹⁾ ERM (2018). South East New Territories (SENT) Landfill Extension: Environmental Monitoring & Audit Manual

⁽²⁾ ERM (2007). South East New Territories (SENT) Landfill Extension - Feasibility Study: Environmental Impact Assessment Report

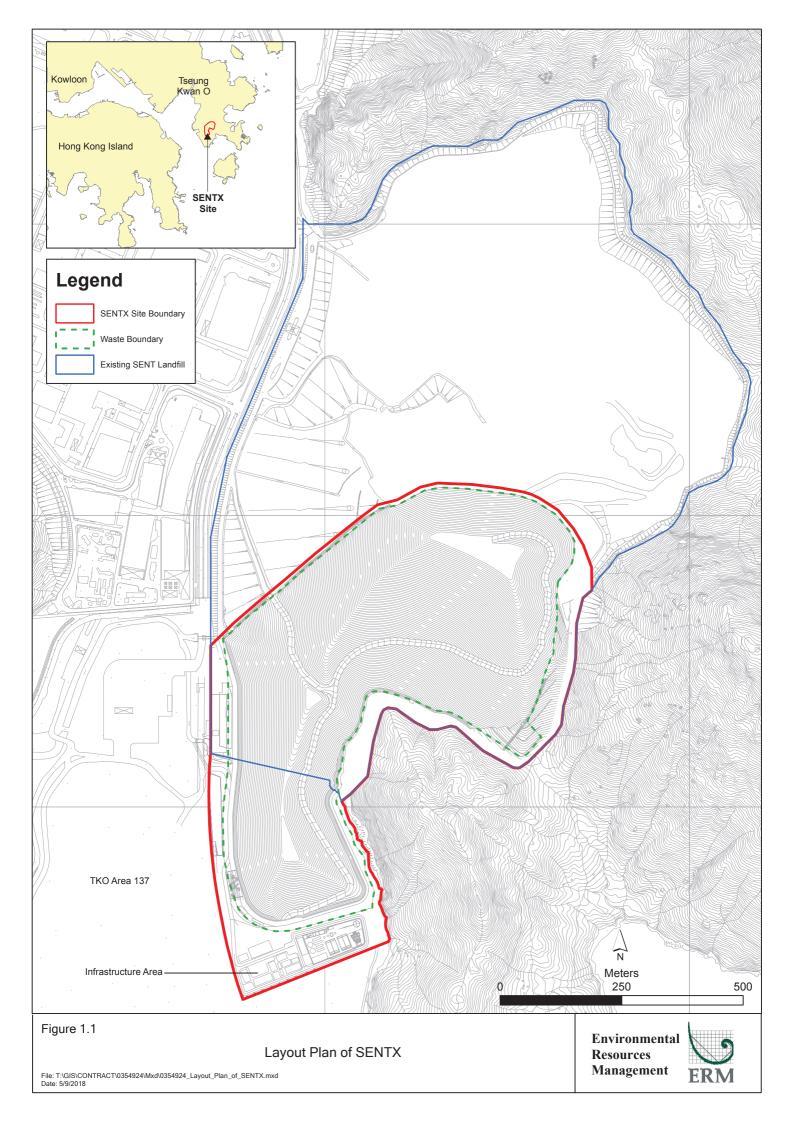

The key implementation milestones of the Project are indicatively summarised in *Table 1.1*. The construction works of the Project commenced on 2 January 2019.

 Table 1.1
 Estimated Key Dates of Implementation Programme

Key Stage of the Project	Indicative Date
Start construction	2 January 2019
Commissioning of new infrastructure facilities	2020
Demolition of existing infrastructure facilities	2021
Start waste intake at SENTX	2021 or upon exhaustion of SENT Landfill
Estimated exhaustion date of SENTX	2027
End of aftercare for SENTX	2057

The major construction works of the SENTX includes:

- Site formation at the TKO Area 137 and the existing infrastructure area at SENT Landfill;
- Construction of surface and groundwater drainage systems;
- Construction of the leachate containment and collection systems;
- Construction of new leachate and landfill gas treatment facilities, site offices, maintenance yards at the new infrastructure area;
- Construction of new pipelines to transfer the leachate and landfill gas collected from the existing SENT Landfill to the treatment facilities at the new infrastructure area:
- Construction of the site access and new waste reception facilities; and
- Demolition of the facilities at the existing SENT Landfill infrastructure area.


1.3 Scope of the EM&A Report

This is the Monthly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 to 31 March 2020 for the construction works.

1.4 PROJECT ORGANISATION

The organisation structure of the Project is presented in *Figure 1.2*.

Figure 1.2 Organisation Chart

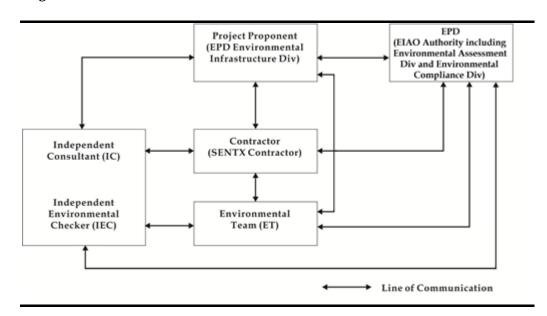

Contact details of the key personnel are summarised in *Table 1.2* below.

Table 1.2 Contact Information of Key Personnel

Party	Position	Name	Telephone
Contractor	Project Manager	Gary Barnicott	2706 8827
(Green Valley Landfill			
Limited)			
Environmental Team (ET)	ET Leader	Frank Wan	2271 3152
(ERM-Hong Kong, Limited)			
Independent Environmental	IEC	W.K. Chiu	2859 1881
Checker (IEC)			
(Meinhardt Infrastructure			
and Environment Limited)			

1.5 SUMMARY OF CONSTRUCTION WORKS

The programme of the construction is shown in *Annex A*. As informed by the Contractor, the major works carried out in this reporting period include:

- Building services works and fitting-out works for Landfill Gas Plant area;
- Building services works and fitting-out works for infrastructure buildings (EPD building, GVL building and laboratory building);
- Installation of accessories such as staircases, pipes and walkways for equalization tanks, sequencing batch reactor tanks, treated effluent tank, Glass Reinforced Plastic (GRP) tanks and other tanks at Leachate Treatment Plant (LTP) area;
- Placing leachate stone at Cell 2X;

- Maintenance and improvement of the temporary surface water drainage;
- Shotcreting and mass concrete for Buttress Wall;
- Finishing works for Western perimeter bund;
- Construction of perimeter bund channel;
- Installation of monitoring well LFG23;
- Construction of superstructure of fire service tank room and water service room; and
- Construction of pits and ducting for underground utilities.

The implementation schedule of the mitigation measured recommended in the Updated EM&A Manual is presented in *Annex B*.

1.6 SUMMARY OF EM&A PROGRAMME REQUIREMENTS

The status for all environmental aspects are presented in *Table 1.3*. The EM&A requirements remained unchanged during the reporting period.

Table 1.3 Summary of Status for the Environmental Aspects under the Updated EM&A Manual

Parameters	Status
Air Quality	
Baseline Monitoring	The results of baseline air quality monitoring were reported in
	Baseline Monitoring Report and submitted to EPD under EP
	Condition 3.3
Impact Monitoring	On-going On-going
Noise	
Baseline Monitoring	The results of baseline noise monitoring were reported in
	Baseline Monitoring Report and submitted to EPD under EP
	Condition 3.3
Impact Monitoring	On-going On-going
Surface Water Quality	
Baseline Monitoring	The results of baseline surface water quality monitoring were
	reported in Baseline Monitoring Report and submitted to EPD
	under EP Condition 3.3
Impact Monitoring	On-going On-going
Waste Management	
Waste Monitoring	On-going On-going
Landscape and Visual	
Baseline Monitoring	The results of baseline landscape and visual monitoring were
	reported in Baseline Monitoring Report and submitted to EPD
	under EP Condition 3.3
Construction Phase Audit	On-going On-going
Site Environmental Audit	
Regular Site Inspection	On-going On-going
Complaint Hotline and Email	On-going On-going
Channel	
Environmental Log Book	On-going On-going
Groundwater Quality	

Parameters	Status
Pre-operation Baseline	Commenced on 24 March 2020
Monitoring	
Landfill Gas	
Pre-operation Baseline	Commenced on 24 March 2020
Monitoring	

Taking into account the construction works, impact monitoring of air quality, noise, surface water quality and waste management were carried out in the reporting period. The impact monitoring schedule of air quality, noise and surface water quality monitoring are provided in *Annex C*. Groundwater and landfill gas pre-operation baseline monitoring were commenced on 24 March 2020.

The EM&A programme also involved environmental site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation measures recommended in the approved EIA Report and relevant EP submissions. To promote the environmental awareness and enhance the environmental performance of the contractors, environmental trainings and regular environmental management meetings were conducted during the reporting period, which are summarised as below:

- One environmental management meeting was held with the Contractor, ER, ET, IEC and EPD on 19 March 2020; and
- Environmental toolbox trainings on Mosquito Control and Illegal
 Dumping were provided on 8 March and 25 March 2020 respectively by
 the Contractor to the workers.

1.7 STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT

The status of statutory environmental compliance with the EP conditions under the EIAO, submission status under the EP and implementation status of mitigation measures are presented in *Table 1.4*.

Table 1.4 Status of Submissions required under the EP and Implementation Status of Mitigation Measures

EP	Submission/Implementation Status	Status
Condition		
2.3	Management Organisation of Main	Submitted and accepted by EPD.
	Construction Companies	
2.4	Setting up of Community Liaison Group	Community Liaison Group was set up.
2.5	Submission of Detailed Landfill Gas	Submitted and accepted by EPD on 10
	Hazard Assessment Report	January 2019.
2.6	Submission of Restoration and Ecological	Submitted to EPD on 28 June 2019.
	Enhancement Plan	
2.7	Setting up of Trial Nursery	Trial Nursery works was commenced
		on 28 August 2019.
2.8	Advance Screen Planting	Advance Screen Planting works were
		completed on 28 June 2019.

EP	Submission/Implementation Status	Status
Condition		
2.9	Provision of Multi-layer Composite Liner	Under implementation.
	System	

1.8 STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS

The environmental licenses and permits (including EP, *Water Pollution Control Ordinance* (WPCO) discharge license, registration as a chemical waste producer, and construction noise permit) that are valid in the reporting period are presented in *Table 1.5*. No non-compliance with environmental statutory requirements was identified.

 Table 1.5
 Status of Statutory Environmental Requirements

Description	Ref No.	Status
Environmental Permit	EP-308/2008	Granted on 5 August 2008
Variation of Environmental Permit	EP-308/2008/A	Granted on 6 January 2012
	EP-308/2008/B	Granted on 20 January 2017
Further Environmental Permit	FEP-01/308/2008/B	Granted on 16 May 2018
Water Discharge License under	Licence No.: WT00033525-	Validity from 27 March
WPCO (Permit Holder: Chun Wo)	2019	2019 to 31 March 2024
Billing Account for Disposal of	Chit Account Number:	Approved on 28 December
Construction Waste	5001692	2005
Registration as a Chemical Waste	5213-839-C3507-10	Issued on 23 August 2018
Producer (Permit Holder: Chun Wo)		
Registration as a Chemical Waste	5518-839-R2289-06	Issued on 24 October 2019
Producer (Permit Holder: REC)		
Construction Noise Permit (Permit	GW-RE0075-20	Validity from 12 February
Holder: GVL)		2020 to 11 August 2020
Construction Noise Permit (Permit	GW-RE1001-19	Validity from 16 December
Holder: Chun Wo)		2019 to 10 June 2020
Construction Noise Permit (Permit	GW-RE0029-20	Validity from 20 January
Holder: REC)		2020 to 31 May 2020

2 EM&A RESULTS

The EM&A programme for the Project required environmental monitoring for air quality, noise and surface water quality as well as environmental site inspections for air quality, noise, surface water quality, waste management, and landscape and visual impacts. The EM&A requirements and related findings for each component are summarised in the following sections.

2.1 AIR QUALITY MONITORING

2.1.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact air quality monitoring (dust, in term of Total Suspended Particulates (TSP)) was carried out at the two designated monitoring locations (i.e. DM1 and DM2) at a 6-day interval. As there are two existing TSP monitoring stations (i.e. TKO-A1 and TKO-A2a) currently operating by the Civil Engineering and Development Department (CEDD) to monitor the 24-hour TSP levels at the proposed dust monitoring stations for the SENTX, it is considered that the CEDD monitoring data can represent the dust condition of the SENTX during the construction phase.


The Action and Limit Levels of the air quality monitoring is provided in *Table* 2.1 below.

Table 2.1 Action and Limit Levels for 24-hour TSP

Monitoring Station	Action Level	Limit Level
DM-1 – Site Egress of TKO Area 137 Fill Bank	204 μg m- ³	260 μg m- ³
DM-2A -Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank	193 μg m- ³	260 μg m- ³

High volume air samplers (HVSs) in compliance with the specifications listed under Section 3.2.2 of the updated EM&A Manual were used to measure 24-hour TSP levels at the CEDD dust monitoring stations. The HVSs were calibrated upon installation and thereafter at bi-monthly intervals to check the validity and accuracy of the results.

The equipment used in the impact air quality monitoring programme and monitoring locations are summarised in *Table 2.2* and illustrated in *Figure 2.1* respectively. Copies of the calibration certificates for the equipment are presented in *Annex D1*.

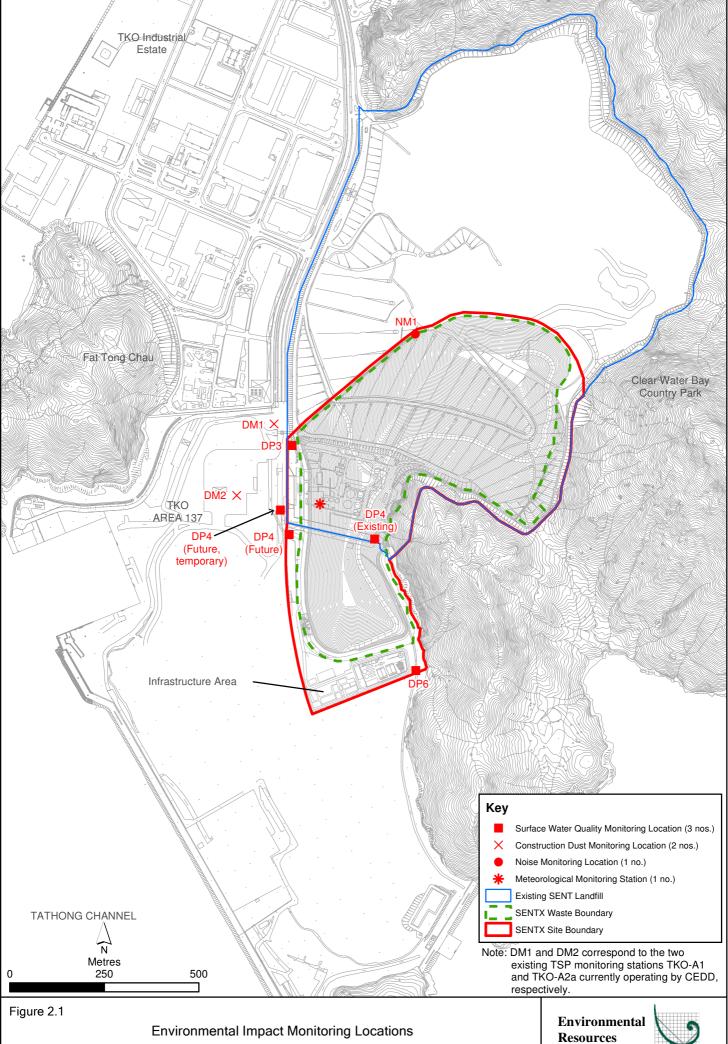

 $File: T. \\ IGIS/CONTRACT/0465169 \\ Imxd/0465169 \\ Environmental_Impact_Monitoring_Locations. \\ mxd/Date: 28/5/2019$

Management



Table 2.2 Dust Monitoring Details

Monitoring Station	Location	Parameter	Frequency and Duration	Monitoring Dates	Equipment
DM1	Site Egress of TKO Area 137 Fill Bank	24-hour TSP	Once every 6 days during the construction	5, 11, 17, 23, 29 March 2020	HVS Greasby 105 (S/N: 9795 (ET/EA/003/18))
DM2	Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank		phase of the Project		HVS Andersen G1051 (S/N: 1176 (ET/EA/003/05))

2.1.2 Monitoring Schedule for the Reporting Month

The schedule for air quality monitoring during the reporting period is provided in *Annex C*.

2.1.3 Results and Observations

The monitoring results for 24-hour TSP are summarised in *Table 2.3*. The detailed monitoring results and the graphical presentation of the 24-hour TSP results at each monitoring location are provided in *Annex D2*.

Table 2.3 Summary of 24-hour TSP Monitoring Results in the Reporting Period

Monitoring Station	Average 24-hr TSP Concentration (μg m ⁻³) (Range in bracket)	Action Level (μg/m³)	Limit Level (μg/m³)	
DM-1 – Site Egress of TKO Area 137 Fill Bank	102 (91 - 113)	204	260	
DM-2A -Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank	90 (85– 94)	193	260	

The major dust sources in the reporting period included fugitive dust emission from exposed area in SENTX, as well as nearby operations of the existing SENT landfill and the TKO Area 137 Fill Bank.

All the 24-hour TSP results were below the Action and Limit Levels at the monitoring locations in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex D3*.

2.1.4 Meteorological Data

Meteorological data obtained from the on-site meteorological monitoring station at the existing SENT landfill (see *Figure 2.1*) were used for the dust monitoring and are shown in *Annex D4*. The meteorological station will be relocated to a new position for SENTX as per the updated EM&A Manual after the new infrastructure area at the SENTX is constructed. It is

considered that meteorological data obtained at the existing the on-site meteorological monitoring station are representative of the Project area and could be used for the construction phase dust monitoring programme for the Project.

2.2 Noise Monitoring

2.2.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact noise monitoring was conducted weekly at the monitoring location (i.e. NM1) to obtain one set of 30 minutes measurement between 07:00 and 19:00 hours on normal weekdays.

The Action and Limit Levels for construction noise of the Project are provided in *Table 2.4* below.

Table 2.4 Action and Limit Levels for Construction Noise

Time Period	Action Level (a)	Limit Level (b)
07:00 - 19:00 hrs on normal weekdays	When one documented complaint is received from any one of the noise sensitive receivers (NSRs)	75 dB(A) at NSRs
	or	
	75 dB(A) recorded at the monitoring station	

Notes:

- (a) 75dB(A) along and at about 100m from the SENTX site boundary was set as the Action Level.
- (b) Limits specified in the GW-TM and IND-TM for construction and operational noise, respectively.

Noise monitoring was performed by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066) using sound level meter at the designated monitoring station NM1 (see *Figure 2.1*) in accordance with the requirements stipulated in the updated EM&A Manual. Acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. Details of the deployed equipment are provided in *Table 2.5*. Copies of the calibration certificates for the equipment are presented in *Annex E1*.

Table 2.5 Noise Monitoring Details

Monitoring Station (1)	Location	Parameter	Frequency and Duration	Monitoring Dates	Equipment
NM1	SENTX Site Boundary (North)	L _{eq (30 min)} measurement between 07:00 and 19:00 hours on normal weekdays	Once per week for 30 mins during the construction period of the	5, 12, 18, 26 March 2020	Sound Level Meter: B&K 2238 (S/N: 2285762)
		(Monday to Saturday)	Project		Calibrator: Rion NC-74 (S/N: 34657231)

2.2.2 Monitoring Schedule for the Reporting Month

The schedule for noise monitoring during the reporting period is provided in *Annex C*.

2.2.3 Results and Observations

A total of 4 impact noise monitoring events were scheduled during the reporting period. However, monitoring was not conducted on 18 March 2020 due to adverse weather condition. Results for noise monitoring are summarised in *Table 2.6*. The monitoring results and the graphical presentation of the data are provided in *Annex E2*.

Table 2.6 Summary of Construction Noise Monitoring Results in the Reporting Period

Monitoring Station	Measured Noise Level L _{eq (30 min)} , dB(A)					
	Average	Range	Action and Limit Level			
NM1	52.5	50.5 - 54.9	75			

Major noise sources identified during the noise monitoring included noise from operations of the existing SENT landfill and the TKO Area 137 Fill Bank, aircrafts and insects.

No Action and Limit Levels exceedance was recorded for construction noise monitoring in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex E3*.

2.3 SURFACE WATER QUALITY MONITORING

2.3.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact surface water quality monitoring were carried out at the three designated surface water discharge points (i.e. DP3, DP4 and DP6) weekly to ensure that the SENTX will not cause adverse water quality impact. Temporary relocation of surface water discharge point DP4 to DP4 (Future, temporary) as an interim

arrangement due to site constraints and construction sequence was approved by EPD on 14 May 2019. Surface water quality monitoring was carried out at DP4 (Future, temporary) (i.e. DP4T) from the monitoring event on 16 May 2019. In addition, suspension of impact surface water quality monitoring at DP3 was approved under the Baseline Monitoring Report by EPD on 24 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

Dissolved Oxygen (DO) and pH value were measured in-situ whereas the level of suspended solids (SS) were determined by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066).

The Action and Limit Levels of the surface water quality impact monitoring are provided in *Table 2.7*.

Table 2.7 Action and Limit Levels for Surface Water Quality

Parameters	Action Level	Limit Level	
	DP4 & DP6		
DO	< 5.80 mg/L	< 5.42 mg/L	
SS	> 11.7 mg/L	> 12.7 mg/L	
рН	> 8.39	> 8.40	

The locations of the monitoring stations for the Project are shown in *Figure* 2.1. All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the surface water quality monitoring programme. Calibration for a DO meter was carried out before measurement according to the instruction manual of the equipment model. Details of the equipment used in the impact surface water quality monitoring works are provided in *Table* 2.8. Copies of the calibration certificates for the equipment are presented in *Annex F1*.

Table 2.8 Impact Surface Water Quality Monitoring Details

Monitoring Station	Location	Frequency	Monitoring Dates	Parameter	Equipment
DP4 (Future, temporary)	Surface water discharge point DP4	Weekly	5, 12, 18, 26 March 2020	•pH •DO	YSI Professional Plus (S/N: 17B102764)
DP6	Surface water discharge point DP6	-		•SS	

Notes:

- (a) DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.
- (b) Impact surface water quality monitoring at DP3 was suspended from the monitoring event on 25 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

2.3.2 Monitoring Schedule for the Reporting Month

The schedule for surface water quality monitoring during the reporting period is provided in *Annex C*.

2.3.3 Results and Observations

A total of 4 monitoring events for impact surface water quality monitoring were scheduled at all designated monitoring stations during the reporting period. However, sampling could not be carried out for all scheduled events during the reporting period due to insufficient flow. Details of impact water quality monitoring events are provided in *Annex F2*.

No actions is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex F3*.

2.4 LANDSCAPE AND VISUAL MONITORING

2.4.1 Monitoring Requirements

According to the updated EM&A Manual of the Project, the monthly landscape and visual audit was conducted on 25 March 2020 to monitor the implementation of the landscape and visual mitigation measures during construction phase.

All relevant environmental mitigation measures listed in the approved EIA Report and the updated EM&A Manual and their implementation status are summarised in *Annex B*.

2.4.2 Results and Observations

The Contractor has implemented environmental mitigation measures as stated in the approved EIA Report and the EM&A Manual.

Regarding the landscape and visual audit, the Contractor was reminded to maintain the advance screen planting works as soon as possible to ensure effective screening of views of project works from the High Junk Peak Trail. The Contractor shall consider the mitigation measures during the design phase, including the preparation of the Construction Drawings and Detailed Landscape Design Drawings.

2.5 EM&A SITE INSPECTION

Site inspections were carried out on a weekly basis with the Contractor, IEC and ER to monitor the implementation of proper environmental pollution control and mitigation measures for air quality, noise, surface water quality and waste management under the Project. In the reporting period, 4 site inspections were carried out on 5, 12, 19 and 26 March 2020.

Key observations during the site inspections are summarised in *Table 2.9*.

Table 2.9 Key Observations Identified during the Site Inspection in this Reporting Month

Inspection Date	Environmental Observations and Recommendations
5 March 2020	 The Contractor shall conduct activities related to dusty materials i.e. shotcrete mixing near DP4T channel in an area sheltered on the top and three sides to minimise dust impact.
	• The Contractor shall display NRMM label on the bulldozer near sediment trap.
	• The Contractor shall provide drip trays for chemicals stored near buttress wall, DP4T channel and future GVL building.
	 The Contractor shall remove the stagnant milky water near future bioplant and LTP sump pit and treat as chemical waste.
	 The Contractor shall dispose of the construction waste accumulated near buttress wall regularly.
	 The Contractor shall remove the general refuse near future bioplant to reduce odour and pest issues.
12 March 2020	 The Contractor shall remove the deposited silt and grit in the DP4T channel near buttress wall to ensure the channel is functioning properly.
	 The Contractor shall replace the faded NRMM label on the excavator near DP4T channel.
	 The Contractor shall provide drip tray for the chemical placed near buttress wall.
	 The Contractor shall store the construction waste accumulated near buttress wall in refuse skips and dispose of the waste regularly.
19 March 2020	The Contractor shall maintain the drain along Western site boundary and dispose of the general refuse and chemical waste accumulated in the drain separately.
	The Contractor shall replace the faded NRMM labels on the bulldozer and roller near sediment trap.
	 The Contractor shall provide drip tray for the chemical placed near future GVL building.
	• The Contractor shall avoid accumulation of stagnant water in X10a channel and around future GVL building.
	• The Contractor shall remove the general refuse near future LFG plant and at DP6 channel.
26 March 2020	 The Contractor shall replace the faded NRMM label displayed on the air compressor near buttress wall.
	• The Contractor shall clear the oil spillage at the drip tray near DP6 channel and treat the clean-up materials as chemical waste.
	 The Contractor shall provide drip trays for chemicals placed near DP4T channel and future laboratory building.
	The Contractor shall avoid accumulation of stagnant water in the sump pit near future LTP and treat the water before discharge.
	The Contractor shall store general refuse separately from construction waste in the refuse skip near DP4T channel.
	The Contractor shall dispose of the waste accumulated near buttress wall regularly.

The Contractor has rectified all of the observations identified during environmental site inspections in the reporting period. Key environmental deficiencies identified and the corresponding rectification actions are presented in *Table 2.10*.

Table 2.10 Summary of Environmental Deficiencies Identified and Corresponding Rectification Actions

Deficiencies	Rectifications Implemented	Proposed Additional Control Measures			
Surface Water					
Intercepting channels & drainage system	Reviewed drainage plan.	 Addition of channels. Expedite the construction of permanent sediment trap and discharge culverts. 			
DP channels (design & regular silt removal)	 Carried out regular maintenance and cleaning of channels. DP4 channel: Area near the channel was paved with concrete and a bund was built. DP6 channel: Gravel piles on the channel were covered with concrete which serve as blocks for running water and to divide the channel into several sections. A pump was placed in the water zone in the upstream section to pump water to the Wetsep for treatment prior to the discharge to the last section before the weir plate. DP6: Pipes through the gravel piles between different channel sections were covered with geotextiles to block debris and silt. 	N.A.			
Stockpiles & exposed soil	 Installed silt fencing near surface water channel along DP6 channel. 	Improve soil covering.Compaction and cover for stockpiles and soil slopes.			
Wetsep (treatment capacity & number)	 Reviewed Wetsep capacity. Chemicals dosage of the Wetsep was increased to enhance the efficiency. 	Install additional Wetsep.			
Backflow / ponding during heavy rainfall	Raised with EPD (LDG) and CEDD.	N.A.			

2.6 WASTE MANAGEMENT STATUS

The Contractor has registered as chemical waste producer under the Contract. Sufficient numbers of receptacles were available for general refuse collection and sorting.

As informed by the Contractor, waste generated during this reporting period include mainly non-inert C&D materials. Reference has been made to the waste flow table prepared by the Contractor. The quantities of different types of wastes and imported fill materials are summarised in *Table 2.11*.

Table 2.11 Quantities of Different Waste Generated and Imported Fill Materials

Month/ Year	Inert C&D Materials (a) (in '000m³)		ted Fill 0kg) ^(b) Soil	Inert Construction Waste Re- used (in '000m³)	Non-inert Construction Waste (c) (in '000m³)	Recyclable Materials ^(d) (in '000kg)	Chemical Wastes (in '000kg)
1 – 31 March 2020	0.093	0	0	0	0.138	0	0

Notes:

- (a) Inert construction wastes include hard rock and large broken concrete, and materials disposed as public fill. Density assumption: 1.6 (kg/L) for public fill.
- (b) Imported fill refers to materials generated from other project for on-site resue.
- (c) Non-inert construction wastes include general refuse disposed at landfill. Density assumption: $0.9 \, (kg/L)$ for general refuse.
- (d) Recyclable materials include metals, paper, cardboard, plastics and others.

2.7 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

A summary of the Environmental Mitigation Implementation Schedule is presented in *Annex B*. The necessary mitigation measures were implemented properly for the Project.

2.8 SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANCE LIMIT

The 24-hour TSP monitoring results and construction noise monitoring results complied with the Action and Limit Levels in the reporting period. Impact surface water quality monitoring could not be carried out for all the scheduled events during the reporting period due to insufficient flow.

Cumulative statistics on exceedances is provided in *Annex G*.

2.9 SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Statistics on complaints, notifications of summons, successful prosecutions are summarised in *Annex G*.

3 FUTURE KEY ISSUES

3.1 CONSTRUCTION PROGRAMME FOR THE COMING MONTH

As informed by the Contractor, the major works for the Project in April 2020 will be:

- Excavation and removal of unsuitable fill materials;
- Remaining site formation works at Area X1;
- Filling of perimeter bund for Cell 2X;
- Placing leachate stones at Cell 2X;
- Construction of buttress wall;
- Construction of perimeter wall and plinths at LTP area;
- Building services and fitting-out works for bioplant;
- Installation of ammonia stripping plant with pipe work and control panel room at LTP area;
- Installation of other LTP tanks and equipment;
- Installation of pipes and cables on pipe racks;
- Building service and fitting-out works at new infrastructure buildings;
- Pavement works at landfill gas plant area;
- Building service and fitting-out works at landfill gas plant buildings;
- Construction of perimeter bund channel;
- Construction of groundwater pipe along Eastern side from Cell 3X to 4X;
- Construction of superstructure at maintenance building;
- Installation of monitoring wells;
- Construction of pits and ducting for underground utilities;
- Construction of superstructure of fire service tank room and water services room;
- Enhancement of the external slope surface of perimeter bund of Cell 1X and 2X;
- Installation of gas and leachate HDPE pipe;

- Construction of sump houses; and
- Construction of diesel fuel tank.

3.2 KEY ISSUES FOR THE COMING MONTH

Potential environmental impacts arising from the above upcoming construction activities in the next reporting period of April 2020 are mainly associated with the potential surface water impact in the rainy season. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

3.3 MONITORING SCHEDULE FOR THE COMING MONTH

The tentative schedules for environmental monitoring in April 2020 are provided in *Annex H*.

4 CONCLUSION AND RECOMMENDATION

This EM&A Report presents the findings of the EM&A activities undertaken during the period from 1 to 31 March 2020 in accordance with the updated EM&A Manual and the requirements of the Environmental Permit (*EP*-308/2008/B).

Air quality (24-hour TSP), noise and water quality (DO, pH and SS) monitoring were carried out in the reporting period. Results for air quality monitoring (24-hour TSP) complied with the Action and Limit Levels in the reporting period. No Action and Limit Levels exceedances were recorded for construction noise monitoring. Impact surface water quality monitoring could not be carried out for all the scheduled events during the reporting period due to insufficient flow.

Environmental site inspections were carried out during the reporting period. Recommendations on remedial actions were given to the Contractor for the deficiencies identified during the site inspections.

There were no complaints, notification of summons or prosecution recorded in the reporting period.

The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Annex A

Work Programme

# WI	BS Path Activity Name	Dur Start Finish Total Predecessor Details Float	Successor Details	2018 Q2 Q3 Q4 Q1	2019 20 Q2 Q3 Q4 Q1 Q2	Q3 Q4 Q1	2021 Q2 Q3 Q4 Q1 Q2	2022 2023 Q4 Q1 Q2 Q3
337 338 339								
338 339 340 341 342 343 344 345 346 347 348 349 350								
343 344 345								
345 346 347								
348 349 350								
351 352	SA2.5 Construction (Initial Works)	1153 12-Apr-18 07-Jun-21 705						
353 354 355	SA2.5.02 Advance Works & Site Establishment SA2.5.02.01 Site Establishment & Mobilization 5.02.01 Site Mobilization for Parts X1 & X2	1148 12-Apr-18 02-Jun-21 35 333 12-Apr-18 10-Mar-19 820 30 31-Dec-18 29-Jan-19 820 11-1100: FS, 11-1200: FS	52-1300: FS, M 3. 1: FS, M 3. 2: FS					
356 357 358	5.02.01 52-1100 Site Mobilization for Parts X3, X4 & X5 5.02.01 52-1200 Temporary Office for Employer / ER / IC 5.02.01 52-1300 Hoarding and Fencing Works	30 12-Apr-18 11-May-18 1083 11-1300: FS, 11-1400: FS, 11-1500 60 10-Oct-18 08-Dec-18 0 23-1300: FS 40 30-Jan-19 10-Mar-19 820 52-1000: FS, 52-1100: FS	52-1300: FS, M 3. 1: FF 11-1700: SS, M 3. 1: FS 32-1500: FS, M10. 1: FS -26, M10. 2: FS -13, M10. 3: FS					
359 360	SA2.5.02.02 Site Survey & Investigation Works for Parts X1 & X2 5.02.02 52-1400 Condition Survey	50 31-Dec-18 18-Feb-19 840 25 31-Dec-18 24-Jan-19 840 11-1100: FS, 11-1200: FS	52-1600: FS					
361 362	5.02.02 52-1500 Topographic Survey 5.02.02 52-1600 Site inspection, Review of Condition Survey Report	20 31-Dec-18 19-Jan-19 845 11-1100: FS, 11-1200: FS 25 25-Jan-19 18-Feb-19 840 52-1500: FS, 52-1400: FS	52-1600: FS 32-1500: FS					
363 364 365	SA2.5.02.03 Site Survey & Investigation Works for Parts X3, X4 & X5 5.02.03 52-1700 Condition Survey 5.02.03 52-1800 Topographic Survey	50 12-Apr-18 31-May-18 1103 25 12-Apr-18 06-May-18 1103 11-1300: FS, 11-1400: FS, 11-1500 20 12-Apr-18 01-May-18 1108 11-1300: FS, 11-1400: FS, 11-1500						
366 367 368	5.02.03 52-1900 Site inspection, Review of Condition Survey Report SA2.5.02.04 Environmental Monitoring 5.02.04 52-2000 Installation of Monitoring Stations & Wells (GP & GW)	25 07-May-18 31-May-18 1103 52-1700: FS, 52-1800: FS 975 02-Oct-18 02-Jun-21 35 120 02-Oct-18 29-Jan-19 0 23-1600: FS	32-1500: FS 52-2200: SS 60					
369 370	5.02.04 52-2100 Installation of Monitoring Stations & Wells (GP & GW) on Buttress Wall 5.02.04 52-2200 Conduct Baseline Monitoring for Construction (one month)	120 02-Oct-18 29-Jan-19 0 23-1600: FS 30 01-Dec-18 30-Dec-18 0 52-2000: SS 60, 52-2100: SS 60	52-2200: SS 60 11-1100: FS					
371 372 373	5.02.04 52-2300 Conduct Baseline Monitoring for Operation (one year) SA2.5.03 Civil Engineering Works SA2.5.03.0 Buttress Wall	365 03-Jun-20 02-Jun-21 35 32-1500: FS -400, 53-4500: FS 748 13-Jan-19 29-Jan-21 834 475 02-Mar-19 18-Jun-20 83	12-1400: FS					
374 375	5.03.0 53-1000 Section adj. SENT 5.03.0 53-1100 Diversion of SENT Landfill Gas Pipe	300 13-Apr-19 06-Feb-20 96 11-1300: FS, 23-2500: FS, 53-3000 11-1400: FS 45 07-Feb-20 22-Mar-20 96 23-2500: FS, 53-1000: FS	: FS, 31-1200: FS, 53-1100: FS, 53-1300: FS, 53-3100: FS, M 3. 5: FS -150, M 7: FS 53-1300: FS, 54-4000: FS, M 3. 3: FS	M 3.				
376	5.03.0 53-1200 Section at Cell 4 5.03.0 53-1300 Install Landfill Gas Pipe on Buttress Wall	400 02-Mar-19 04-Apr-20 83 11-1300: FS, 23-2500: FS, 53-3000 75 05-Apr-20 18-Jun-20 83 41-1500: FS, 53-1100: FS, 53-1200						
378 379	SA2.5.03.1 Landfill Cell 1 5.03.1 53-1400 Earth bund (Eastern)	503 13-Jan-19 29-May-20 214 90 04-Aug-19 01-Nov-19 9 11-1100: FS, 23-2500: FS, 53-4200	: FS, 53-2800: FS 53-2000: FS, 53-2300: FS, 53-3400: FS, 63-1000: FS, 63-1100: FS, 63-1200: FS, 63-1300: FS, M 4. 2: FS					
380	5.03.1 53-1500 Earth bund (Southern)	90 26-Apr-19 24-Jul-19 314 11-1100: FS, 23-2500: FS, 53-2800						
381	5.03.1 53-1600 Earth bund (Western) 5.03.1 53-1700 Intercell bund (Cell 1/2)	90 13-Jan-19 12-Apr-19 417 11-1100: FS, 23-2500: FS 75 13-Jan-19 28-Mar-19 432 11-1100: FS, 23-2500: FS	53-1900: FS, 53-2000: FS, 53-2200: FS, 53-3800: FS 53-2000: FS					
383	5.03.1 53-1800 Site Formation 5.03.1 53-1900 Pump Station (PS#1X)	90 13-Jan-19 12-Apr-19 217 11-1100: FS, 23-2500: FS, 31-1300 45 13-Apr-19 27-May-19 507 53-1800: FS, 53-1600: FS	53-1900: FS, 63-1100: FS, 63-1200: FS, 63-1300: FS, M 4. FS -45 53-2100: FS, 53-2200: FS					
385	5.03.1 53-2000 Lining Works 5.03.1 53-2100 Protective Stone Laying & Leachate Collection Pipe	135 02-Nov-19* 15-Mar-20 214 41-1500: FS, 53-1400: FS, 53-1500 53-1700: FS 75 16-Mar-20 29-May-20 214 53-2000: FS, 41-1500: FS, 53-1900	: FS, 53-1600: FS, 53-2100: FS					
387	5.03.1 53-2200 Install Leachate Force Main 5.03.1 53-2300 Install Landfill Gas Pipe on earth bund	75 25-Jul-19 07-Oct-19 449 53-1500: FS, 53-1600: FS, 41-1500: FS, 53-1500: FS, 53-1	: FS, 53-1900: FS 54-2800: FS					
388 389 390	5.03.1 53-2400 Leachate Pipe Connection (Cell 1 to LTP) SA2.5.03.4 Landfill Cell 4	30 09-Mar-20 07-Apr-20 266 23-2500: FS, 54-1000: SS 30 09-Jul-20 07-Aug-20 144	54-2800: FS					
391 392 393	5.03.4 53-2500 Provide Temporary Leachate Pipe on Cell 4 Area SA2.5.03.5 Drainage - Surface Run-Off 5.03.5 53-2600 Construct Cut-Off Channel 12A	30 09-Jul-20 07-Aug-20 144 23-2500: FS, 63-2600: SS -90 740 16-Jan-19 24-Jan-21 839 60 16-Jan-19 16-Mar-19 9 11-1100: FS, 23-2800: FS	54-2800: FS, M 3. 3: FS 53-2700: FS					
394 395	5.03.5 53-2700 Connect Cut-Off Channel 12A to DP6 5.03.5 53-2800 Diversion from Existing Trapezoidal Channel into Channel 12A	20 17-Mar-19 05-Apr-19 9 53-2600: FS, 31-1400: FS, 23-1900 20 06-Apr-19 25-Apr-19 9 53-2700: FS						
396 397	5.03.5 53-2900 Removal of Existing Trapezoidal Channel along Eastern Bund 5.03.5 53-3000 Cut-Off Channel C4 Diversion to Cut-Off Channel 17-2	30 26-Apr-19 25-May-19 9 53-2800: FS 45 16-Jan-19 01-Mar-19 83 11-1300: FS, 23-2800: FS	53-4200: FS 53-1000: FS, 53-1200: FS					
398 399 400	5.03.5 53-3100 Cut-Off Channel X5 on Buttress Wall, Cell 4, Cell 3 5.03.5 53-3200 Temporary Diversion Cut-Off Channel X5 to 12A 5.03.5 53-3300 Culvert X5 (5m long) & Perm Connection of Cut-Off Channel X5	90 05-Apr-20 03-Jul-20 289 53-1000: FS, 53-1200: FS 20 04-Jul-20 23-Jul-20 289 53-3100: FS, 23-1900: FS 30 26-Dec-20 24-Jan-21 134 53-4100: FF, 63-1900: FS, 53-3200	53-3200: FS 53-3300: FS, M 3. 4: FS : FS 32-1500: FS					
401	5.03.5 53-3400 Construct Perimeter Channel X6 on Eastern Bund & Southern Bund of Cell 1 5.03.5 53-3500 Construct Perimeter Channel X6 on Eastern Bund of Cell 2	50 02-Nov-19 21-Dec-19 249 53-1400: FS, 53-1500: FS 50 20-Feb-20 09-Apr-20 189 63-1000: FS, 53-3400: FS	53-3500: FS 53-3600: FS					
403 404 405	5.03.5 53-3600 Construct Perimeter Channel X6 Eastern Bund of Cell 3 5.03.5 53-3700 Culvert X6 (25m long) at Cell 1 Southern Bund 5.03.5 53-3800 Perimeter Channel (X9B) at Cell 1 Southern & Western Bund	50 09-Jun-20 28-Jul-20 129 63-1900: FS, 53-3500: FS 75 25-Jul-19 07-Oct-19 1314 53-1500: FS 45 25-Jul-19 07-Sep-19 1344 53-1500: FS, 53-1600: FS	53-3900: FS					
406	5.03.5 53-3900 Drop Inlet & Culvert (X9) - 21m long 5.03.5 53-4000 Sediment Trap (ST)	180 29-Jul-20 24-Jan-21 129 11-1100: FS, 23-1900: FS, 53-3600	2: FS	9.				
408	5.03.5 53-4100 Dual Culvert 74m long (connect to DP4)	180 29-Jul-20 24-Jan-21 129 11-1100: FS, 11-1200: FS, 23-1900						
409	SA2.5.03.6 Drainage - Ground Water 5.03.6 53-4200 Construct Groundwater Collection Pipe along Cells X1 & X2 Eastern Bund 5.03.6 53-4300 Construct Groundwater Collection Pipe along Cell X3 Eastern Bund	200 26-May-19 11-Dec-19 209 70 26-May-19 03-Aug-19 9 11-1100: FS, 23-1600: FS, 53-2900						
411 412 413	5.03.6 53-4300 Construct Groundwater Collection Pipe along Cell X3 Eastern Bund 5.03.6 53-4400 Construct Groundwater Collection Pipe along Intercell Bund X2/X3 5.03.6 53-4500 Construct Manhole MH-X1	50 04-Aug-19 22-Sep-19 159 53-4200: FS 50 23-Sep-19 11-Nov-19 209 53-4300: FS 30 12-Nov-19 11-Dec-19 209 53-4400: FS	53-4400: FS, 63-1900: FS 53-4500: FS, 63-1200: FS 52-2300: FS, M 9. 5: FS					
414 415 416	SA2.5.03.7 Utilities - Distribution within New Infrastructure Area 5.03.7 53-4600 Power Supply HV Works (Transformer & HV switchgear) 5.03.7 53-4700 Power Distribution, LV Power Supply Works	391 11-Aug-19 04-Sep-20 276 5 30-Jun-20 04-Jul-20 0 54-3000: FS 2 05-Jul-20 06-Jul-20 0 54-3100: FS , 12-1200: FS	12-1200: FS 12-1000: FS					
417	5.03.7 53-4800 Sewerage (Collection to LTP)	60 07-Jul-20 04-Sep-20 271 54-1000: FS, 54-3100: FS, 54-3300	: FS, 54-4100: FS 12-1100: FS, 53-6100: FS					
418 419 420	5.03.7 53-4900 Sewerage (Discharge to Site Boundary) 5.03.7 53-5000 Lighting Provision 5.03.7 53-5100 Fire Services	60 07-Jul-20 04-Sep-20 271 54-1000: FS, 54-4100: FS, 54-4600 30 07-Jul-20 05-Aug-20 6 54-1000: FS, 54-4100: FS, 54-4600 115 12-Mar-20 04-Jul-20 2 53-6800: FS						
421	5.03.7 53-5200 Water Supply (Fresh & Salt) 5.03.7 53-5300 Telecom & Network	115 12-Mar-20 04-Jul-20 338 53-6600: FS, 53-6700: FS 45 11-Aug-19 24-Sep-19 622 53-6400: FS	12-1100: FS 12-1100: FS					
423 424 425	5.03.7 53-5400 Gas Network (LFG to LTP) SA2.5.03.8 Utilities - Works Associated with Utilities Undertakers SA2.5.03.8.U1 CLP	15	54-2800: FS					
426	5.03.8.U1 53-5500 Excavate Trench for CLP Cable 5.03.8.U1 53-5600 Backfill Trench after CLP Cable Laying	100 13-May-19 20-Aug-19 194 23-2900: FS 30 01-May-20 30-May-20 43 53-5800: FS	53-5800: FS, 54-1000: SS, 54-4100: SS, 54-4600: SS, M10. 1: FS -60, M10. 2: FS -30, M10. 3: FS 54-1000: FF, 54-4100: FF, 54-4600: FF					
428	5.03.8.U1 53-5800 Backilli French after CLP Cable Laying 5.03.8.U1 53-5800 CLP Cable Laying (from CLP Substation to Site Boundary) 5.03.8.U1 53-5800 CLP Cable Laying (from Site Boundary to HV Switchroom)	200 27-Feb-19 14-Sep-19 229 32-2400: FS 60 02-Mar-20 30-Apr-20 0 53-5500: FS, 54-2900: FS, 32-2400	54-3000: FS					
430	5.03.8.U1 53-5900 CLP HV associated equipment installation SA2.5.03.8.U2 DSD	120 18-Dec-19 15-Apr-20 0 54-2900: FS, 32-2400: FS 147 05-Sep-20 29-Jan-21 129	53-5800: FF 15					
432 433 434	5.03.8.U2 53-6000 Connection to Storm Drain System 5.03.8.U2 53-6100 Connection to Foul Drain System SA2.5.03.8.U3 Telecom	5 25-Jan-21 29-Jan-21 129 53-4100: FS, 53-4000: FS, 53-3900 5 05-Sep-20 09-Sep-20 271 53-4800: FS, 53-4900: FS 100 13-May-19 20-Aug-19 327	: FS 32-1500: FS 32-1500: FS					
435	5.03.8.U3 53-6200 Excavate Trench for PCCW	60 13-May-19 11-Jul-19 307 23-2900: FS	53-6400: FS, 54-1000: SS, 54-4100: SS, 54-4600: SS, M10. 1: FS -40, M10. 2: FS -20, M10. 3: FS	0.				
436 437 438	5.03.8.U3 53-6300 Backfill Trench after PCCW Cable Laying 5.03.8.U3 53-6400 Laying Cables & Connection SA2.5.03.8.U4 WSD	10 11-Aug-19 20-Aug-19 327 53-6400: FS 30 12-Jul-19 10-Aug-19 327 53-6200: FS 304 13-May-19 11-Mar-20 338	54-1000: FF, 54-4100: FF, 54-4600: FF 53-5300: FS, 53-6300: FS					
439	5.03.8.U4 53-6500 Install Watermain & Piping for Water Supplies 5.03.8.U4 53-6600 Connection for Fresh Water & Meter Installation	60 13-May-19 11-Jul-19 216 23-2900: FS 30 11-Feb-20 11-Mar-20 338 53-6500: FS, 32-2300: FS	53-6600: FS, 53-6700: FS, 53-6800: FS, 53-6900: FS 53-5200: FS					
441 442 443	5.03.8.U4 53-6700 Connection for Salt Water 5.03.8.U4 53-6800 Connection for Fire Services	30 11-Feb-20 11-Mar-20 338 53-6500: FS, 32-2300: FS 30 11-Feb-20 11-Mar-20 2 53-6500: FS, 32-2300: FS	53-5200: FS 53-5100: FS					
444 445	5.03.8.U4 53-6900 Connection for Cooling Tower & Meter Installation SA2.5.03.8.U5 HyD Lighting 5.03.8.U5 53-7000 Installation of Public Street Lighting / Handover	30 11-Feb-20 11-Mar-20 117 53-6500: FS, 32-2300: FS 120 07-Jul-20 03-Nov-20 216 120 07-Jul-20 03-Nov-20 216 54-4100: FS, 54-4600: FS, 54-1000	54-2700: FS, 54-3900: FS : FS 32-1500: FS					
446 447 448	SA2.5.04 Building Construction, incl. E&M and System Installation, and T&C SA2.5.04.A Part X1 Area A 5.04.A General Area & Access Road	890 31-Dec-18 07-Jun-21 0 554 31-Dec-18 06-Jul-20 36 120 09-Mar-20 06-Jul-20 6 23-1300: FS, 53-5500: SS, 53-5600	: FF, 53-6200: SS, : FS, 54-1100: FF, : FS, 54-1100: FF, : FS, 54-100: FS, 53-5400: FS, 53-7000: FS, 68-1700: FS					
449	5.04.A 54-1100 Carpark & Supporting Area	54-1800: FF 60 31-Dec-18 28-Feb-19 64 23-1300: FS, 11-1100: FS	32-1500: FS, M 5.11: FS -30, M 5.12: FS, 54-1000: FF, 54-1800: FS					
450	5.04.A 54-1200 Diesel Fuel Tanks 5.04.A 54-1300 EPD Building	60 08-May-20 06-Jul-20 36 23-1300: FS, 23-5200: FS, 12-1000 270 30-Apr-19 24-Jan-20 44 23-1300: FS, 23-5200: FS, 11-1100	: FS, 54-1700: SS 60 32-2100: FS, M 5. 4: FS -135, M 5. 5: FS, 12-1000: FS,					
452	5.04.A 54-1400 Fire Service Tank 5.04.A 54-1500 GVL Building	270 29-Jun-19 24-Mar-20 44 23-1300: FS, 23-5200: FS, 11-1100						
454	5.04.A 54-1600 GVE Building 5.04.A 54-1600 Laboratory Building	270 28-Aug-19 23-May-20 44 23-1300: FS, 23-5200: FS, 11-1100	54-1700: SS 60					
455 456	5.04.A 54-1700 Maintenance Building & Area 5.04.A 54-1800 Storage Facility & Area	270 01-Mar-19 25-Nov-19 44 23-1300: FS, 23-5200: FS, 11-1100 60 01-Mar-19 29-Apr-19 64 23-1300: FS, 11-1100: FS, 54-1100	54-1300: SS 60 : FS 32-1500: FS, M 5.11: FS -30, M 5.12: FS, 54-1000: FF,					
457	5.04.A 54-1900 Waste Oil Tanks	90 08-Apr-20 06-Jul-20 36 23-1300: FS, 23-5200: FS, 12-1000						
459 460	5.04.A 54-2000 Water Service House SA2.5.04.B Part X1 Area B SA2.5.04.B.1 BioPlant Building	60 30-Apr-19 28-Jun-19 64 23-1300: FS, 23-5200: FS, 11-1100 890 31-Dec-18 07-Jun-21 0 330 17-Jan-19 12-Dec-19 243	: FS, 54-1800: FS 32-2100: FS, M 5.10: FS, 12-1000: FS, 54-4400: FS					
461	5.04.B.1 54-2100 LTP BioPlant Building SA2.5.04.B.2 Leachate Treatment Plant	330 17-Jan-19 12-Dec-19 243 23-1300: FS, 23-5200: FS, 23-3200 31-1000: FS 589 31-Dec-18 10-Aug-20 21						
463	5.04.B.2 54-2200 Main Plant Area included Civil works 5.04.B.2 54-2300 MEP Installation	274 31-Dec-18 30-Sep-19 0 23-1300: FS, 23-3200: FS, 11-1100 220 01-Oct-19 07-May-20 0 41-2100: FS, 41-1800: FS, 22-2100	SF 30, M 6. 4: FS -137, M 6. 5: FS					
464	5.04.B.2 54-2300 MEP Installation 5.04.B.2 54-2400 SBR Tanks 5.04.B.2 54-2500 Ammonia Stripper	220 01-Oct-19 07-May-20 0 41-2100: FS, 41-1800: FS, 22-2100 11-1100: FS 100 01-Oct-19 08-Jan-20 236 41-2400: FS, 54-2200: FS 315 01-Oct-19 10-Aug-20 21 41-3000: FS, 54-2200: FS	12-1000: FS 60, 32-1900: FS, 54-2600: FS, M 6. 8: FS -110 M 6. 9: FS, 32-2200: FS 54-2600: FS, M 6. 6: FS 54-2600: FS, M 6. 8: FS -150, M 6. 9: FS					
467	5.04.B.2 54-2500 Ammonia Stripper SA2.5.04.B.3 LTP - Test & Commission 5.04.B.3 54-2600 Dry testing	315 01-Oct-19 10-Aug-20 21 41-3000: FS, 54-2200: FS 301 11-Aug-20 07-Jun-21 0 45 11-Aug-20 24-Sep-20 21 54-2300: FS, 54-2400: FS, 54-2500						
469	5.04.B.3 54-2700 Wet testing 5.04.B.3 54-2800 Operational testing	75 25-Sep-20 08-Dec-20 21 54-2600: FS, 12-1200: FS, 53-6900 23-6800: FS 160 30-Dec-20 07-Jun-21 0 54-2700: FS, 53-2400: FS, 53-2500	: FS, 53-2100: FS, 32-1500: FS, M11. 3: FS, M11. 4: FS					
471	SA2.5.04.C Part X1 Area C	53-2200: FS, 63-1700: FS, 63-2600 54-4000: FS 730 31-Dec-18 29-Dec-20 0						
472	SA2.5.04.C.1 LFG - Power Supply Building 5.04.C.1 54-2900 LFG Building (with Transformer Room) 5.04.C.1 54-3000 Transformer & HV Swtichgear Installation	530 17-Jan-19 29-Jun-20 5 335 17-Jan-19 17-Dec-19 0 23-1300: FS, 23-3500: FS, 11-1100 60 01-May-20 29-Jun-20 0 54-2900: FS, 41-1200: FS, 53-5800	FS	. 6:				
475	5.04.C.1 54-3100 MEP Installation, with T&C	75 18-Dec-19 01-Mar-20 125 54-2900: FS	32-1400: FS, M 7. 4: FS -30, M 7. 5: FS, M 7. 5: FF 32-1400: FS, 32-2100: FS, 53-4700: FS, 53-4800: FS, M 7. 5: FS FS -30, M 7. 5: FS	. 4:				
476	SA2.5.04.C.2 LFG Treatment Plant 5.04.C.2 54-3200 Main Plant Area included Civil Works	554 31-Dec-18 06-Jul-20 0 384 31-Dec-18 18-Jan-20 0 23-3500: FS, 11-1100: FS	54-3300: FS, 54-3400: FS, 54-3500: FS, 54-3600: FS, 54-3700: FS, 54-3800: FS, M 7. 1: SF 30, M 7. 2: FS -200, N 7. 3: FS	M				
478	5.04.C.2 54-3300 MEP Installation 5.04.C.2 54-3400 GHS600 Blower 601 A&B Relocation	170 19-Jan-20 06-Jul-20 0 54-3200: FS, 12-1000: FF 15 19-Jan-20 02-Feb-20 155 23-5800: FS, 54-3200: FS	7. 3: FS 32-2000: FS, 53-4800: FS, 54-3900: FS, M 7. 4: FS -80, M 7 5: FS 54-3900: FS, M 7. 4: FS -8, M 7. 5: FS	7.		•		
480	5.04.C.2 54-3500 Pre-treatment 5.04.C.2 54-3600 Flares (incl. PLC control, interlink to Towngas PF & LTP)	60 19-Jan-20 18-Mar-20 110 41-3900: FS, 54-3200: FS 125 19-Jan-20 22-May-20 45 41-3300: FS, 54-3200: FS	54-3900: FS, M 7. 4: FS -30, M 7. 5: FS 54-3900: FS, M 7. 4: FS -60, M 7. 5: FS					
482	5.04.C.2 54-3700 LFG Engine (incl. on-grid protection, PLC control, turning) 5.04.C.2 54-3800 Cooling System	110 21-Feb-20 09-Jun-20 27 41-3600: FS, 54-3200: FS 45 19-Jan-20 03-Mar-20 125 22-1500: FS, 54-3200: FS	54-3900: FS, M 7. 4: FS -60 54-3900: FS, M 7. 4: FS -25, M 7. 5: FS					
484	SA2.5.04.C.3 LFG - Test & Commission 5.04.C.3 54-3900 MEP Testing	176 07-Jul-20 29-Dec-20 0 65 07-Jul-20 09-Sep-20 0 54-3400: FS, 54-3500: FS, 54-3600 54-3800: FS, 12-1200: FS, 53-6900 54-3300: FS		30,				
486	5.04.C.3 54-4000 Operational Testing	111 10-Sep-20 29-Dec-20 0 53-1300: FS, 63-2700: FS, 63-1800 53-1100: FS, 54-3900: FS, 23-7200						
487	SA2.5.04.D Part X1 Area D 5.04.D 54-4100 General Area & Access Road	374 29-Jun-19 06-Jul-20 6 120 09-Mar-20 06-Jul-20 6 23-1300: FS, 53-5500: SS, 53-5600 53-6300: FF, 12-1000: FF, 11-1100						
489	5.04.D 54-4200 VWF Building 5.04.D 54-4300 Weighbridge	120 28-Oct-19 24-Feb-20 63 23-1300: FS, 23-5200: FS, 41-4500 54-4300: SS 60 75 29-Aug-19 11-Nov-19 63 41-4200: FS, 23-1300: FS, 23-5200	FS, 54-4500: SS 60	00:				
491	5.04.D 54-4400 Weighmaster House	54-4400: SS 60 120 29-Jun-19 26-Oct-19 64 23-1300: FS, 23-5200: FS, 11-1100	: FS, 54-2000: FS 32-2100: FS, M 8. 1: FS, 12-1000: FS, 54-4300: SS 60					
492	5.04.D 54-4500 Wheel Wash Bath SA2.5.04.E Part X1 Area E & Part X2 5.04 F 54-4600 General Area & Access Road	75 27-Dec-19 10-Mar-20 63 23-1300: FS, 23-5200: FS, 41-4500 54-4200: SS 60 163 26-Jan-20 06-Jul-20 6 53-5500: SS 53-5600: FF 53-6200						
494	5.04.E 54-4600 General Area & Access Road 5.04.E 54-4700 Guard House & Entrance Gate	120 09-Mar-20 06-Jul-20 6 53-5500: SS, 53-5600: FF, 53-6200 12-1000: FF, 11-1100: FS, 11-1200 100 26-Jan-20 04-May-20 63 23-1300: FS, 23-5200: FS, 11-1100	FS			-		
496 497	SA2.5.08 Landscape Works - Advance Screen Planting in CWB Country Park SA2.5.08.N Area N	54-4500: SS 30 270 01-Apr-19 26-Dec-19 529 270 01-Apr-19 26-Dec-19 529						
498	5.08.N 58-1000 Advance Screen Planting 5.08.N 58-1100 Establishment of Screen Planting	90 01-Apr-19* 29-Jun-19 529 23-7900: FS, 31-1100: FS, 11-1500 270 01-Apr-19* 26-Dec-19 529 58-1000: SS, 14-1800: FS	: FS 14-1800: SS -60, 58-1100: SS, 68-1600: SS 30, M 3. 2: FS 32-1500: FS					
500 501 502	SA2.5.08.S Area S 5.08.S 58-1200 Advance Screen Planting 5.08.S 58-1300 Establishment of Screen Planting	270 01-Apr-19 26-Dec-19 529 90 01-Apr-19* 29-Jun-19 529 23-7900: FS, 31-1100: FS, 11-1500 270 01-Apr-19* 26-Dec-19 529 58-1200: SS	: FS 58-1300: SS, M 3. 2: FS 32-1500: FS					
503 504	SA2.6 Construction (Remaining Works) SA2.6.02 Advance Works	1474 01-Apr-19 13-Apr-23 30 80 09-Jul-21 26-Sep-21 339						
505	SA2.6.02.9 Demolition of SENT Infrastructure Area 6.02.9 62-1000 Existing SENT General Infrastructure Facility & Building	80 09-Jul-21 26-Sep-21 339 60 09-Jul-21 06-Sep-21 239 32-2100: FS, 12-1300: FS	23-2000: SS -90, 63-2800: FS, 63-2900: FS, 63-3000: FS, 63-4300: FS, M12. 4: FS -30, M12. 5: FS					
507	6.02.9 62-1100 Existing SENT LTP 6.02.9 62-1200 Existing SENT LFG	60 29-Jul-21 26-Sep-21 339 32-1500: FS, 12-1300: FS, 23-2200 60 29-Jul-21 26-Sep-21 339 32-1500: FS, 12-1300: FS, 23-2200						
	■ Remaining Work			Territories Land Fill Extension (SA2-SEN	TX)		Date Revision	one one of the order
_	 Critical Remaining Work Milestone 	Page: 3 of 4	Journ-Last 146W	Baseline Programme	,	GREEN VALLEY LANDFILL, LIMITED	11-May-18 SENTX-GVL-W-PB-ZZ-0001 Rev. I01 20-Jul-18 SENTX-GVL-W-PB-ZZ-0001 Rev. I02	
·								

#	DO Dath	-	ivity Activity Na	Nama		+ -	o#	Total Predecessor Details	Successor Details
#		ID			Dur			Float	Successor Details
509			E <mark>ngineering Wo</mark> dfill Cell 2	Vorks			19 13-Apr-23 19 23-Jan-2		
511			1000 Earth bund	nd (Eæstern)				9 11-1100: FS, 23-2500: FS, 53-4200: FS, 53-1400:	
								53-2800: FS	63-2000: FS, 63-2100: FS, 63-2200: FS, M12. 1: FS -50, M12. 2: FS, 63-1100: FS
512	6.02.2	62	1100 Earth bund	nd (Western)	110	20 Eab	20 09 Jun 20	84 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400:	S, 63-1400: FS, 63-1500: FS, 63-1700: FS, 63-3500: FS,
312	6.03.2	03	1100 Earth bund	na (western)	110	20-Feb	-20 06-Jun-20	63-1000: FS 63-1000: FS	63-3600: FS, 63-1200: FS, 63-1700: FS, 63-3500: FS,
513	6.03.2	63	1200 Intercell be	bund (Cell 2/3)	90	09-Jun	20 06-Sep-20	734 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: 53-4400: FS, 63-1100: FS	S, 63-1500: FS
514	6.03.2	63	1300 Site Forma	nation	75	02-Nov	19 15-Jan-20	14 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400:	63-1400: FS . 63-4200: FS
									·
515			1400 Pump Sta	<u> </u>				84 63-1300: FS, 63-1100: FS	63-1600: FS, 63-1700: FS
516	6.03.2	63	1500 Lining Wo	orks	90	01-Oct-	20* 29-Dec-20	710 41-1500: FS, 63-1000: FS, 63-1100: FS, 63-1200:	63-1600: FS, M12. 3: FS, 63-2400: FS
517	6.03.2	63	1600 Protective	re Stone Laying & Leachate Collection Pipe	25	30-Dec	20 23-Jan-2 ⁻	810 63-1500: FS, 41-1500: FS, 63-1400: FS	32-1600: FS, M12. 3: FS
518	6.03.2	63	1700 Install Lea	eachate Force Main	75	24-Ju	·20 06-Oct-20	84 63-1100: FS, 41-1500: FS, 63-1400: FS	54-2800: FS, M12. 3: FS
519	6.03.2	63	1800 Install Lan	andfill Gas Pipe on earth bund	35	20-Feb	20 25-Mar-20	168 41-1500: FS, 63-1000: FS	54-4000: FS, M12. 3: FS
520			dfill Cell 3				20 02-Feb-22		
521	6.03.3	63	1900 Earth bund	nd (Eastern)	110	20-Feb	·20 08-Jun-20	9 11-1100: FS, 53-4200: FS, 63-1000: FS, 53-4300: 53-2800: FS, 63-4200: FS	53-3300: FS, 53-3600: FS, 63-2400: FS, 63-2700: FS, M12. 1: FS -50, M12. 2: FS, 63-2000: FS -45, 63-2200: FS
								00 2000 1 2000 1	
522	6.03.3	63	2000 Earth bund	nd (Western)	110	25-Apr	20 12-Aug-20	19 11-1100: FS, 63-1000: FS, 63-1900: FS -45	63-2300: FS, 63-2400: FS, 63-2600: FS, 63-3700: FS, 63-2100: FS -45
523	6.03.3	63	2100 Intercell be	bund (Cell 3/4)	105	29-Jun	-20 11-Oct-20	789 11-1100: FS, 63-1000: FS, 63-4200: FS, 63-2000:	
	0.00.0	00	2100 Intercent	build (GCII 0/4)	100	25-0 011	20 11-00(-20	765 11-1100.10,00-1000.10,00-4200.10,00-2000.	0.72400.10
524			2200 Site Forma					9 11-1100: FS, 63-1000: FS, 63-1900: FS	63-2300: FS
525	6.03.3	63	2300 Pump Sta	ration (PS#3X)				9 63-2200: FS, 63-2000: FS	63-2500: FS, 63-2600: FS
526	6.03.3	63	2400 Lining Wo	forks	100	01-Oct-	21* 08-Jan-22	435 41-1500: FS, 63-1900: FS, 63-2000: FS, 63-2100: 63-1500: FS	S, 63-2500: FS, M12. 3: FS
527	6.03.3	63	2500 Protective	e Stone Laying & Leachate Collection Pipe	25	09-Jan	22 02-Feb-22	435 63-2400: FS, 41-1500: FS, 63-2300: FS	32-1700: FS, M12. 3: FS
528				eachate Force Main				9 63-2000: FS, 41-1500: FS, 63-2300: FS	53-2500: SS -90, 54-2800: FS, M12. 3: FS
529				andfill Gas Pipe on earth bund				58 41-1500: FS, 63-1900: FS	54-4000: FS, M12. 3: FS
530			dfill Cell 4		584	07-Sep	21 13-Apr-23	30	
531				ng Portion of Buttress Wall	120	07-Sep	21 04-Jan-22	494 62-1000: FS	
532	6.03.4	63	2900 Earth bund	nd (Western) incl. MSE Wall	120	07-Sep	21 04-Jan-22	239 62-1000: FS	63-3000: FS, 63-3100: FS, 63-3200: FS, 63-3400: FS, 63-3800: FS, 63-3900: FS, 63-4100: SS -90, M 9. 6: FS -60,
									M 9. 7: FS -30, M 9. 8: FS
500	0.00		2000 0:: -			05:	00 011	020 004000 50 004400 50 00400 50 00	02.2400.50
533	6.03.4	63	3000 Site Forma	nation	120	05-Jan	22 04-May-22	239 62-1000: FS, 62-1100: FS, 62-1200: FS, 63-2900: 63-4100: FS	SS, 63-3100: FS
534	6.03.4	63	3100 Pump Sta	ation (PS#4X)	45	05-May	22 18-Jun-22	239 63-3000: FS, 63-2900: FS	63-3300: FS, 63-3400: FS
535	6.03.4	63	3200 Lining Wo	orks	135	01-Oct-	22* 12-Feb-23	0 41-1500: FS, 63-2900: FS	63-3300: FS, M12. 6: FS
536	6.03.4	63	3300 Protective	re Stone Laying & Leachate Collection Pipe	60	13-Feb	23 13-Apr-23	0 41-1500: FS, 63-3200: FS, 63-3100: FS	12-1900: FS, 32-1800: FS, M12. 6: FS
537	6.03.4	63	3400 Install Lea	eachate Force Main & Remove Temporary Leachate Pipe	30	19-Jun	22 18-Jul-2	269 41-1500: FS, 63-2900: FS, 63-3100: FS	12-1900: FS, 32-1800: FS, M12. 6: FS
538			nage - Surface F				20 03-Feb-22		
539				er Channel (X9A) at Cell 2 Western Bund				1054 63-1100: FS	12-1900: FS
540				er Channel (X10A) at Cell 2 Western Bund				1029 63-1100: FS	63-4000: FS
541				er Channel (X10A) at Cell 3 Western Bund				964 63-2000: FS	63-4000: FS
542				er Channel (X10A) at Cell 4 Western Bund				464 63-2900: FS	63-4000: FS
543				er Channel (X10C) at Cell 4 Western Bund				469 63-2900: FS	63-4000: FS
544	6.03.5	63	4000 Connectio	ion to Existing DP3	10	25-Jan	22 03-Feb-22	464 63-3900: FS, 63-3600: FS, 63-3700: FS, 63-3800:	S 12-1900: FS
545	6.03.5	63	4100 Remove C	Cut-Off Channel C-7 at bottom of Buttress Wall	30	09-Jun	21 08-Jul-2	419 63-2900: SS -90	63-3000: FS
546				ary Channel (X7T) at SENT Infrastructure Area				14 63-1300: FS	63-1900: FS, 63-2100: FS
547	SA2.6.0	3.6 Drai	nage - Ground \	Water			21 30-Nov-2		
548				et Temporary Channel (TC-1), from MH-1 to Existing UC-825	50	07-Sep	21 26-Oct-2	529 23-1900: FS, 11-1300: FS, 62-1000: FS	63-4400: FS
549				W at MH-1 to TC-1				529 63-4300: FS	63-4500: FS, M 9. 9: FS
550				ection of GWCP across Cell 4				529 62-1100: FS, 62-1200: FS, 63-4400: FS	12-1900: FS
551	l —			ssociated with Utilities Undertakers			20 27-Jul-2		
553		03.8.U1 3.U1 63		nerator On-grid Testing			20 27-Jul-2 20 27-Jun-2	655 32-2500: FS, 12-1200: FS, 54-4000: FS	63-4700: FS
554				nerator On-grid Inspection & Verify				655 63-4600: FS	12-1900: FS
555			TownGas	<u> </u>			20 08-Jan-2		
556				as Mains (from LFG to Town Gas PF)				855 54-4000: FF	63-4900: FS
557	6.03.8	8.U6 63	4900 Gas Meter	er Relocation & Connection at LFG	10	30-Dec	20 08-Jan-2 ⁻	855 63-4800: FS, 54-4000: FS	12-1900: FS
558			ing & E&M Wor	orks			19 22-Jul-2		
559			X1 Area C LFG Treatment	t Plant			19 22-Jul-2 19 22-Jul-2		
561				Blower 601 C Relocation				660 32-1500: FS	12-1900: FS
562				on Chiller (Optional)				1231 54-2200: FS	12-1900: FS
563			scape Works	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \			19 03-Dec-20		
564	SA2.6.0	8.1 SEN	T Area - Tree Re	lemoval & Transplanting	240	01-Apr	19 26-Nov-19	1264	
565	6.08.1		1000 Access tre	rees condition and select for transplanting				1264 14-1300: FS	68-1100: FS, 68-1200: FS, 68-1400: FS
				new site to receive trees	90	01-May	19 29-Jul-1	1264 68-1000: FS	68-1200: SS
566		68							AA 1
566	6.08.1	68 68	1200 Transplan	nt selected trees	120			1264 68-1000: FS, 68-1100: SS	68-1300: FS
566 567 568	6.08.1 6.08.1	68 68 68	1200 Transplan	ees prior to removal from Cell 4	120 90	29-Aug	19 26-Nov-19	1264 68-1200: FS	12-1900: FS
566 567 568 569	6.08.1 6.08.1 6.08.1	68 68 68 68	1200 Transplan 1300 Prune tree 1400 Tree Fellin	ees prior to removal from Cell 4 ling - Part X3	120 90 90	29-Aug 01-May	19 26-Nov-19	1264 68-1200: FS 1384 23-8200: FS, 31-1600: FS, 68-1000: FS	
566 567 568 569 570	6.08.1 6.08.1 6.08.1 SA2.6.0	68 68 68 68 88.2 SEN	1200 Transplan 1300 Prune tree 1400 Tree Fellir TX Area - Trial N	ees prior to removal from Cell 4 ling - Part X3 Nursery & Tree Planting	90 90 583	29-Aug 01-May 01-May	19 26-Nov-19 19 29-Jul-19 19 03-Dec-20	1264 68-1200: FS 1384 23-8200: FS, 31-1600: FS, 68-1000: FS 891	12-1900: FS 12-1900: FS
566 567 568 569 570 571	6.08.1 6.08.1 6.08.1 SA2.6.0 6.08.2	68 68 68 68 8.2 SEN 68	1200 Transplan 1300 Prune tree 1400 Tree Fellir TX Area - Trial N 1600 Trial Nurse	ees prior to removal from Cell 4 ling - Part X3 Nursery & Tree Planting	90 90 90 583 300	29-Aug 01-May 01-May 01-May	19 26-Nov-19 19 29-Jul-19 19 03-Dec-20 19 24-Feb-20	1264 68-1200: FS 1384 23-8200: FS, 31-1600: FS, 68-1000: FS	12-1900: FS

Annex B

Environmental Mitigation Implementation Schedule

Annex B Environmental Mitigation Implementation Schedule

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
Air Quali	ty - Cons	truction Phase						
4.8.1	AQ1	 Blasting The area within 30m of the blasting area will be wetted prior to blasting. 	To minimise potential dust nuisance	Blasting area and 30m of blasting area	SENTX Contractor	✓	Air Pollution Control (Construction Dust) Regulations	Not applicable. Blasting is not required in the latest landfill design
		 Blasting will not be carried out when the strong wind signal or tropical cyclone warning signal No. 3 or higher is hoisted, unless this is with the express prior permission of the Commissioner of Mines. 						
		 loose material and stones in the Site will be removed prior to the blast operation 						
		 During blasting, blast nets, screens and other protective covers will be used to prevent the projection of flying fragments and material resulting from blasting 						
4.8.1	AQ2	 Rock Drilling Watering will be carried out at the rock drilling activities to avoid fugitive dust emissions. 	To minimise potential dust nuisance	Rock drilling area	SENTX Contractor	✓	Air Pollution Control (Construction Dust) Regulations	Not applicable. Rock drilling is not required in the latest landfill design
(1) D=Desig	gn; C=Const	ruction; O/R=Operation/Restoration; A=Aftercare						

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?		implemer ure? ⁽¹⁾ O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
4.8.1	AQ3	 Site Access Road The main haul road will be kept clear of dusty materials or sprayed with water. The main haul road will be paved with aggregate or gravel. Vehicle speed will be limited to 10kph. 	To minimise potential dust nuisance	Main haul road	SENTX Contractor	~		Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	Implemented
4.8.1	AQ4	Stockpiling of Dusty Materials • Any stockpile of dusty materials will be covered entirely by impervious sheeting or placed in an area sheltered on the top and three sides or sprayed with water so as to ensure that the entire surface is wet.	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓		Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	Implemented
4.8.1	AQ5	 Loading, unloading or transfer of dusty materials All dusty materials will be sprayed with water immediately prior to any loading, unloading or transfer operation so as to maintain the dusty material wet. 	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓		Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	Implemented
4.8.1	AQ6	 Site Boundary and Entrance Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of height not less than 2.4m from 	To minimise potential dust nuisance	Site boundary and entrance	SENTX Contractor	✓		Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO-	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the n		implen ure? ⁽¹⁾ O/R		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		ground level will be provided along the entire length of that portion of the site boundary except for the site entrance or exit.								TM Annex 4	
4.8.1	AQ7	Excavation Works			SENTX		✓			Air Pollution Control	Not applicable
		 Working area of any excavation or earth moving operation will be sprayed with water immediately before, during and immediately after the operation so as to ensure that the entire surface is wet. 		construction works area	Contractor					(Construction Dust) Regulations HKAQO and EIAO-	•
										TM Annex 4	
4.8.1	AQ8	Building Demolition	To minimise potential dust nuisance	All construction works area	SENTX Contractor	•	✓			Air Pollution Control (Construction Dust) Regulations	Not applicable
		• The area where the demolition works are planned to take place will be									
		sprayed with water immediately prior to, during and immediately after the demolition activities.								HKAQO and EIAO- TM Annex 4	
		 Any dusty materials remaining after a stockpile is removed will be wetted with water and cleared from the surface of roads or street. 									
4.8.1	AQ9	Construction of the Superstructure of Building	dust nuisance ffective dust screens, sheeting or etting will be provided to enclose he scaffolding from the ground level p to the highest level of the	All construction	SENTX Contractor		✓			Air Pollution Control (Construction Dust)	Implemented
		Effective dust screens, sheeting or		works area						Regulations	
		netting will be provided to enclose the scaffolding from the ground level up to the highest level of the scaffolding.								HKAQO and EIAO- TM Annex 4	

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?		imple: ure? ⁽¹⁾ O/R		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
4.8.1	AQ10	Should a stone crushing plant be needed on site, the control measures recommended in the Best Practicable Means Requirement for Mineral Works (Stone Crushing Plants) BPM 11/1 should be implemented.	To minimise potential dust nuisance	Stone crushing plant/ construction phase	SENTX Contractor	✓			Best Practicable Means Requirement for Mineral Works (Stone Crushing Plants) BPM 11/1	Not applicable. Stone crushing plant is not required in the latest landfill design
4.8.1	AQ11	Good site practices such as regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions.	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓			HKAQO and EIAO- TM Annex 4	Implemented
4.10.1	AQ12	Dust monitoring once every 6 days	Ensure the dust generated from the project meets the air quality requirement	At monitoring locations shown in <i>Figure 3.2a</i>	SENTX Contractor	✓			HKAQO and EIAO- TM Annex 4	Implemented
4.10.2	AQ41	Monitoring of ambient TSP once every 6 days	Ensure the dust emission from the project meets the dust requirement	At monitoring locations shown in Figure 11.3a	SENTX Contractor	✓	✓		HKAQO and EIAO- TM Annex 4	Implemented
4.10.2	AQ46	Monitoring of meteorological station, continuously	Collect site specific meteorological data	At meteorologica l station shown in Figure 11.3a	SENTX Contractor	✓	✓	✓	-	Implemented

EIA Ref.	EM&A Ref	A Environmental Protection Measures/ Mitigation Measures	Objectives of the Location of Recommended the Measures Measure & Main Concerns to address	Who to implement	the	meas	imples sure? (1)		What requirements or standards for the	Implementation Status and Remarks	
					the measure?	D	С	O/R	A	measure to achieve?	
5.7.1	N1	Adopt good site practice listed below:	To minimise potential construction noise	All construction	SENTX Contractor		✓			Noise Control Ordinance (NCO) and	Implemented
		 Only well-maintained plant will be operated on-site and plant should be serviced regularly during the construction program; 		works area						EIAO-TM Annex 5	
		Silencers or mufflers on construction equipment should be utilized and will be properly maintained during the construction program;									
		• Mobile plant, if any, will be sited as far from NSRs as possible;									
		Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or should be throttled down to a minimum;									
		Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and									
		Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities.									

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			implement sure? (1)	What requirements or standards for the	Implementation Status and Remarks
	1101	Managarion Measures	Measure & Main Concerns to address	11201 3 1120 3	the measure?	D	С	O/R A	measure to achieve?	
5.8	N2	Weekly noise monitoring	Ensure noise generated from the project meets the criteria	At monitoring locations shown in Figure 6.4a	SENTX Contractor		✓		Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented
Water Qua	ality - Co	nstruction Phase								
6.8.1	WQ1	Construction Runoff								
		• Exposed soil areas will be minimised	To minimise potential		SENTX Contractor		✓		ProPECC PN 1/94	Implemented
		to reduce the contamination of runoff and erosion.	1 , 1	construction works area					EIAO-TM Annex 6	
6.8.1	WQ2	• Perimeter channels will be	To minimise potential		SENTX	✓	✓		ProPECC PN 1/94	Reminder was given to
		constructed in advance of site formation works and earthworks and intercepting channels will be provided	water quality impacts arising from the construction works	construction works area	Contractor				Water Pollution Control Ordinance (WPCO)	the Contractor
		for example along the edge of excavation.							EIAO-TM Annex 6	
6.8.1	WQ3	Silt removal facilities, channels and	To minimise potential water quality impacts arising from the		SENTX Contractor		✓		ProPECC PN 1/94	Deficiency of
		manholes will be maintained and the deposited silt and grit should be							WPCO	mitigation measures but rectified by the
		removed regularly to ensure they are functioning properly at all times.	construction works						EIAO-TM Annex 6	Contractor
6.8.1	WQ4	Temporary covers such as tarpaulin	To minimise potential		SENTX		✓		ProPECC PN 1/94	Implemented
		will also be provided to minimise the generation of high SS runoff.	water quality impacts arising from the construction works	construction works area	Contractor				WPCO	
6.8.1	WQ5	The surface runoff contained any oil	To minimise potential	All	SENTX		✓		ProPECC PN 1/94	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			impleme ure? ⁽¹⁾		What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	C	O/R	A 1	measure to achieve?	
		and grease will pass through the oil interceptors.	water quality impacts arising from the	construction works area	Contractor				1	WPCO	
		merceptors.	construction works	works area					i	EIAO-TM Annex 6	
6.8.1	WQ6	• All sewer and drains will be sealed to	To minimise potential	Infrastructure			✓		i	ProPECC PN 1/94	Implemented
		prevent building debris, soil etc from entering public sewers/drains before	water quality impacts arising from the	area at existing SENT	Contractor				1	WPCO	
		commencing any demolition works	demolition works	Landfill					Ì	EIAO-TM Annex 6	
6.8.1	WQ7	During the excavation works for the	To minimise potential	Tunnel boring			✓		i	ProPECC PN 1/94	Not applicable.
		twin drainage tunnels, the recycle water for cooling the cutter head of	water quality impacts arising from the	sites	Contractor				1	WPCO	Excavation of drainage tunnels is not required
		the TBM will be conveyed to the sedimentation tanks for treatment and most of the treated water will be reused, where applicable and as much as possible, in the boring operations.	tunnel works						j	EIAO-TM Annex 6	in the latest landfill design.
6.8.1	WQ8	• The fuel and waste lubricant oil from	To minimise potential	SENTX Site	SENTX		✓		j	ProPECC PN 1/94	Implemented
		the on-site maintenance of machinery and equipment will be collected by a	water quality impacts arising from improper		Contractor				1	WPCO	
		licensed chemical waste collector.	handling of fuel and oil							Waste Disposal Ordinance (WDO)	
6.8.1	WQ9	Implementation of excavation	To minimise	All	SENTX		✓		j	ProPECC PN 1/94	Implemented
		schedules, lining and covering of excavated stockpiles	contaminated stormwater run-off	construction works	Contractor				1	WPCO	
		excavated stockpiles	from the SENTX Site						j	EIAO-TM Annex 6	
6.13	WQ10	0 1 2	To minimise potential	SENTX Site	SENTX		✓		1	WPCO	Implemented
		will be conducted on a regular basis as stated in the EM&A Manual.	water quality impacts on surface water arising from the construction works		Contractor				1	Water-TM	

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?		he measure? (1)		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
6.8.2	WQ11	Sewage Effluents	Concerns to address							
		Sufficient chemical toilets will be provided for the construction workforce.	To minimise potential water quality impacts arising from the sewage effluents	SENTX Site	SENTX Contractor		✓		WPCO	Implemented
6.8.2	WQ12	• Untreated sewage will not be allowed	To minimise potential	SENTX Site	SENTX		✓		WPCO	Reminder was given to
		to discharge into the surrounding water body.	water quality impacts arising from the sewage effluents		Contractor				WDO	the Contractor
6.8.2	WQ13	A licensed waste collector will be	To minimise potential	SENTX Site	SENTX		✓		WPCO	Implemented
		employed to clean the chemical toilets on a regular basis.	water quality impacts arising from the sewage effluents		Contractor				WDO	
Waste Ma	nagement	- Construction Phase								
7.6.1	WM1	All the necessary waste disposal permits are obtained prior to the commencement of construction work.	To ensure compliance with relevant statutory requirements	Before construction works commence	SENTX Contractor	✓	✓		WDO	Implemented
7.6.1	WM2	Management of Waste Disposal								
		The construction contractor will open a	To ensure that	SENTX Site	SENTX		✓		WDO	Implemented
		billing account with the EPD. Every construction waste or public fill load to be transferred to the Government waste disposal facilities such as public fill reception facilities, sorting facilities,	adverse environmental impacts are prevented		Contractor				Waste Disposal (Charges for Disposal of Construction Waste) Regulation;	
		landfills will required a valid "chit" which contains the information of the account holder to facilitate waste							Works Bureau Technical Circular No.31/2004; and	

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?		o implement asure? ⁽¹⁾ O/R A	What requirements or standards for the measure to achieve?	
		transaction recording and billing to the waste producer. A trip-ticket system will also be established to monitor the disposal of construction waste at the SENT Landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the contractor.						Annex 5 and Annex 6 of Appendix G of ETWBTC No. 19/2005)	
		A recording system for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established.							
7.6.1	WM3	Measures for the Reduction of Construction Waste Generation							
		Inert and non-inert construction waste will be segregated and stored in different containers or skips to facilitate reuse or recycling of the inert waste and proper disposal of the non-inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.	To reduce construction waste generation	SENTX Site	SENTX Contractor	✓		WDO EIAO-TM Annex 7	Deficiency of mitigation measures but rectified by the Contractor
7.6.1	WM4	Chemical Waste The construction contractor will register as a chemical waste producer with the EPD. Chemical waste will be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of	To ensure proper handling of chemical waste	SENTX Site	SENTX Contractor	✓		WDO Code of Practice on the Packaging, Handling and Storage of Chemical Wastes	Reminder was given to the Contractor

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		Chemical Wastes.						
7.6.1	WM5	Sewage An adequate number of portable toilets will be provided at the site to ensure that sewage from site staff is properly collected. The portable toilets will be desludged and maintained regularly by a specialist contractor.	To ensure proper handling of sewage	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Implemented
7.6.1 and SENTX latest design	WM6	General Refuse General refuse will be stored in enclosed bins separately from construction and chemical wastes. The general refuse will be delivered to a transfer station or other landfill, separately from construction and chemical wastes, on a daily basis to reduce odour, pest and litter impacts.	To ensure proper handling of general refuse	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Deficiency of mitigation measures but rectified by the Contractor
7.6.1	WM7	Recycling bins will be provided at strategic locations to facilitate recovery of aluminium can and waste paper from the SENTX Site. Materials recovered will be sold for recycling. Staff Training At the commencement of the construction works, training will be provided to workers on the concepts of site cleanliness and on appropriate waste management procedures, including	To ensure that adverse environmental	SENTX Site	SENTX Contractor	√		Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?			What requirements or standards for the measure to achieve?	Implementation Status and Remarks	
		waste reduction, reuse and recycling.								
7.8	WM8	Environmental Monitoring & Audit Requirements Weekly audits of the waste management practices will be carried out during the construction phase. The audits examine all aspects of waste management including waste generation, storage, recycling, transport and disposal.	To ensure that adverse environmental impacts are prevented	SENTX Site	SENTX Contractor	~	/		WDO	Implemented
Landfill G	as Hazar	ds - Design and Construction Phase								
8.6.2 and SENTX latest design	LFG1	Precautionary measures to be adopted by the contractors at the Project site and the adjacent development site within the landfill consultation zone are outlined in Paragraphs 8.3 to 8.49 of EPD's Landfill Gas Hazard Assessment Guidance Notes (the Guidance Note). Those precautionary measures applicable to the SENTX will be confirmed in the detailed Qualitative Landfill Gas Hazard Assessment to be submitted by the contractor.		All construction works area	SENTX Contractor	٧			Paragraphs 8.3 to 8.49 of EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7	Implemented
8.6.2	LFG2	Monitoring will be undertaken when construction works are carried out in confined space within the consultation zone with reference to the monitoring requirements and procedures specified in Paragraphs 8.23 to 8.28 of EPD's <i>Guidance Note</i> will be followed.	To protect workers from landfill gas risk	Confined space within the construction works area	SENTX Contractor	•				Not applicable

EIA Ref.	EM&A Ref	Mitigation Measures	Recommended tl	the Measures i	res implement			imple: sure? (1)		What requirements or standards for the		
		C .	Measure & Main Concerns to address		the measure?		С	O/R		measure to achieve?		
		In the event of the trigger levels being exceeded, it is recommended that a person, such as the Safety Officer, is nominated, with deputies, to be responsible for dealing with any emergency which may occur due to landfill gas. In an emergency situation, the nominated person, or his deputies, shall have the necessary authority and shall ensure that the confined space is evacuated and the necessary works implemented for reducing the concentrations of gas. The appropriate organisations shall be contact.										
8.6.3	LFG4	Implementation of engineering measures according to Contract Specification requirements. These measures will include the placement of liner and installation of landfill gas management system to contain, manage and control landfill gas.	To protect workers from landfill gas risk	SENTX Site	SENTX Contractor	✓	✓	✓	✓	EIAO-TM Annex 7	Implemented	
8.6.3	LFG5	Engineering measures to significant engineering measures will be required in the design of the SENTX to protect the staff working in the infrastructure area. These measures include a combination of passive and active systems (examples are recommended in EPD's <i>Guidance Notes</i>). Landfill gas monitoring boreholes will be installed at the edge of the waste slope	· ·	Infrastructure Area	SENTX Contractor	✓	√			EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7	Not applicable	

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	the Measures	Who to implement		o implement asure? ⁽¹⁾	What requirements or standards for the	Implementation Status and Remarks
	KCI	Willigation Weasures	Measure & Main Concerns to address	the weasures	the measure?	D C		measure to achieve?	Status and Remarks
		between the waste and the new infrastructure area to monitor the migration of landfill gas, if any.							
Ecology -	Construct	tion Phase							
9.10.2	EC1	Measures to control construction runoff:	To minimise potential		SENTX	✓		EIAO-TM Annex 16	Implemented
		• Exposed soil areas will be	water quality impacts affecting ecological	construction works area	Contractor			ProPECC PN 1/94	
		minimised to reduce the contamination of runoff and erosion;	resources					Water Pollution Control Ordinance (WPCO)	
								EIAO-TM Annex 6	
		 To prevent stormwater runoff from washing across exposed soil surfaces, perimeter channels will be constructed in advance of site formation works and earthworks and intercepting channels will be provided for example along the edge of excavation; 							Reminder was given to the Contractor
		 Silt removal facilities, channels and manholes will be maintained and the deposited silt and grit will be removed regularly to ensure they are functioning properly at all times; 						-	Deficiency of mitigation measures but rectified by the Contractor
		 Temporary covers such as tarpaulin will also be provided to minimise the generation of high suspended solids runoff; 						-	Implemented

		Recommended the Measures imple		<u>=</u>				What requirements	Implementation Status and Remarks	
KCI	Miligation Measures	Measure & Main Concerns to address	the weasures	_					measure to achieve?	Status and Remarks
	 The surface runoff contained any oil and grease will pass through the oil interceptors; and, 								-	Not applicable
	 Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. 								-	Implemented
EC2	Good Construction Practice:									
	 Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. 	To minimise potential ecological impacts arising from the Project	SENTX Site	SENTX Contractor		√			EIAO-TM Annex 16	Implemented
	 The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. 									
EC9	Environmental Monitoring & Audit Requirements									
	The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring and audit procedures during the	adverse ecological	SENTX	SENTX Contractor		√	✓	√	EIAO-TM Annex 16	Implemented
	Ref EC2	The surface runoff contained any oil and grease will pass through the oil interceptors; and, Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring	Ref Mitigation Measures Procedure & Main Concerns to address The surface runoff contained any oil and grease will pass through the oil interceptors; and, Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring	Ref Mitigation Measures Recommended Measure & Main Concerns to address * The surface runoff contained any oil and grease will pass through the oil interceptors; and, * Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: * Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. * The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring	Recommended Measures Econocerns to address implement the measure? The surface runoff contained any oil and grease will pass through the oil interceptors; and, Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. EC2 Good Construction Practice: Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. EC9 Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring and covering of excavation schedules, lining and covering of excavation schedules, lining and covering of excavation schedules, lining and covering of excavated stockpiles will be implementated to minimise potential ecological impacts arising from the Project To ensure that adverse ecological impacts are prevented and verse ecological impacts are prevented and everse ecologi	Recommended Measures implement the measure? * The surface runoff contained any oil and grease will pass through the oil interceptors; and, * Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. **ECZ*** Second Construction Practice:** * Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. * The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. **ECZ*** Environmental Monitoring & Audit Requirements **The implementation of the ecological mitigation measures should be checked implementated monitoring as part of the environmental monitoring in pacts are prevented and that damage as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts are prevented as part of the environmental monitoring impacts ar	Recommended Measure & Main Concerns to address * The surface runoff contained any oil and grease will pass through the oil interceptors; and, * Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site. **Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas. **The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas. **ECS***EDITION TO minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise potential ecological impacts arising from the Project** **To minimise pot	Recommended Measures implement the measure? In	Recommended Measures Main Concerns to address the Measure inhemeasure? #0	Recommended Measures Main Concerns to address **Inferum** In Surface runoff contained any oil and grease will pass through the oil interceptors; and, oil and grease will pass through the oil interceptors; and oil and grease will pass through the oil interceptors; and oil and grease will be a cological an

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?			implement sure? ⁽¹⁾ O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		construction period.								
Landscape	e and Visu	aal - Construction Phase								
10.6.5	LV1	CM1 - The construction area and area allowed for the contractor's office, leachate treatment plant and laboratory areas will be minimised to a practical minimum, to avoid impacts on adjacent landscape.	To minimise the landscape and visual impacts	SENTX Site	SENTX Contractor		✓		EIAO-TM Annex 18 and ETWBC 3/2006	Implemented
10.6.5	LV2	CM2 - Topsoil, where identified, will be stripped and stored for re-use in the construction of the soft landscape works, where practical. The Contract Specification will include storage and reuse of topsoil as appropriate.	To minimise the landscape and visual impacts	All construction works area	SENTX Contractor		✓		EIAO-TM Annex 18	Not applicable
10.6.5	LV3	CM3 - All existing trees at the edges of the landfill will be carefully protected during construction. Detailed Tree Protection Specification will be provided in the Contract Specification. Under this Specification, the Contractor will be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in Contractor's works areas.	To minimise the landscape and visual impacts	Potential impacted area	SENTX Contractor		✓		EIAO-TM Annex 18 and ETWBC 3/2006	Implemented
10.6.5	LV4	CM4 - Trees unavoidably affected by the works will be transplanted, where necessary and practical. A detailed Tree	landscape and visual	Potential impacted area	SENTX Contractor	✓	✓		EIAO-TM Annex 18 and ETWBC 3/2006	Not applicable

EIA Ref.	EM&A Ref	Mitigation Measures	Objectives of the Recommended	Location of the Measures			meas	implement sure? (1)	What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R A	measure to achieve?	
		Transplanting Specification will be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods will be allowed in the project programme.								
10.6.5 and SENTX latest design	LV5	CM5 - Within 3 months of taking possession of the SENTX Site, the Contractor will plant advance screen planting of native species at Light Standard size at 1.5m centres along the High Junk Peak Trail so as to screen views of the Works from the trail. Tree planting locations will be agreed with AFCD. Works will be completed within 9 months of taking possession of the SENTX Site.	To minimise the landscape and visual impacts	At High Junk Peak Hiking Trail	SENTX Contractor		✓		EIAO-TM Annex 18	Implemented
10.6.5	LV6	CM6 - The Contractor's office, leachate treatment plant and laboratory will be given an aesthetic treatment in earth tones to reduce their visual impact and albedo and blend them into the surrounding landscape.	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	✓	√		EIAO-TM Annex 18	Implemented
10.6.5	LV7	CM7 - The Contractor's office, leachate treatment plant and laboratory will be surrounded by a minimum of 5m wide and 0.75m high earth bund on the west and south sides planted with a dense screen of tree and shrub vegetation. Additional tree planting will be provided in unused spaces with thin infrastructure	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	✓	√		EIAO-TM Annex 18 and ETWBC 7/2002	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			implement sure? (1)	What requirements or standards for the	Status and Remarks
			Measure & Main Concerns to address		the measure?	D	C	O/R A	measure to achieve?	
		site, along access roads and in and around car parks. This will be supplemented with shrub planting, where appropriate.								
10.6.5	LV8	CM8 - Planting trials will be carried out in an on-site nursery prior to implementation of the first phase of restoration to establish the best planting matrix and management intensity of the recommended plant materials for the restoration.	To minimise the landscape and visual impacts	SENTX Site	SENTX Contractor		✓		EIAO-TM Annex 18	Implemented
11.4.1 and SENTX latest design	LV9	During the preparation of the detailed landscape design plan, the design submission will be audited against the recommendation proposed in the <i>ER Report</i> by the Registered Landscape Architect from the ET.	To ensure the implementation of mitigation measures proposed in this EIA Report	SENTX Site	SENTX Contractor/E T	✓	✓		EIAO-TM Annex 18	Implemented

Annex C

Monitoring Schedule for This Reporting Period

South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

March 2020

Sun	Mon	Tue	Wed	Thu	Fri	Sat
1	2	3	4	5	6	7
				Dust Monitoring		
				Surface Water Monitoring (pm)		
				Noise Monitoring (pm)		
8	9	10	11	12	13	14
			Dust Monitoring	Surface Water Monitoring (pm)		
				Noise Monitoring (pm)		
15	16	17	18	19	20	21
		Dust Monitoring	Surface Water Monitoring (pm)			
			Noise Monitoring (pm)			
22	23	24	25	26	27	28
	Dust Monitoring			Surface Water Monitoring (pm)		
				Noise Monitoring (pm)		
29	30	31				
Dust Monitoring						

Note

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

Air Quality

Calibration Certificates for Dust Monitoring Equipment



東業德勤測試顧問有限公司 ETS-TESTCONSULT LTD.

8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

Calibration Report of

High Volume Air Sampler

Manufacturer

Graseby 105

Date of Calibration

17 February 2020

Serial No.

9795 (ET/EA/003/18)

Calibration Due Date

16 April 2020

Method


Five-point calibration by using standard calibration kit Tisch TE-5025A refer to the

Operations Manual

Results

Flow recorder rea	48	44	37	30	27	
Qstd (Actual flow	1.74	1.56	1.26	1.07	0.84	
Pressure :	771.06 mm Hg		Temp.:	285	K	

Sampler 9795 Calibration Curve Site: Tseung Kwan O 137 (TKO-A1)

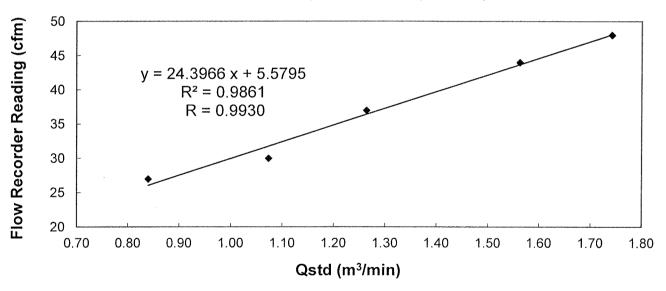

Acceptance Criteria: Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / does not comply* with the specified requirements and is deemed acceptable*/ unacceptable* for use.

Calibrated by:

LIAO, Yun Chao (Technician)

Checked by

LAU, Chi Leung

(Environmental Team Leader)

- END OF REPORT -



東業德勤測試顧問有限公司 ETS-TESTCONSULT LTD.

8/F Block B, Veristrong Industrial Centre, 34-36 Au Pui Wan Street, Fo Tan, Hong Kong

T: +852 2695 8318 F: +852 2695 3944 E: etl@ets-testconsult.com W: www.ets-testconsult.com

Calibration Report

of

High Volume Air Sampler

Manufacturer

Andersen G1051

Date of Calibration

17 February 2020

Serial No.

1176 (ET/EA/003/05)

Calibration Due Date

16 April 2020

Method


Based on Operations Manual for the 5-point calibration using standard calibration kit

manufactured by Tisch TE-5025 A

Results

Flow recorder read	54	48	45	32	26	
Qstd (Actual flow ra	ate, m³/min)	1.78	1.59	1.43	1.06	0.84
Pressure :	771.06 mm Hg		Temp.:	285	K	

Sampler 1176 Calibration Curve Site: Tseung Kwan O 137 (TKO-A2a)

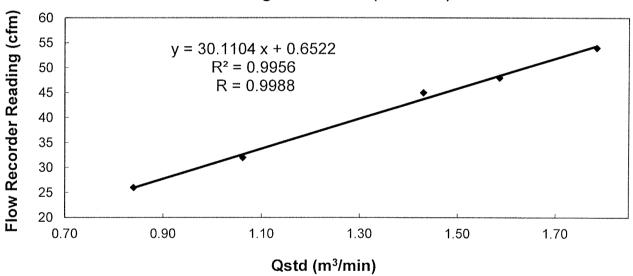

Acceptance Criteria: Correlation coefficient (r) of the calibration curve greater than 0.990 after a 5-point calibration

The high volume sampler complies* / does not comply* with the specified requirements and is deemed acceptable* / unacceptable * for use.

Calibrated by

LIAO, Yun Chao

(Technician)

Checked by

LAU, Chi Leung

(Environmental Team Leader)

- END OF REPORT -

24-hour TSP Monitoring Results

Table D2.1 24-hour TSP Monitoring Results at DM1

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (μg/m3)
5 Mar 20	8:30	6 Mar 20	8:30	Cloudy	94
11 Mar 20	9:25	12 Mar 20	9:25	Cloudy	105
17 Mar 20	8:00	18 Mar 20	8:00	Rainy	91
23 Mar 20	11:09	24 Mar 20	11:09	Fine	113
29 Mar 20	8:00	30 Mar 20	8:00	Rainy	107
				Average	102
				Min	91
				Max	113

Note:

DM1 corresponds to the existing TSP monitoring station TKO-A1 currently operating by CEDD.

Figure D2.1 Graphical Presentation for 24-hr TSP Monitoring at DM1

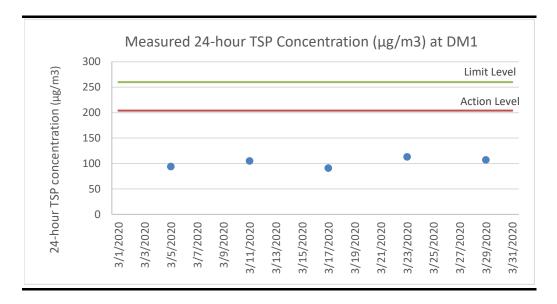



Table D2.2 24-hour TSP Monitoring Results at DM2

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (μg/m3)
5 Mar 20	8:30	6 Mar 20	8:30	Cloudy	88
11 Mar 20	9:35	12 Mar 20	9:35	Cloudy	94
17 Mar 20	8:00	18 Mar 20	8:00	Rainy	85
23 Mar 20	11:15	24 Mar 20	11:15	Fine	90
29 Mar 20	8:00	30 Mar 20	8:00	Rainy	93
				Average	90
				Min	85
				Max	94

Note:

DM2 corresponds to the existing TSP monitoring station TKO-A2a currently operating by CEDD.

Figure D2.2 Graphical Presentation for 24-hr TSP Monitoring at DM2

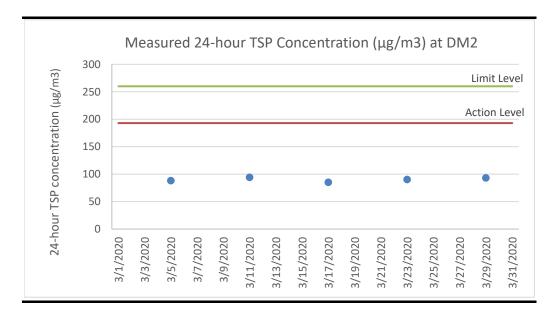

Event and Action Plan for Dust Monitoring

Annex D3 Event and Action Plan for Dust Monitoring During Construction Phase

		Action	
Event	ET	IEC	Contractor
Action Level			
Exceedance for one sample	 Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Repeat measurement to confirm finding if exceedance is due to the Project Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below action level 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods 	 Rectify any unacceptable practice Amend working methods if appropriate
Exceedance for two or more consecutive samples	 Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented If exceedance continues, arrange meeting with Contractor & IEC Continue monitoring at daily intervals if exceedance is due to the Project If no exceedance for 3 consecutive days, cease additional monitoring 	Check monitoring data submitted by ET	 Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate


		Action	
Event	ET	IEC	Contractor
Limit Level			
Exceedance for one sample	 Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Repeat measurement to confirm finding if exceedance is due to the Project Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below limit level 	Check monitoring data submitted by ETCheck Contractor's working methods	 Take immediate action to avoid further exceedance Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate
Exceedance for two or more consecutive samples	 Identify source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD the causes & actions taken for the exceedances Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Continue monitoring at daily intervals if exceedance is due to the Project If no exceedance for 3 consecutive days, cease additional monitoring If exceedance due to the Project continues, consider what portion of the work is responsible and stop that portion of work until the exceedance is abated 		 Take immediate action to avoid further exceedance Submit proposals for remedial measures to IEC Implement the agreed proposals Resubmit proposals if problem still not under control


ENVIRONMENTAL RESOURCES MANAGEMENT


GREEN VALLEY LANDFILL LTD.


Meteorological Data


Annex D4 Meteorological Data

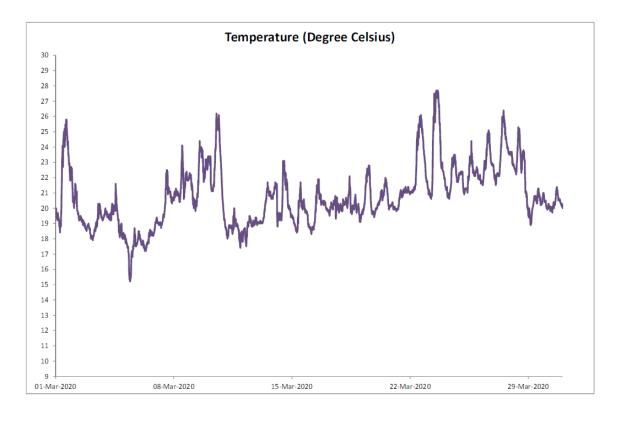


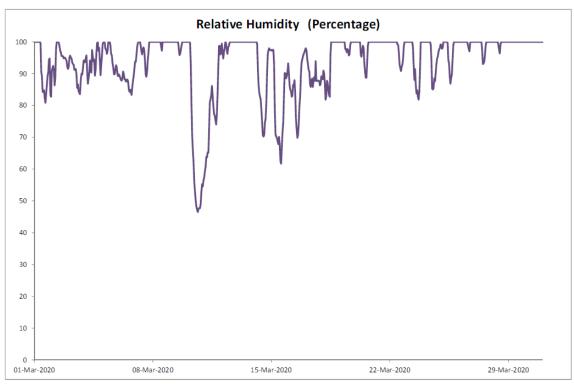


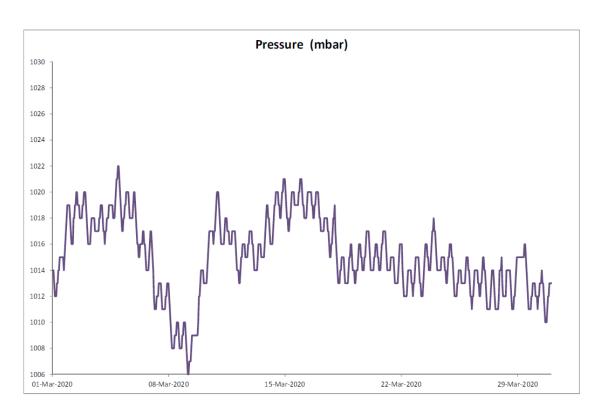

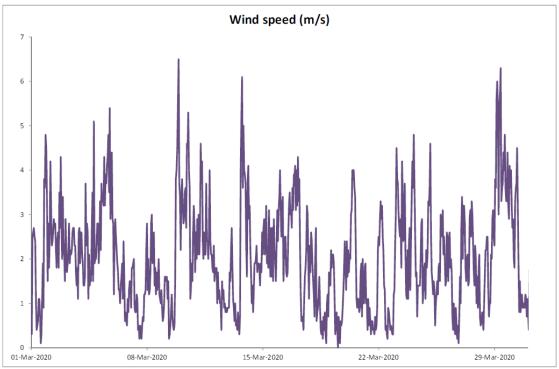

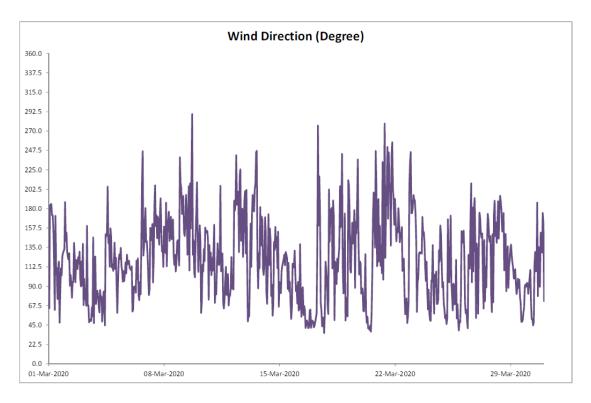

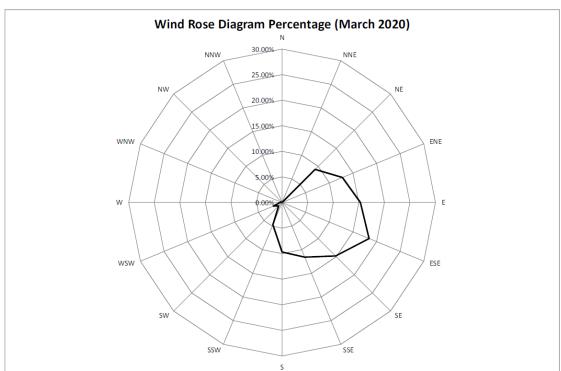

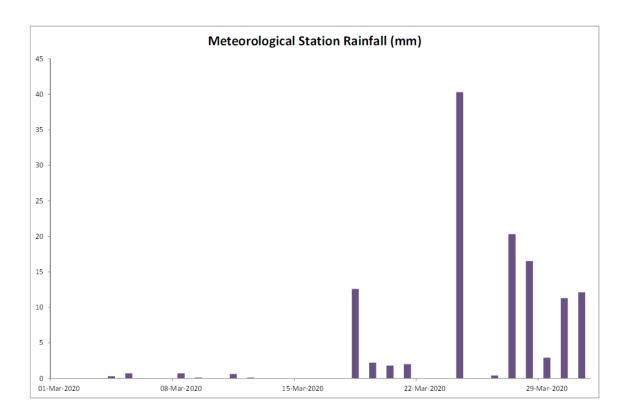

Annex E

Noise

Annex E1

Calibration Certificates for Noise Monitoring Equipment



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C193753

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC19-1098)

Date of Receipt / 收件日期: 5 July 2019

Description / 儀器名稱

Integrating Sound Level Meter (EQ006)

Manufacturer / 製造商

Brüel & Kjær

Model No. / 型號

2238

Serial No. / 編號

2285762

Supplied By / 委託者

Action-United Environmental Services and Consulting

Unit A, 20/F., Gold King Industrial Building, 35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 :

 $(23 \pm 2)^{\circ}$ C

Relative Humidity / 相對濕度 :

 $(50 \pm 25)\%$

Line Voltage / 電壓

TEST SPECIFICATIONS / 測試規節

Calibration check

DATE OF TEST / 測試日期

16 July 2019

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- The Bruel & Kjaer Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試

K P Cheuk

Assistant Engineer

Certified By 核證

K C Lee Engineer Date of Issue 簽發日期

22 July 2019

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 一 校正及檢測實驗所 c/o 香港新界屯門興安里一號四樓



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C193753

證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- 2. Self-calibration using laboratory acoustic calibrator was performed before the test from 6.1.1.2 to 6.4.
- 3. The results presented are the mean of 3 measurements at each calibration point.
- 4. Test equipment:

Equipment ID

Description

Certificate No.

CL280 CL281

40 MHz Arbitrary Waveform Generator

C190176

Multifunction Acoustic Calibrator

CDK1806821

- 5. Test procedure: MA101N.
- 6. Results:
- 6.1 Sound Pressure Level
- 6.1.1 Reference Sound Pressure Level

6.1.1.1 Before Self-calibration

	UUT S	Setting	Applied	Value	UUT	
Range	Parameter	Frequency Time		Level	Freq.	Reading
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)
50 - 130					1	94.4

6.1.1.2 After Self-calibration

UUT Setting			Applied Value		UUT	IEC 60651	
Range	Parameter	Frequency	Time	Level	Freq.	Reading	Type 1 Spec.
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)
50 - 130	L_{AFP}	A	F	94.00	1	94.1	± 0.7

6.1.2 Linearity

	UU	Γ Setting	Applied	d Value	UUT	
Range	Parameter	Frequency	Time	Level	Freq.	Reading
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)
50 - 130	L_{AFP}	A	F	94.00	1	94.1 (Ref.)
				104.00		104.1
				114.00		114.0

IEC 60651 Type 1 Spec. : \pm 0.4 dB per 10 dB step and \pm 0.7 dB for overall different.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C193753

證書編號

6.2 Time Weighting

6.2.1 Continuous Signal

COMMITTER	201111111111111111111111111111111111111								
		Applied Value		UUT	IEC 60651				
Range	Parameter	Frequency	Time	Level	Freq.	Reading	Type 1 Spec.		
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)		
50 - 130	L_{AFP}	A	F	94.00	1	94.1	Ref.		
	L_{ASP}		S			94.1	± 0.1		
	L_{AIP}		I			94.2	± 0.1		

6.2.2 Tone Burst Signal (2 kHz)

	UUT	Setting		Applied Value		UUT	IEC 60651
Range	Parameter	Frequency	Time	Level	Burst	Reading	Type 1 Spec.
(dB)		Weighting	Weighting	(dB)	Duration	(dB)	(dB)
30 - 110	L_{AFP}	A	F	106.0	Continuous	106.0	Ref.
	L _{AFMax}				200 ms	104.9	-1.0 ± 1.0
	L_{ASP}		S		Continuous	106.0	Ref.
	L _{ASMax}				500 ms	102.0	-4.1 ± 1.0

6.3 Frequency Weighting

6.3.1 A-Weighting

UUT Setting		Appl	ied Value	UUT	IEC 60651		
Range	Parameter	Frequency	Time	Level	Freq.	Reading	Type 1 Spec.
(dB)		Weighting	Weighting	(dB)		(dB)	(dB)
50 - 130	L_{AFP}	A	F	94.00	31.5 Hz	55.2	-39.4 ± 1.5
		1			63 Hz	68.1	-26.2 ± 1.5
				2	125 Hz	78.0	-16.1 ± 1.0
					250 Hz	85.4	-8.6 ± 1.0
		_			500 Hz	90.8	-3.2 ± 1.0
					1 kHz	94.1	Ref.
					2 kHz	95.3	$+1.2 \pm 1.0$
					4 kHz	95.1	$+1.0 \pm 1.0$
					8 kHz	93.0	-1.1 (+1.5 ; -3.0)
					12.5 kHz	89.9	-4.3 (+3.0 ; -6.0)

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 — 校正及檢測實驗所 c/o 香港新界屯門興安里—號四樓



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.: C193753

證書編號

6.3.2 C-Weighting

		Setting		Appl	ied Value	UUT	IEC 60651
Range	Parameter	Frequency	Time	Level	Freq.	Reading	Type 1 Spec.
(dB)		Weighting	Weighting	(dB)		(dB)	(dB)
50 - 130	L_{CFP}	C	F	94.00	31.5 Hz	91.5	-3.0 ± 1.5
					63 Hz	93.4	-0.8 ± 1.5
					125 Hz	93.9	-0.2 ± 1.0
					250 Hz	94.1	0.0 ± 1.0
					500 Hz	94.1	0.0 ± 1.0
					1 kHz	94.1	Ref.
					2 kHz	93.9	-0.2 ± 1.0
					4 kHz	93.3	-0.8 ± 1.0
					8 kHz	91.1	-3.0 (+1.5; -3.0)
					12.5 kHz	88.0	-6.2 (+3.0 ; -6.0)

6.4 Time Averaging

UUT Setting			Applied Value				UUT	IEC 60804		
Range	Parameter	Frequency	Integrating	Frequency	Burst	Burst	Burst	Equivalent	Reading	Type 1
(dB)		Weighting	Time	(kHz)	Duration	Duty	Level	Level	(dB)	Spec.
					(ms)	Factor	(dB)	(dB)		(dB)
30 - 110	L_{Aeq}	A	10 sec.	4	1	1/10	110.0	100	100.0	± 0.5
						$1/10^{2}$		90	90.0	± 0.5
			60 sec.			$1/10^{3}$		80	79.2	± 1.0
			5 min.			1/104		70	69.2	± 1.0

Remarks: - UUT Microphone Model No.: 4188 & S/N: 2658547

- Mfr's Spec. : IEC 60651 Type 1 & IEC 60804 Type 1

- Uncertainties of Applied Value : 94 dB : 31.5 Hz - 125 Hz : \pm 0.35 dB

12.5 kHz : ± 0.70 dB

 $\begin{array}{lll} 104~\text{dB}: 1~\text{kHz} & : \pm 0.10~\text{dB}~\text{(Ref. 94 dB)} \\ 114~\text{dB}: 1~\text{kHz} & : \pm 0.10~\text{dB}~\text{(Ref. 94 dB)} \\ \text{Burst equivalent level} & : \pm 0.2~\text{dB}~\text{(Ref. 110 dB)} \\ & \text{continuous sound level)} \end{array}$

- The uncertainties are for a confidence probability of not less than 95 %.

Note:

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 — 校正及檢測實驗所 c/o 香港新界屯門興安里一號四樓



Sun Creation Engineering Limited

Calibration & Testing Laboratory

Certificate of Calibration 校正證書

Certificate No.:

Date of Receipt / 收件日期: 27 August 2019

C194819

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC19-1098)

Description / 儀器名稱

Sound Calibrator (EQ087)

Manufacturer / 製造商

Rion

Model No. / 型號

NC-74

Serial No. / 編號

34657231

Supplied By / 委託者

Action-United Environmental Services and Consulting

Unit A, 20/F., Gold King Industrial Building, 35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 $(23 \pm 2)^{\circ}$ C

Relative Humidity / 相對濕度 : $(50 \pm 25)\%$

TEST SPECIFICATIONS / 測試規範

Calibration check

Line Voltage / 電壓

DATE OF TEST / 測試日期

7 September 2019

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- The Bruel & Kjaer Calibration Laboratory, Denmark
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試

H T Wong

Technical Officer

Certified By 核證

Lee

Date of Issue 簽發日期

10 September 2019

Engineer

written approval of this laboratory 本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory c/o 4/F, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 一 校正及檢測實驗所

c/o 香港新界屯門興安里一號四樓

Tel/電話: (852) 2927 2606 Fax/傳真: (852) 2744 8986

E-mail/電郵: callab@suncreation.com

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

Website/網址: www.suncreation.com

Page 1 of 2



Certificate of Calibration 校正證書

Certificate No.:

C194819

證書編號

The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement 1.

The results presented are the mean of 3 measurements at each calibration point. 2.

3. Test equipment:

> Equipment ID CL130 CL281 TST150A

Description Universal Counter Multifunction Acoustic Calibrator Measuring Amplifier

Certificate No. C193756 CDK1806821 C181288

Test procedure: MA100N.

Results: 5.

5.1 Sound Level Accuracy

UUT	Measured Value	Mfr's Spec.	Uncertainty of Measured Value		
Nominal Value	(dB)	(dB)	(dB)		
94 dB, 1 kHz 94.1		± 0.3	± 0.2		

Frequency Accuracy

1 requeries recuracy					
UUT Nominal Value	Measured Value	Mfr's	Uncertainty of Measured Value		
(kHz)	(kHz)	Spec.	(Hz)		
1	1.001	1 kHz ± 1 %	± 1		

Remark: The uncertainties are for a confidence probability of not less than 95 %.

Note:

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。


Annex E2

Noise Monitoring Results

Table E2.1 Measured Noise Levels (dB(A)) at NM1 during Normal Working Hours (0700-1900 hours; Normal Weekdays)

Start Time	Finish Time	Weather	$L_{10~(30min)}$	L _{90 (30min)}	Leq (30min)
14:36	15:06	Sunny	54.0	47.5	52.2
14:31	15:01	Cloudy	51.5	48.5	50.5
NA	NA	Rainy	Monitor	ing was cance	lled due to
			â	dverse weath	ier.
14:43	15:13	Sunny	57.0	51.5	54.9
				Average	e 52.5
				Mir	n 50.5
				Max	x 54.9
				IVIa	X 34.9
	14:36 14:31 NA	14:36 15:06 14:31 15:01 NA NA	14:36 15:06 Sunny 14:31 15:01 Cloudy NA NA Rainy	14:36 15:06 Sunny 54.0 14:31 15:01 Cloudy 51.5 NA NA Rainy Monitori	14:36 15:06 Sunny 54.0 47.5 14:31 15:01 Cloudy 51.5 48.5 NA NA Rainy Monitoring was cance adverse weath 14:43 15:13 Sunny 57.0 51.5 Average Min

Figure E2.1 Graphical Presentation for Noise Monitoring at NM1

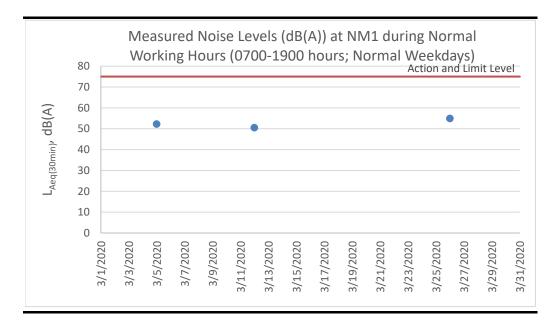

Annex E3

Event and Action Plan for Noise Monitoring

Annex E3 Event and Action Plan for Construction Noise

Event		Action							
	ET	IEC	Contractor						
Action Level	 Identify the source(s) and investigate the cause(s) of exceedance and complaint Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Submit proposals for remedial measures to IEC Implement the agreed proposals 						
Limit Level	 Identify the source(s) and investigate the cause(s) of exceedance and complaint Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Analyse the operation of SENTX and investigate the causes of exceedance Provide interim report to Contractor, IEC, Project Proponent and EPD the causes of the exceedances Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Report the remedial measures implemented and the additional monitoring results to Contactor, IEC, Project Proponent and EPD Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Take immediate measures to avoid further exceedance Submit proposals for remedial measures to IEC within 3 working days of notification Implement the agreed proposals Resubmit proposals if problem still not under control Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated 						

Surface Water Quality

Calibration Certificates for Surface Water Quality Monitoring Equipment



ALS Technichem (HK) Pty Ltd

11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong T: +852 2610 1044 | F: +852 2610 2021

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: MR BEN TAM WORK ORDER: HK2003125

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND

CONSULTING

ADDRESS: RM A 20/F., GOLD KING IND BLDG, SUB-BATCH: 0

NO. 35-41 TAI LIN PAI ROAD,

KWAI CHUNG, N.T. HONG KONG

DATE RECEIVED: 22-Jan-2020

DATE OF ISSUE: 31-Jan-2020

SPECIFIC COMMENTS

Equipment information (Brand name, Model No., Serial No. and Equipment No.) is provided by client. The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

Scope of Test: Conductivity, Dissolved Oxygen, pH Value, Turbidity, Salinity and Temperature

Equipment Type: Multifunctional Meter Brand Name/ Model No.: YSI Professional DSS

Serial No./ Equipment No.: 17B102764/17B100758 (EQW019)

Date of Calibration: 31-Jan-2020

GENERAL COMMENTS

This is the Final Report and supersedes any preliminary report with this batch number. All pages of this report have been checked and approved for release.

Ms. Lin Wai Yu, Iris

Assistant Manager - Inorganic

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

WORK ORDER: HK2003125

SUB-BATCH: 0

DATE OF ISSUE: 31-Jan-2020

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Multifunctional Meter

Brand Name/ Model No.:

YSI Professional DSS

Serial No./ Equipment No.:

17B102764/17B100758 (EQW019)

Date of Calibration: 31-Jan-2020 Date of Next Calibration: 30-Apr-2020

PARAMETERS:

Conductivity Method Ref: APHA (21st edition), 2510B

Expected Reading (µS/cm)	Displayed Reading (μS/cm)	Tolerance (%)
146.9	147.0	+0.1
6667	6374	-4.4
12890	12392	-3.9
58670	56491	-3.7
	Tolerance Limit (%)	±10.0

Dissolved Oxygen

Method Ref: APHA (21st edition), 4500-O: G

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
2.22	2.20	-0.02
4.48	4.55	+0.07
6.76	6.66	-0.10
	Tolerance Limit (mg/L)	±0.20

pH Value Method Ref: APHA (21st edition), 4500H:B

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)
4.0	4.10	+0.10
7.0	6.98	-0.02
10.0	9.92	-0.08
	Tolerance Limit (pH unit)	±0.20

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris

Assistant Manager - Inorganic

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

WORK ORDER: HK2003125

SUB-BATCH: 0

DATE OF ISSUE: 31-Jan-2020

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Multifunctional Meter

Brand Name/ Model No.:

YSI Professional DSS

Serial No./ Equipment No.:

17B102764/17B100758 (EQW019)

Date of Calibration: 31-Jan-2020 Date of Next Calibration: 30-A

30-Apr-2020

PARAMETERS:

Turbidity Method Ref: APHA (21st edition), 2130B

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
0	0.18	
4	4.20	+5.0
40	38.21	-4.5
80	82.04	+2.6
400	394.35	-1.4
800	780.12	-2.5
	Tolerance Limit (%)	±10.0

Salinity Method Ref: APHA (21st edition), 2520B

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)
0	0.00	
10	9.47	-5.3
20	18.72	-6.4
30	30.05	+0.2
	Tolerance Limit (%)	±10.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris

Assistant Manager - Inorganic

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

WORK ORDER: HK2003125

SUB-BATCH: 0

DATE OF ISSUE: 31-Jan-2020

CLIENT: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Multifunctional Meter

Brand Name/ Model No.:

YSI Professional DSS

Serial No./ Equipment No.: 17B102764/17B100758 (EQW019)

Date of Calibration: 31-Jan-2020 Date of Next Calibration: 30-Apr-2020

PARAMETERS:

Temperature Method Ref: Section 6 of International Accreditation New Zealand Technical

Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)
10.0	10.4	+0.4
20.5	19.4	-1.1
41.0	39.3	-1.7
	Tolerance Limit (°C)	±2.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

/ L:5

Ms. Lin Wai Yu, Iris

Assistant Manager - Inorganic

Surface Water Quality Monitoring Results

Table F2.1 Surface Water Quality Monitoring Results at DP4T

Date	Time	Weather Condition	Water Appearance	Water Condition	Water Temperature (°C)	Dissolved Oxygen (DO) (mg/L)	pН	Suspended Solids (SS) (mg/L)
5 Mar 20	14:24	Sunny		Unable	o collect water samp	ole due to insufficient	flow	
12 Mar 20	14:22	Cloudy		Unable	o collect water samp	ole due to insufficient	flow	
18 Mar 20	15:27	Rainy		Unable	o collect water samp	ole due to insufficient	flow	
26 Mar 20	14:32	Sunny		Unable	o collect water samp	ole due to insufficient	flow	
					Average	-	-	-
					Min	-	-	-
					Max	-	-	-
Notes: DP4	was tempor	ary relocated to DP4 (Fut	ure, temporary) (i.e. Dl	P4T) as an interim dis	harge point from th	e monitoring event or	16 May 20	19.

Table F2.2 Surface Water Quality Monitoring Results at DP6

Date	Time	Weather Condition	Water Appearance	Water Condition	Water	Dissolved Oxygen	pН	Suspended
					Temperature (°C)	(DO) (mg/L)		Solids (SS)
								(mg/L)
5 Mar 20	14:08	5 Mar 20		Unable	to collect water samp	ole due to insufficient f	low	
12 Mar 20	14:07	12 Mar 20		Unable	to collect water samp	ole due to insufficient f	low	
18 Mar 20	15:03	18 Mar 20		Unable	to collect water samp	ole due to insufficient f	low	
26 Mar 20	14:11	26 Mar 20		Unable	to collect water samp	ole due to insufficient f	low	
					Average	-	-	-
					Min	-	-	-
					Max	-	-	-

Event and Action Plan for Surface Water Quality Monitoring

Annex F3 Event and Action Plan for Surface Water Quality During Construction Phase

Event	Action						
	ET	IEC	Contractor				
Action Level being exceeded by one sampling day	 Repeat <i>in situ</i> measurement to confirm findings Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Repeat measurement on the next day of exceedance if exceedance is due to the Project 		Rectify any unacceptable practice Amend working methods if appropriate				
Action Level being exceeded by two consecutive sampling days	 Repeat <i>in situ</i> measurement to confirm findings Identify the source(s) and investigate the cause(s) of exceedance Prepare Notification of Exceedance within 24 hours Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Increase the monitoring frequency to daily if exceedance is due to the Project and continue until no exceedance of Action Level 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET Leader and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Submit proposals for remedial measures to IEC Implement the agreed proposals Amend proposal if appropriate 				

Event	Action						
	ET	IEC	Contractor				
Limit Level being exceeded by two consecutive sampling days	 Repeat <i>in situ</i> measurement to confirm findings Identify source(s) of impact and cause(s) of exceedance Prepare the Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Discuss with Contractor and IEC for remedial measures required Ensure remedial measures are properly implemented Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Critically review the working methods Rectify unacceptable practice Check all plant and equipment Consider changes of working methods Discuss with the ET and IEC and propose mitigation measures to the IEC Implement the agreed mitigation measures 				
Limit Level being exceeded by more than two consecutive sampling days	 Repeat <i>in situ</i> measurement to confirm findings Identify source(s) of impact and cause(s) of exceedance Prepare the Notification of Exceedance within 24 hours Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project Check monitoring data, all plant, equipment and Contractor's working methods Discuss with Contractor and IEC for remedial measures required Ensure mitigation measures are implemented Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level for two consecutive days 	 Verify the Notification of Exceedance Check monitoring data submitted by ET Check Contractor's working methods Discuss with ET and Contractor on proposed remedial measures Review proposals on remedial measures Audit the implementation of the remedial measures Audit the effectiveness of the implemented remedial measures 	 Critically review the working methods Rectify unacceptable practice Check all plant and equipment Consider changes of working methods Discuss with the ET and IEC and propose mitigation measures Implement the agreed mitigation measure As directed by the Project Proponent, slow down or stop all or part of the construction activities 				

ENVIRONMENTAL RESOURCES MANAGEMENT

GREEN VALLEY LANDFILL LTD.

Annex G

Cumulative Statistics on Exceedances, Environmental Complaints, Notification of Summons and Status of Prosecutions

 Table G1
 Cumulative Statistics on Exceedances

		Total No. recorded in this reporting period	Total No. recorded since project commencement
Air Quality (24-hr TSP)	Action	0	0
	Limit	0	0
Noise	Action	0	0
	Limit	0	0
Surface Water Quality	Action	0	0
·	Limit	0	33

Table G2 Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions

Reporting Period	Cumulative Statistics				
_	Complaints	Notifications of Summons	Prosecutions		
This Reporting Period (1 – 31 March 2020)	0	0	0		
Total no. received since project commencement	1	0	0		

Annex H

Monitoring Schedule for the Next Reporting Period

South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Construction Phase

April 2020

Sun	Mon	Tue	Wed	Thu	Fri	Sat
			1	Surface Water Monitoring (pm) Noise Monitoring (pm)	3	4 Dust Monitoring
5	6	7	8	Surface Water Monitoring (pm) Noise Monitoring (pm)	Dust Monitoring	11
12	13	14	15	Surface Water Monitoring (pm) Noise Monitoring (pm) Dust Monitoring	17	18
19	20	21	Dust Monitoring	23	24 Surface Water Monitoring (pm) Noise Monitoring (pm)	25
26	27	28 Dust Monitoring	Surface Water Monitoring (pm) Noise Monitoring (pm)	30		

Note

Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.