



翠谷工程有限公司 Green Valley Landfill, Limited

# South East New Territories (SENT) Landfill Extension

Monthly Environmental Monitoring & Audit Report No.36 for December 2021

February 2022

ERM

2509, 25/F One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong T: 2271 3000 F: 3015 8052 www.erm.com





# South East New Territories (SENT) Landfill Extension

# Environmental Certification Sheet EP-308/2008/B and FEP-01/308/2008/B

#### **Reference Document/Plan**

Document/Plan to be Certified/Verified:	Monthly Environmental Monitoring & Audit Report No.36 for December 2021 for South East New Territories (SENT) Landfill Extension
Date of Report:	28 February 2022

#### **Reference EP Condition**

EP Condition:

Condition No. 3.4

Four hard copies and one electronic copy of monthly EM&A Report shall be submitted to the Director within 10 working days after the end of the reporting month. The EM&A Reports shall include a summary of all non-compliance (exceedances) of the environmental quality performance limits (Action and Limit Levels). The submissions shall be verified by the IEC. Additional copies of the submission shall be provided to the Director upon request by the Director.

#### ET Certification

I hereby certify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

Frank Wan, Environmental Team Leader: (ERM Hong-Kong, Limited)

Warchitt T.

Date: 28 February 2022

#### **IEC Verification**

I hereby verify that the above referenced document/plan complies with the above referenced condition of EP-308/2008/B and FEP-01/308/2008/B.

W.K. Chiu, Independent Environmental Checker:

Date: 1 March 2022

(Meinhardt Infrastructure and Environment Limited)

# South East New Territories (SENT) Landfill Extension

# Monthly Environmental Monitoring & Audit Report for December 2021

#### Environmental Resources Management

2509, 25/F, One Harbourfront 18 Tak Fung Street Hunghom, Kowloon Hong Kong Telephone: (852) 2271 3000 Facsimile: (852) 3015 8052 E-mail: post.hk@erm.com http://www.erm.com

Client:		Projec	t No:			
Green Valley Landfill Ltd.		0465169				
			Date: 28 February 2022			
This document presents the Monthly EM&A Report No.36 for December 2021 for <i>South East New Territories (SENT) Landfill</i> <i>Extension</i>		Approved by: Marchith J.				
		Frank Wan <i>Partner</i>				
1	Monthly EM&A Report No.36 (for December 2021) (ES, S2.1.3, S2.3.3, S2.9, Annex D7, Annex D8, Annex F9 revised)	AL	FW	FW	28 Feb 2022	
0	Monthly EM&A Report No.36 (for December 2021)	AL	FW	FW	13 Jan 2022	
Revision	Description	Ву	Checked	Approved	Date	
		Distribution				
This report has been prepared by Environmental Resources Management the trading name of 'ERM Hong-Kong, Limited', with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business			Internal			
and taking account of the resources devoted to it by agreement with the client.		$\boxtimes$	Public			
We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.			Confide	ntial		
This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk.			9001 Quality Management	ISO 45001 Occupational Health and Safety Management		



	EXECUTIVE SUMMARY	1
1	INTRODUCTION	1
1.1	BACKGROUND	1
1.2	PROJECT DESCRIPTION	1
1.3	SCOPE OF THE EM&A REPORT	2
1.4	PROJECT ORGANISATION	2
1.5	SUMMARY OF CONSTRUCTION WORKS	3
1.6	SUMMARY OF EM&A PROGRAMME REQUIREMENTS	4
1.7	STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONM	MENTAL
	Permit	5
1.8	STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS	5
2	EM&A RESULTS	7
2.1	AIR QUALITY MONITORING	7
2.2	NOISE MONITORING	16
2.3	WATER QUALITY MONITORING	18
2.4	LANDFILL GAS MONITORING	26
2.5	LANDSCAPE AND VISUAL MONITORING	30
2.6	EM&A SITE INSPECTION	31
2.7	WASTE MANAGEMENT STATUS	33
2.8	IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES	33
2.9	SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMAN	NCE
	LIMIT	33
2.10	SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL	
	PROSECUTIONS	34
3	FUTURE KEY ISSUES	35
3.1	CONSTRUCTION PROGRAMME FOR THE COMING MONTH	35
3.2	Key Issues for the Coming Month	35
3.3	MONITORING SCHEDULE FOR THE COMING MONTH	35
4	CONCLUSION AND RECOMMENDATION	36

#### ANNEXES

ANNEX A WORK PROGRAMME

ANNEX B ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

ANNEX C MONITORING SCHEDULE FOR THIS REPORTING PERIOD

ANNEX D AIR QUALITY

ANNEX D1 CALIBRATION CERTIFICATES FOR DUST MONITORING EQUIPMENT

ANNEX D2 24-HOUR TSP MONITORING RESULTS

ANNEX D3 EVENT AND ACTION PLAN FOR DUST MONITORING

ANNEX D4 METEOROLOGICAL DATA

ANNEX D5 CERTIFICATES OF THE QUALIFIED ODOUR PANELIST

ANNEX D6 ODOUR MONITORING RESULTS

ANNEX D7 THERMAL OXIDIZER, LANDFILL GAS FLARE AND LANDFILL GAS GENERATOR STACK EMISSION MONITORING RESULTS

ANNEX D8 INVESTIGATION REPORTS OF ENVIRONMENTAL QUALITY LIMIT EXCEEDANCE

ANNEX E NOISE

ANNEX E1 CALIBRATION CERTIFICATES FOR NOISE MONITORING EQUIPMENT

ANNEX E2 NOISE MONITORING RESULTS

ANNEX E3 EVENT AND ACTION PLAN FOR NOISE MONITORING

ANNEX F WATER QUALITY

ANNEX F1 CALIBRATION CERTIFICATES FOR SURFACE WATER QUALITY MONITORING EQUIPMENT

ANNEX F2 SURFACE WATER QUALITY MONITORING RESULTS

ANNEX F3 EVENT AND ACTION PLAN FOR SURFACE WATER QUALITY MONITORING

ANNEX F4 CALIBRATION CERTIFICATES FOR EFFLUENT QUALITY MONITORING EQUIPMENT

ANNEX F5 LEACHATE LEVELS MONITORING RESULTS

ANNEX F6 EFFLUENT QUALITY MONITORING RESULTS

ANNEX F7 CALIBRATION CERTIFICATES FOR GROUNDWATER MONITORING EQUIPMENT

ANNEX F8 GROUNDWATER MONITORING RESULTS

ANNEX F9 INVESTIGATION REPORTS OF ENVIRONMENTAL QUALITY LIMIT EXCEEDANCE

ANNEX G LANDFILL GAS

ANNEX G1 LANDFILL GAS MONITORING LOCATIONS FOR SERVICE VOIDS, UTILITIES AND MANHOLES ALONG THE SITE BOUNDARY AND WITHIN THE SENTX SITE ANNEX G2 CALIBRATION CERTIFICATES FOR LANDFILL GAS MONITORING EQUIPMENT

ANNEX G3 LANDFILL GAS MONITORING RESULTS

ANNEX G4 EVENT AND ACTION PLAN FOR LANDFILL GAS MONITORING

ANNEX H CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL COMPLAINTS, NOTIFICATION OF SUMMONS AND STATUS OF PROSECUTIONS

ANNEX I MONITORING SCHEDULE FOR THE NEXT REPORTING PERIOD

### EXECUTIVE SUMMARY

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction, operation/restoration and aftercare of SENTX Project ("the Project") in accordance with the requirements specified in the Environmental Permit (EP), updated Environmental Monitoring and Audit (EM&A) Manual, the approved Environmental Impact Assessment (EIA) Report of the Project taking account of the latest design and other relevant statutory requirements. The construction (not including works related to site clearance and preparation) and operation of the Project commenced on 2 January 2019 and 21 November 2021, respectively.

This Monthly EM&A report presents the EM&A works carried out during the period from 1 to 31 December 2021 for the Project in accordance with the updated EM&A Manual.

### Exceedance of Action and Limit Levels for Air Quality

One exceedance of the Limit Level for Total Suspended Particulates (TSP) and one exceedance of the Limit Level for landfill gas flare stack emission (Carbon Monoxide (CO)) were recorded for air quality impact monitoring in the reporting period. The TSP exceedance at AM4 on 13 December 2021 was considered non Project-related upon further investigation. The landfill gas flare stack emission (CO) exceedance on 17 December 2021 was found to be Project-related.

## Exceedance of Action and Limit Levels for Noise

No exceedance of Action and Limit Levels for operation/ restoration phase noise monitoring was recorded in the reporting period.

## Exceedance of Action and Limit Levels for Water Quality

One exceedance of the Limit Level for groundwater (Chemical Oxygen Demand (COD)) was recorded for water quality impact monitoring in the reporting period. The groundwater (COD) exceedance at MWX-6 on 8 December 2021 was considered non Project-related upon further investigation.

## Exceedance of Action and Limit Levels for Landfill Gas

No exceedance of Action and Limit Levels for operation/ restoration phase landfill gas monitoring was recorded in the reporting period.

#### **Environmental Complaints, Summons and Prosecutions**

There were no complaints, notification of summons or prosecution recorded in the reporting period.

## **Reporting Change**

There was no reporting change in the reporting period.

#### **Future Key Issues**

Potential environmental impacts arising from the upcoming construction/ operational activities in the next reporting period of January 2022 are mainly associated with dust emission from the exposed area and loading and unloading operation of dusty materials.

#### 1 INTRODUCTION

#### 1.1 BACKGROUND

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. The *Environmental Impact Assessment (EIA) Report* and the associated *Environmental Monitoring and Audit (EM&A) Manual* for the construction, operation, restoration and aftercare of the SENTX (hereafter referred to as "the Project") have been approved under the *Environmental Impact Assessment Ordinance (EIAO)* in May 2008 (Register No.: AEIAR-117/2008) (hereafter referred to as the approved EIA Report) and an Environmental Permit (EP-308/2008) (EP) was granted by the Director of Environmental Protection (DEP) on 5 August 2008.

Since then, applications for Variation of an Environmental Permit (No. VEP-531/2017) were submitted to EPD and the Variation of Environmental Permits (EP-308/2008/A and EP-308/2008/B) were granted on 6 January 2012 and 20 January 2017, respectively, as the Hong Kong SAR Government has decided to reduce the scale of the design scheme of SENTX assessed in the approved EIA Report and SENTX will only receive construction waste. In May 2018, a Further Environmental Permit (FEP) (FEP-01/308/2008/B) was granted to the SENTX's contractor, Green Valley Landfill, Limited (GVL).


ERM-Hong Kong, Limited (ERM) and Meinhardt Infrastructure and Environment Limited (Meinhardt) are commissioned to undertake the roles of Environmental Team (ET) and the Independent Environmental Checker (IEC), respectively, to undertake the EM&A activities for the Project in accordance with the requirements specified in the EP, updated EM&A Manual <sup>(1)</sup>, approved EIA Report <sup>(2)</sup> taking account of the latest design and other relevant statutory requirements.

#### 1.2 **PROJECT DESCRIPTION**

The SENTX is a piggyback landfill, occupying the southern part of the existing SENT Landfill (including its infrastructure area) and 13 ha of Tseung Kwan O (TKO) Area 137. A layout plan of the SENTX is shown in *Figure 1.1*. Under the latest design, the SENTX has a net void capacity of about 6.5 Mm<sup>3</sup> and provides an additional lifespan of about 6 years, commencing operation upon exhaustion of the SENT Landfill. The SENTX will receive construction waste only.

<sup>(1)</sup> ERM (2018). South East New Territories (SENT) Landfill Extension: Environmental Monitoring & Audit Manual

<sup>(2)</sup> ERM (2007). South East New Territories (SENT) Landfill Extension – Feasibility Study: Environmental Impact Assessment Report

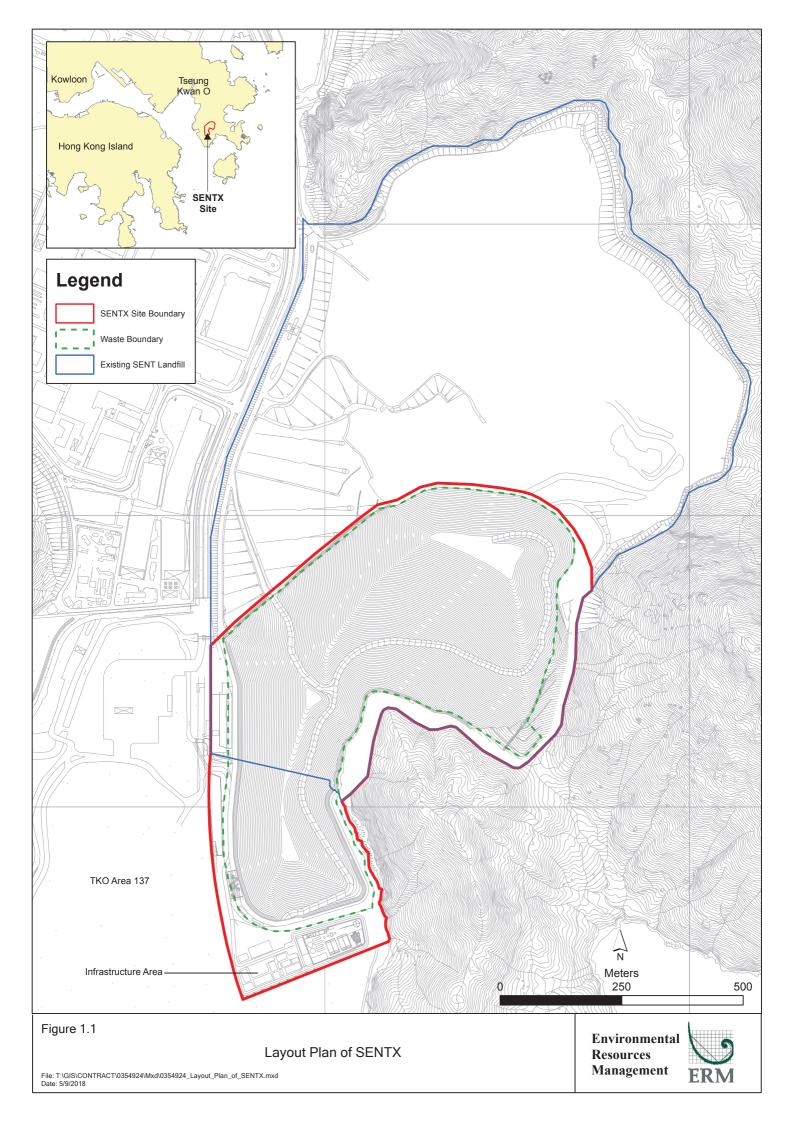

The key implementation milestones of the Project are indicatively summarised in *Table 1.1*. The construction works and operation of the Project commenced on 2 January 2019 and 21 November 2021, respectively.

## Table 1.1Estimated Key Dates of Implementation Programme

Key Stage of the Project	Indicative Date
Start construction	2 January 2019
Commissioning of new infrastructure facilities	2020
Demolition of existing infrastructure facilities	2021
Start waste intake at SENTX	21 November 2021
Estimated exhaustion date of SENTX	2027
End of aftercare for SENTX	2057

The major construction works of the SENTX includes:

- Site formation at the TKO Area 137 and the existing infrastructure area at SENT Landfill;
- Construction of surface and groundwater drainage systems;
- Construction of the leachate containment and collection systems;
- Construction of new leachate and landfill gas treatment facilities, site offices, maintenance yards at the new infrastructure area;
- Construction of new pipelines to transfer the leachate and landfill gas collected from the existing SENT Landfill to the treatment facilities at the new infrastructure area;
- Construction of the site access and new waste reception facilities; and
- Demolition of the facilities at the existing SENT Landfill infrastructure area.


#### 1.3 SCOPE OF THE EM&A REPORT

This is the Monthly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 to 31 December 2021 for the construction and operation works.

#### 1.4 **PROJECT ORGANISATION**

The organisation structure of the Project is presented in *Figure 1.2*.

## Figure 1.2 Organisation Chart

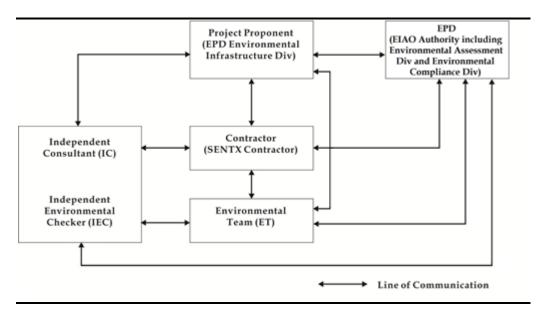

Contact details of the key personnel are summarised in *Table 1.2* below.

Table 1.2Contact Information of Key Personnel

Party	Position	Name	Telephone
Contractor	Project Manager	Gary Barnicott	2706 8827
(Green Valley Landfill			
Limited)			
Environmental Team (ET)	ET Leader	Frank Wan	2271 3152
(ERM-Hong Kong, Limited)			
Independent Environmental	IEC	W.K. Chiu	2858 0738
Checker (IEC)			
(Meinhardt Infrastructure			
and Environment Limited)			

#### 1.5 SUMMARY OF CONSTRUCTION WORKS

The programme of the construction is shown in *Annex A*. As informed by the Contractor, the major works carried out in this reporting period include:

- Follow up on civil provision work defects at Landfill Gas (LFG) Plant, Leachate Treatment Plant (LTP), infrastructure area and waste reception area;
- Construction of MSE wall;
- Site formation for Cell 4X;
- Liner works at Cell 4X; and
- Maintenance and improvement of temporary surface water drainage.

The implementation schedule of the mitigation measured recommended in the Updated EM&A Manual is presented in *Annex B*.

#### 1.6 SUMMARY OF EM&A PROGRAMME REQUIREMENTS

The status for all environmental aspects are presented in *Table 1.3*. The EM&A requirements remained unchanged during the reporting period.

Table 1.3Summary of Status for the Environmental Aspects under the Updated EM&A<br/>Manual

Parameters	Status
Air Quality	
Baseline Monitoring	The results of baseline air quality monitoring were reported in
	Baseline Monitoring Report and Pre-operation Baseline
	Monitoring Report and submitted to EPD under EP Condition
	3.3
Impact Monitoring	On-going
Noise	
Baseline Monitoring	The results of baseline noise monitoring were reported in
	Baseline Monitoring Report and submitted to EPD under EP
	Condition 3.3
Impact Monitoring	On-going
Water Quality	
Baseline Monitoring	The results of baseline surface water quality monitoring were
	reported in Baseline Monitoring Report and Pre-operation
	Baseline Monitoring Report and submitted to EPD under EP
	Condition 3.3
Impact Monitoring	On-going
Landfill Gas	
Impact Monitoring	On-going
Waste Management	
Waste Monitoring	On-going
Landscape and Visual	
Baseline Monitoring	The results of baseline landscape and visual monitoring were
	reported in Baseline Monitoring Report and submitted to EPD
	under EP Condition 3.3
Operation Phase Audit	On-going
Site Environmental Audit	
Regular Site Inspection	On-going
Complaint Hotline and Email	On-going
Channel	
Environmental Log Book	On-going

Taking into account the operation works, impact monitoring of air quality, noise, water quality, landfill gas and waste management were carried out in the reporting period. The impact monitoring schedule of air quality, noise, water quality and landfill gas monitoring are provided in *Annex C*.

The EM&A programme also involved environmental site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation measures recommended in the approved EIA Report and relevant EP submissions. To promote the environmental awareness and enhance the environmental performance of the contractors, environmental trainings and regular environmental management meetings were conducted during the reporting period, which are summarised as below:

- One environmental management meeting was held with the Contractor, ER, ET, IEC and EPD on 16 December 2021; and
- Environmental toolbox trainings on Noise Control Ordinance and Air Pollution Control (NRMM) Regulation were provided on 8 December and 22 December 2021 respectively by the Contractor to the workers.

# 1.7 STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT

The status of statutory environmental compliance with the EP conditions under the EIAO, submission status under the EP and implementation status of mitigation measures are presented in *Table 1.4*.

# Table 1.4Status of Submissions required under the EP and Implementation Status of<br/>Mitigation Measures

EP Condition	Submission / Implementation Status	Status
2.3	Management Organisation of Main Construction Companies	Submitted and accepted by EPD.
2.4	Setting up of Community Liaison Group	Community Liaison Group was set up
2.5	Submission of Detailed Landfill Gas Hazard Assessment Report	Submitted and accepted by EPD on 10 January 2019.
2.6	Submission of Restoration and Ecological Enhancement Plan	Submitted to EPD on 28 June 2019.
2.7	Setting up of Trial Nursery	Trial Nursery works was commenced on 28 August 2019.
2.8	Advance Screen Planting	Advance Screen Planting works were completed on 28 June 2019.
2.9	Provision of Multi-layer Composite Liner System	•

#### 1.8 STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS

The environmental licenses and permits (including EP, *Water Pollution Control Ordinance* (WPCO) discharge license, registration as a chemical waste producer, and construction noise permit) that are valid in the reporting period are presented in *Table 1.5*. No non-compliance with environmental statutory requirements was identified.

# Table 1.5Status of Statutory Environmental Requirements

Description	Ref No.	Status
Environmental Permit	EP-308/2008	Granted on 5 August 2008
Variation of Environmental Permit	EP-308/2008/A	Granted on 6 January 2012
	EP-308/2008/B	Granted on 20 January 2017
Further Environmental Permit	FEP-01/308/2008/B	Granted on 16 May 2018
Water Discharge License under	Licence No.: WT00033525-	Validity from 27 March
WPCO (Permit Holder: Chun Wo)	2019	2019 to 31 March 2024
Water Discharge License under	Licence No.: WT00036269-	Validity from 21 June 2020
WPCO (Permit Holder: GVL)	2020	to 30 June 2022
Billing Account for Disposal of	Chit Account Number:	Approved on 28 December
Construction Waste	5001692	2005
Registration as a Chemical Waste	5213-839-C3507-10	Issued on 23 August 2018
Producer (Permit Holder: Chun Wo)		
Registration as a Chemical Waste	5518-839-R2289-06	Issued on 24 October 2019
Producer (Permit Holder: REC)		
Construction Noise Permit (Permit	GW-RE0990-21	Validity from 6 October
Holder: GVL)		2021 to 5 April 2022
Construction Noise Permit (Permit	GW-RE0564-21	Validity from 7 June 2021 to
Holder: Chun Wo)		6 December 2021
Construction Noise Permit (Permit	GW-RE1138-21	Validity from 16 November
Holder: Paul Y.)		2021 to 15 February 2022

#### 2 EM&A RESULTS

The EM&A programme for the Project required environmental monitoring for air quality, noise, water quality and landfill gas as well as environmental site inspections for air quality, noise, water quality, landfill gas, waste management, and landscape and visual impacts. The EM&A requirements and related findings for each component are summarised in the following sections.

#### 2.1 AIR QUALITY MONITORING

#### 2.1.1 Dust Monitoring

#### Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact dust monitoring (in term of Total Suspended Particulates (TSP)) was carried out at the four designated locations along the site boundary (i.e. AM1, AM2, AM3 and AM4) during the operation/restoration phase, at a 6-day interval.


The Action and Limit Levels of the dust monitoring is provided in *Table 2.1* below.

Table 2.1Action and Limit Levels for 24-hour TSP

Monitoring Station	Action Level	Limit Level
AM1 - SENTX Site Boundary (North)		
AM2 - SENTX Site Boundary (West, near DP3)	2(0,	$2(0, \dots, m)^3$
AM3 - SENTX Site Boundary (West, near RC15)	260 μg m- <sup>3</sup>	260 μg m- <sup>3</sup>
AM4 - SENTX Site Boundary (West, near EPD building)		

High volume air samplers (HVSs) in compliance with the specifications listed under Section 3.2.2 of the updated EM&A Manual were used to measure 24hour TSP levels at the dust monitoring stations. The HVSs were calibrated upon installation and thereafter at bi-monthly intervals to check the validity and accuracy of the results.

The equipment used in the impact dust monitoring programme and monitoring locations are summarised in *Table 2.2* and illustrated in *Figure 2.1*, respectively. Copies of the calibration certificates for the equipment are presented in *Annex D1*.

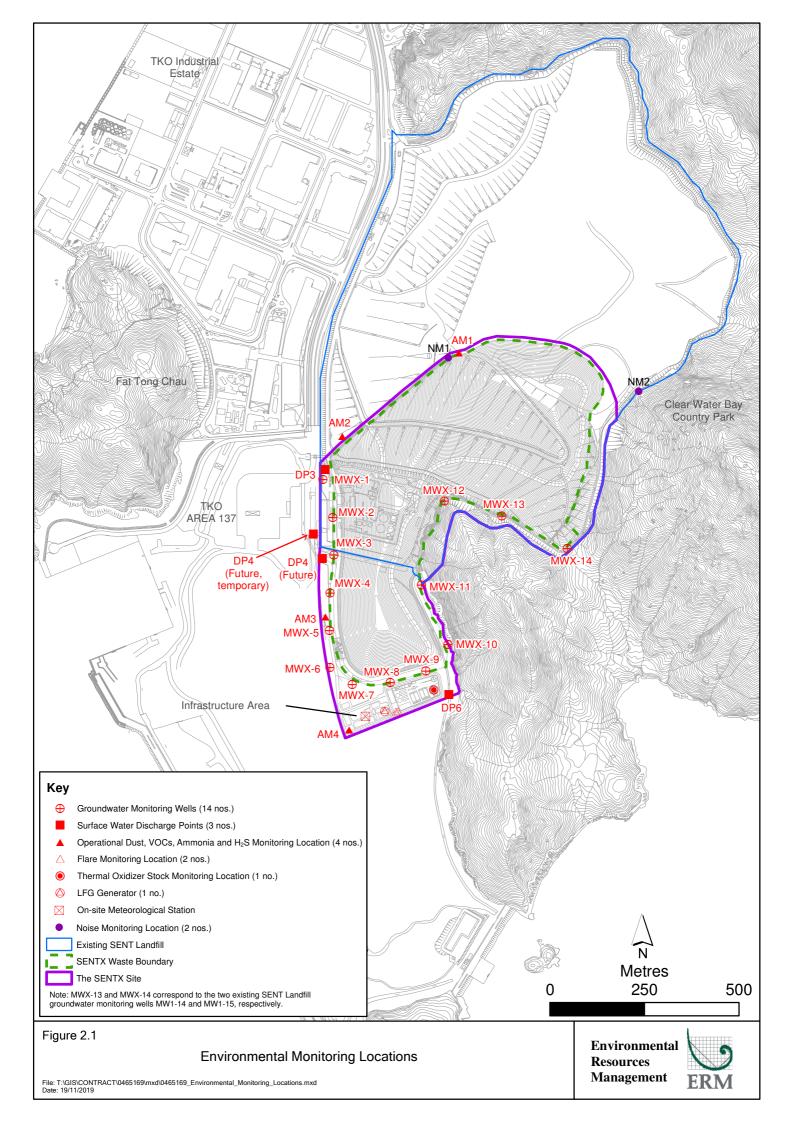

### Table 2.2Dust Monitoring Details

Monitoring Station	Location	Parameter	Frequency and Duration	Monitoring Dates	Equipment
AM1	SENTX Site Boundary (North)	24-hour TSP	Once every 6 days	1, 7, 13, 19, 25, 31 Dec	Tisch TE-5170 (S/N: 1190)
AM2	SENTX Site Boundary (West, near DP3)			2021	Tisch TE-5170 (S/N: 1047)
AM3	SENTX Site Boundary (West, near RC15)				Tisch TE-5170 (S/N: 1258)
AM4	SENTX Site Boundary (West, near EPD building)	_			Tisch TE-5170 (S/N: 1101)

Monitoring Schedule for the Reporting Month

The schedule for dust monitoring during the reporting period is provided in *Annex C*.

#### **Results and Observations**

The monitoring results for 24-hour TSP are summarised in *Table 2.3*. The detailed monitoring results and the graphical presentation of the 24-hour TSP results at each monitoring location are provided in *Annex D2*.

## Table 2.3Summary of 24-hour TSP Monitoring Results in the Reporting Period

Monitoring Station	Average 24-hr TSP Concentration (µg m <sup>-3</sup> ) (Range in bracket)	Action Level (µg/m³)	Limit Level (µg/m³)
AM1 - SENTX Site Boundary (North)	112 (57 - 173)	260	260
AM2 - SENTX Site Boundary (West, near DP3)	129 (100 - 156)	260	260
AM3 - SENTX Site Boundary (West, near RC15)	182 (128 - 258)	260	260
AM4 - SENTX Site Boundary (West, near EPD building)	168 (102 - 282)	260	260

The major dust sources in the reporting period included fugitive dust emission from exposed area in SENTX, as well as nearby operations of the SENTX and the TKO Area 137 Fill Bank.

Action and Limit Levels exceedance was recorded for TSP monitoring in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex D3* were undertaken. Investigation of the Action and Limit Levels exceedance was conducted and the investigation report is presented in *Annex D8*.

Based on the investigation conducted for the monitoring event with potential Action and Limit Levels exceedance with the Contractor and the IEC, the TSP exceedance at AM4 on 13 December 2021 was considered non Project-related. The Contractor was reminded to implement all relevant mitigation measures for the construction and operation works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor's compliance of the environmental requirements.

#### Meteorological Data

Meteorological data obtained from the SENTX on-site meteorological monitoring station was used for the dust monitoring and is shown in *Annex D4*. It is considered that meteorological data obtained at the on-site meteorological monitoring station is representative of the Project area and could be used for the operation/restoration phase dust monitoring programme for the Project.

#### 2.1.2 *Odour Monitoring*

#### Monitoring Requirements

According to the updated EM&A Manual of the Project, odour patrol was carried out along the site boundary during the operation/ restoration phase. During the first month of operation, daily odour patrol (3 times per day) was conducted jointly by the ET and the IEC. The odour intensity detected was based on that determined by the IEC. In addition, an independent party (ALS Technichem (HK) Pty Ltd.) was appointed to undertake odour patrol together with the ET and IEC three times per week. During these patrols, the odour intensity detected was based on that determined by the independent third party.


The Action and Limit Levels for odour patrol is provided in *Table 2.4* below.

Table 2.4Action and Limit Levels for Odour Patrol

Parameter	Action Level	Limit Level
Perceived odour intensity and odour complaints	<ul> <li>Odour intensity ≥ Class 2 recorded; or</li> <li>One documented complaint received</li> </ul>	<ul> <li>Odour intensity ≥ Class 3 recorded on 2 consecutive patrol <sup>(a)</sup> <sup>(b)</sup></li> </ul>
( )	rong or Class 4-extreme odour intensity do not need to b	5

Odour patrol was conducted by trained personnel / competent persons with a specific sensitivity to a reference odour (i.e. on reference materials n-butanol with the concentration of 50ppm in nitrogen (v/v)) in compliance with Section 3.7.2 of the updated EM&A Manual patrolling and sniffing along the SENTX Site boundary to detect any odour.

The odour monitoring programme and patrol route are summarised in *Table* 2.5 and illustrated in *Figure* 2.2 respectively. Copies of the certificates of the qualified odour panelist are presented in *Annex* D5.

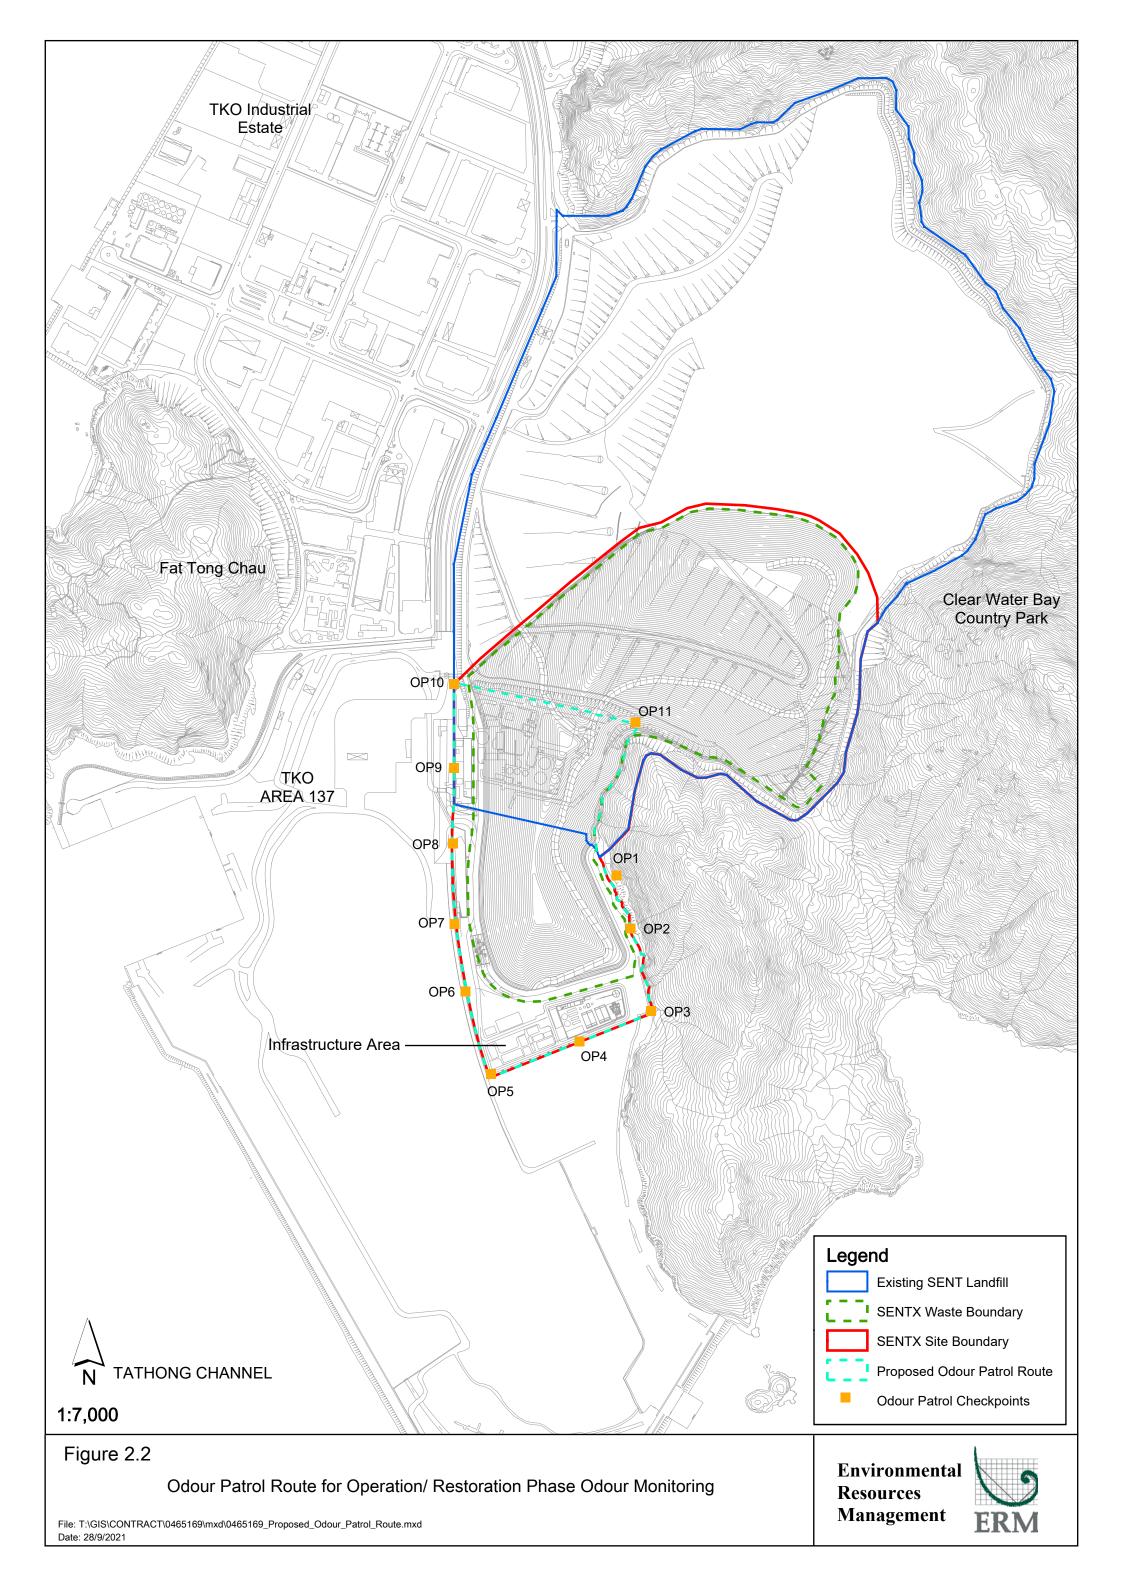

Patrol	Parameters	Patrol Frequency <sup>(a)</sup>	Monitoring Dates and
Locations			Time
Patrol along	Odour	Period 1 - First month of operation	Conducted by ET &
the SENTX	Intensity (see	Daily, three times a day in the morning,	IEC:
Site Boundary	Table 2.6)	afternoon and evening/night (between	1 – 31 Dec 2021
(Checkpoints		18:00 and 22:00 hrs) conducted by the	(10:30 - 12:00, 14:30 -
OP1 - OP11		ET and the IEC	16:00, 18:00 - 19:30)
(d))			
		Three times per week on different days	Conducted by an
		conducted by an independent third	independent third
		party together with the ET and IEC $^{(b)}$	<u>party, ET &amp; IEC:</u>
			1 Dec 2021 (14:30 -
		Period 2 - Three months following	16:00), 3 Dec 2021
		period 1 <sup>(c)</sup>	(10:00 – 12:00), 6 Dec
			2021 (14:30 - 16:00), 8
		Weekly conducted by the ET and the	Dec 2021 (10:00 -
		IEC	12:00), 10 Dec 2021
			(10:00 - 12:00), 13 Dec
		Once every two weeks conducted by an	2021 (10:00 - 12:00), 15
		independent third party together with	Dec 2021 (10:00 -
		the ET and IEC <sup>(b)</sup>	12:00), 17 Dec 2021
			(14:30 - 16:00), 20 Dec
		Period 3 - Throughout operation	2021 (10:00 - 12:00), 22
		following period 2 (c)	Dec 2021 (14:30 -
		Monthly conducted by the ET and the	16:00), 24 Dec 2021
		IEC	(14:30 - 16:00), 28 Dec
			2021 (14:30 - 16:00), 29
		Quarterly conducted by an independent	Dec 2021 (10:00 -
		third party together with the ET and	12:00), 31 Dec 2021
		IEC <sup>(b)</sup>	(14:30 - 16:00)
Notes:			•

#### Notes:

- (a) Reduction of monitoring frequency will be subject to the monitoring results to demonstrate environmentally acceptable performance.
- (b) Patrol shall be scheduled so that they are carried out together with the patrols to be carried out jointly by the ET and the IEC.
- (c) Commencement of each period will be justified by the ET Leader and verified by the IEC and will be subject to agreement with the EPD (EIAO Authority) and Project Proponent.
- (d) The revised odour patrol route with the addition of checkpoint OP11 was applied from 10 December 2021.

#### Table 2.6 **Odour Intensity Level**

Class	<b>Odour Intensity</b>	Description
0	Not Detected	No odour perceived or an odour so weak that it cannot be easily characterised or described.
1	Slight	Identified odour, slight
2	Moderate	Identified odour, moderate
3	Strong	Identified odour, strong
4	Extreme	Severe odour

Monitoring Schedule for the Reporting Month

The schedule for odour patrol during the reporting period is provided in Annex C.

#### **Results and Observations**

The odour monitoring results are summarised and provided in *Table 2.7* and *Annex D6*, respectively.

Odour Checkpoints	Odour Intensity Class (Range)	Action Level	Limit Level
OP1	0 - 1	Odour intensity $\geq$	Odour intensity $\geq$
OP2	0 - 1	Class 2 recorded	Class 3 recorded
OP3	0 - 1		on 2 consecutive patrol
OP4	0 - 1		pation
OP5	0 - 1		
OP6	0 - 1		
OP7	0 - 1		
OP8	0 - 1		
OP9	0 - 1		
OP10	0		
OP11	0 - 1		

#### Table 2.7Summary of Odour Monitoring Results in the Reporting Period

The potential odour sources in the reporting period included the construction works, operation of leachate treatment plant, generator, slurry truck, excavator, vehicles and vegetation at SENTX, as well as nearby operations of the Town Gas Plant.

All the odour monitoring results were below the Action and Limit Levels in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex D3*.

#### 2.1.3 Thermal Oxidiser, Landfill Gas Flare and Landfill Gas Generator Stack Emission Monitoring

#### Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, the performance of the thermal oxidiser, landfill gas flare and landfill gas generator was monitored when they are in operation. Gas samples were collected from the stack of the thermal oxidizer, landfill gas flare and landfill gas generator for laboratory analysis for NO<sub>2</sub>, CO, SO<sub>2</sub>, Benzene and Vinyl chloride and in-situ analysis for exhaust gas velocity at monthly interval. The operating conditions of the thermal oxidiser, landfill gas flare and landfill gas generator were also monitored continuously.

The Limit Levels for stack emission of the thermal oxidiser, landfill gas flare and landfill gas generator are provided in *Tables 2.8 – 2.10* below.

ENVIRONMENTAL RESOURCES MANAGEMENT

## Table 2.8Limit Levels for Stack Emission of the Thermal Oxidiser

Parameters	Limit Level	
NO <sub>2</sub>	1.58 gs <sup>-1</sup>	
СО	0.53 gs <sup>-1</sup>	
SO <sub>2</sub>	0.07 gs <sup>-1</sup>	
Benzene	3.01 x 10 <sup>-2</sup> gs <sup>-1</sup>	
Vinyl chloride	2.23 x 10 <sup>-3</sup> gs <sup>-1</sup>	
Gas combustion temperature	850°C (minimum)	
Exhaust gas exit temperature	443K (minimum) <sup>(a)</sup>	
Exhaust gas velocity	7.5 ms <sup>-1</sup> (minimum) <sup>(a)</sup>	
Note: (a) Level under full load condition.		

Table 2.9Limit Levels for Stack Emission of the Landfill Gas Flare

Parameters	Limit Level
NO <sub>2</sub>	0.97 gs <sup>-1</sup>
СО	2.43 gs <sup>-1</sup>
SO <sub>2</sub>	0.22 gs <sup>-1</sup>
Benzene	4.14 x 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl Chloride	2.60 x 10 <sup>-4</sup> gs <sup>-1</sup>
Gas combustion temperature	815°C (minimum)
Exhaust gas exit temperature	923 K (minimum) <sup>(a)</sup>
Exhaust gas velocity	9.0 m s <sup>-1</sup> (minimum) <sup>(a)</sup>
Note:	
(a) Level under full load condition.	

Table 2.10Limit Levels for Stack Emission of the Landfill Gas Generator

Parameters	Limit Level
NO <sub>2</sub>	1.91 gs <sup>-1</sup>
СО	2.48 gs <sup>-1</sup>
SO <sub>2</sub>	0.528 gs <sup>-1</sup>
Benzene	2.47 x 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl chloride	1.88 x 10 <sup>-5</sup> gs <sup>-1</sup>
Gas combustion temperature	450°C (minimum)
Exhaust gas exit temperature	723K (minimum) <sup>(a)</sup>
Exhaust gas velocity	30.0 ms <sup>-1</sup> (minimum) <sup>(a)</sup>
Note:	
(a) Level under full load condition.	

Gas samples were collected from the centroid of the stack with stainless steel sampling probe, into inert sample containers (i.e. Canister and Tedlar Bag) and transferred to ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066) laboratory within 24 hours of collection for direct analysis on a gas chromatography within 48 hours after collection. The flue gas velocity of the gas stream at the exhaust of thermal oxidize was determined by S-Pitot tube during the emission sampling.

The stack emission monitoring programme and monitoring locations are summarised in *Table 2.11* and illustrated in *Figure 2.1*, respectively.

# Table 2.11Thermal Oxidiser, Landfill Gas Flare and Landfill Gas Generator Stack<br/>Emission Monitoring Details

Monitoring Location	Parameter	Frequency	Monitoring Date
Stack of Thermal Oxidiser	Laboratory analysis for NO <sub>2</sub> CO SO <sub>2</sub> Benzene Vinyl chloride In-situ analysis for Exhaust gas velocity	Monthly for the first 12 months of operation and thereafter at quarterly intervals	20 Dec 2021
	<ul> <li>Gas combustion temperature</li> <li>Exhaust temperature</li> <li>Exhaust gas velocity <sup>(a)</sup></li> </ul>	Continuously	1 - 31 Dec 2021
Stack of Landfill Gas Flare	Laboratory analysis for • NO <sub>2</sub> • CO • SO <sub>2</sub> • Benzene • Vinyl chloride In-situ analysis for • Exhaust gas velocity	Monthly for the first 12 months of operation and thereafter at quarterly intervals	17 Dec 2021
	<ul> <li>Gas combustion temperature</li> <li>Exhaust temperature</li> <li>Exhaust gas velocity <sup>(a)</sup></li> </ul>	Continuously	1 – 31 Dec 2021
Stack of Landfill Gas Generator	<ul> <li>Laboratory analysis for</li> <li>NO<sub>2</sub></li> <li>CO</li> <li>SO<sub>2</sub></li> <li>Benzene</li> <li>Vinyl chloride In-situ analysis for</li> <li>Exhaust gas velocity</li> </ul>	Monthly for the first 12 months of operation and thereafter at quarterly intervals	17 Dec 2021
	<ul> <li>Exhaust temperature</li> <li>Exhaust gas velocity <sup>(a)</sup></li> </ul>	Continuously	1 – 31 Dec 2021

#### Note:

(a) The exhaust gas velocity will be calculated based on the cross-section area of the stack and continuous monitored gas flow and combustion temperature data.

#### Monitoring Schedule for the Reporting Month

The schedule for thermal oxidizer, landfill gas flare and landfill gas generator stack emission monitoring during the reporting period is provided in *Annex C*.

#### **Results and Observations**

The thermal oxidizer, landfill gas flare and landfill gas generator stack emission monitoring results and detailed continuous monitoring results are summarised in *Tables* 2.12 - 2.14 and provided in *Annex D7*, respectively.

# Table 2.12Summary of Thermal Oxidiser Stack Emission Monitoring in the Reporting<br/>Period

Parameters	Monitoring Results (Range in Bracket)	Limit Level
NO <sub>2</sub>	0.38 gs <sup>-1</sup>	1.58 gs <sup>-1</sup>
СО	<0.02 gs <sup>-1</sup>	0.53 gs <sup>-1</sup>
SO <sub>2</sub>	<0.01 gs <sup>-1</sup>	0.07 gs <sup>-1</sup>
Benzene	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>	3.01 x 10 <sup>-2</sup> gs <sup>-1</sup>
Vinyl chloride	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>	2.23 x 10 <sup>-3</sup> gs <sup>-1</sup>
Gas combustion temperature	943°C (932°C - 984°C)	850°C (minimum)
Exhaust gas exit temperature	1,237K (1,219K <b>-</b> 1,316K)	443K (minimum) <sup>(a)</sup>
Exhaust gas velocity	15.3 <sup>(b)</sup>	7.5 ms <sup>-1</sup> (minimum) <sup>(a)</sup>

#### Note:

(a) Level under full load condition.

(b) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring. The limit level was not applicable as the stack was not operated under full load condition.

# Table 2.13Summary of Landfill Gas Flare Stack Emission Monitoring in the Reporting<br/>Period

Parameters	Monitoring Results (Range in Bracket)	Limit Level
NO <sub>2</sub>	<0.02 gs <sup>-1</sup>	0.97 gs <sup>-1</sup>
СО	2.81 gs <sup>-1</sup>	2.43 gs <sup>-1</sup>
SO <sub>2</sub>	0.11 gs <sup>-1</sup>	0.22 gs <sup>-1</sup>
Benzene	9.9 x 10 <sup>-5</sup> gs <sup>-1</sup>	4.14 x 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl chloride	<1.4 x 10 <sup>-5</sup> gs <sup>-1</sup>	2.60 x 10 <sup>-4</sup> gs <sup>-1</sup>
Gas combustion temperature	Flare 1: 864°C (820°C - 935°C)	815°C (minimum)
	Flare 2: 853°C (820°C - 894°C)	
Exhaust gas exit temperature	Flare 1: 1,059K (1,025K – 1,115K)	923 K (minimum) <sup>(a)</sup>
	Flare 2: 1,027K (944K – 1,097K)	
Exhaust gas velocity	9.1 <sup>(b)</sup>	9.0 m s <sup>-1</sup> (minimum) <sup>(a)</sup>

#### Note:

(a) Level under full load condition.

(b) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring. The limit level was not applicable as the stack was not operated under full load condition.

# Table 2.14Summary of Landfill Gas Generator Stack Emission Monitoring in the<br/>Reporting Period

Parameters	Monitoring Results (Range in Bracket)	Limit Level
NO <sub>2</sub>	0.007 gs <sup>-1</sup>	1.91 gs <sup>-1</sup>
СО	0.046 gs <sup>-1</sup>	2.48 gs <sup>-1</sup>
SO <sub>2</sub>	0.074 gs <sup>-1</sup>	0.528 gs <sup>-1</sup>
Benzene	4 x 10-6 gs-1	2.47 x 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl chloride	<1.2 x 10 <sup>-6</sup> gs <sup>-1</sup>	1.88 x 10 <sup>-5</sup> gs <sup>-1</sup>
Exhaust gas exit temperature	838K (748K - 847K)	723K (minimum) <sup>(a)</sup>
Exhaust gas velocity	17.6 (b)	30.0 ms <sup>-1</sup> (minimum) <sup>(a)</sup>

Note:

(a) Level under full load condition.

(b) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring. The limit level was not applicable as the stack was not operated under full load condition.

Limit Levels exceedance was recorded for landfill gas flare stack emission (CO) in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex D3* were undertaken. Investigation of the Limit Levels exceedance was conducted and the investigation report is presented in *Annex D8*.

Based on the investigation conducted for the monitoring event with potential Limit Levels exceedance with the Contractor and the IEC, the landfill gas flare stack emission (CO) exceedance on 17 December 2021 was found to be Project-related. The Contractor was reminded to implement all relevant mitigation measures for the construction and operation works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor's compliance of the environmental requirements.

## 2.2 NOISE MONITORING

#### 2.2.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact noise monitoring was conducted weekly at the monitoring location (i.e. NM1) to obtain one set of 30 minutes measurement between 07:00 and 19:00 hours on normal weekdays.

The Action and Limit Levels for operational noise of the Project are provided in *Table 2.15* below.

### Table 2.15Action and Limit Levels for Operational Noise

Time	e Period	Action Level <sup>(a)</sup>	Limit Level <sup>(b)</sup>
07:00	) – 19:00 hrs on all days	When one documented complaint is	65 dB(A) at NSRs (c)
19:00	) - 23:00 hrs on all days	received from any one of the noise sensitive receivers (NSRs) or	65 dB(A) at NSRs <sup>(c)</sup>
23:00	) – 07:00 hrs on all days	75 dB(A) recorded at the monitoring station	55 dB(A) at NSRs <sup>(c)</sup>
Note	25:		
(a)	75dB(A) along and at ab	out 100m from the SENTX site boundary w	as set as the Action
	Level.		
(b)	<ul> <li>Limits specified in the GW-TM and IND-TM for construction and operational noise, respectively.</li> </ul>		
(c)	Limit Level only apply to	o operational noise without road traffic and	l construction
	activities noise.		

Noise monitoring was performed by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066) using sound level meter at the designated monitoring station NM1 (see *Figure 2.1*) in accordance with the requirements stipulated in the updated EM&A Manual. Acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. Details of the deployed equipment are provided in *Table 2.16*. Copies of the calibration certificates for the equipment are presented in *Annex E1*.

#### Table 2.16Noise Monitoring Details

Monitoring Station <sup>(1)</sup>	Location	Parameter	Frequency and Duration	Monitoring Dates	Equipment
NM1	SENTX Site	L <sub>eq (30 min)</sub>	Once per	2, 9, 14, 22, 28	Sound Level
	Boundary	measurement	week for 30	Dec 2021	Meter:
	(North)	between 07:00	mins during		B&K 2238
		and 19:00 hours	operation of		(S/N:
		on normal weekdays	the Project		2285722)
		(Monday to			Rion NL-52
		Saturday)			(S/N:
		<i>,</i> ,			00921191)
					Acoustic
					Calibrator:
					Rion NC-74
					(S/N:
					34246492)
					Rion NC-73
					(S/N:
					10655561)

#### 2.2.2 Monitoring Schedule for the Reporting Month

The schedule for noise monitoring during the reporting period is provided in *Annex C*.

#### 2.2.3 Results and Observations

A total of 5 impact noise monitoring events were scheduled during the reporting period. Results for noise monitoring are summarised in *Table 2.17*. The monitoring results and the graphical presentation of the data are provided in *Annex E2*.

#### Table 2.17Summary of Operation Noise Monitoring Results in the Reporting Period

Monitoring Station	Measured Noise Level L <sub>eq (30 min)</sub> , dB(A)			
	Average	Range	Action and Limit Level	
NM1	49.9	47.0 - 51.1	75	

Major noise sources identified during the noise monitoring included noise from operations of the SENTX and the TKO Area 137 Fill Bank, aircrafts and insects.

No Action and Limit Levels exceedance was recorded for operation noise monitoring in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex E*3.

#### 2.3 WATER QUALITY MONITORING

#### 2.3.1 Surface Water Quality Monitoring

#### Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact surface water quality monitoring was carried out at the three designated surface water discharge points (i.e. DP3, DP4 and DP6) at monthly intervals during operation/ restoration phase to ensure that the SENTX will not cause adverse water quality impact. Temporary relocation of surface water discharge point DP4 to DP4 (Future, temporary) as an interim arrangement due to site constraints and construction sequence was approved by EPD on 14 May 2019. Surface water quality monitoring was carried out at DP4 (Future, temporary) (i.e. DP4T) from the monitoring event on 16 May 2019. In addition, suspension of impact surface water quality monitoring at DP3 was approved under the Baseline Monitoring Report by EPD on 24 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

The level of Ammoniacal-nitrogen, chemical oxygen demand (COD) and suspended solids (SS) were determined by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066).

The Limit Levels of the surface water quality impact monitoring are provided in *Table 2.18*.

Parameters	Limit Level
DP4 & DP6	
Ammoniacal-nitrogen	> 7.1 mg/L
COD	> 30 mg/L
SS	> 20 mg/L

The locations of the monitoring stations for the Project are shown in *Figure 2.1*. All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the surface water quality monitoring programme. Calibration for a DO meter was carried out before measurement according to the instruction manual of the equipment model. Details of the equipment used in the impact surface water quality monitoring works are provided in *Table 2.19*. Copies of the calibration certificates for the equipment are presented in *Annex F1*.

### Table 2.19 Impact Surface Water Quality Monitoring Details

Monitoring Station	Location	Frequency	Monitoring Dates	Parameter		Equipment
DP4 (Future, temporary) DP6	Surface water discharge point DP4 Surface water discharge point DP6	Monthly	28 Dec 2021	<ul> <li>Electrical conductivity (EC)</li> <li>DO</li> <li>SS</li> <li>COD</li> <li>BOD<sub>5</sub></li> <li>TOC</li> <li>Ammoniacal- nitrogen</li> <li>Nitrate- nitrogen</li> <li>Nitrite- nitrogen</li> <li>Nitrite- nitrogen</li> <li>TKN</li> <li>TN</li> <li>Phosphate</li> <li>Sulphate</li> <li>Sulphide</li> <li>Carbonate</li> </ul>	Magnesium Nickel Manganese Chromium Cadmium Copper Lead Iron Zinc	YSI Professional DSS (S/N: 17B102764)
				• Oil & Grease		

#### Notes:

- (a) DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.
- (b) Impact surface water quality monitoring at DP3 was suspended from the monitoring event on 25 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

#### Monitoring Schedule for the Reporting Month

The schedule for surface water quality monitoring during the reporting period is provided in *Annex C*.

#### Results and Observations

One monitoring event for impact surface water quality monitoring was scheduled at all designated monitoring stations during the reporting period. However, sampling could not be carried out on 28 December 2021 due to insufficient flow. Details of impact water quality monitoring event are provided in *Annex F2*.

No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex F3*.

#### 2.3.2 Leachate Monitoring

#### Monitoring Requirements and Equipment

According to the updated EM&A Manual, continuous monitoring of leachate level and daily monitoring of effluent quality were carried out during the operation/ restoration phase.

Temperature, pH and volume of the effluent discharged from the leachate treatment plant were measured in-situ whereas the parameters as listed in *Table 2.19* were determined by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066).

The Limit Levels of the leachate monitoring are provided in *Table 2.20*.

#### Table 2.20Limit Levels for Leachate Levels and Effluent Quality

Parameters	Limit Level
Leachate Levels	
Leachate levels above the basal liner	1 m above the primary liner of the leachate containment system
Effluent Quality	
Temperature	> 43 °C
pH Value	6 - 10
Volume Discharged	>1,500 m <sup>3</sup>
Suspended Solids (SS)	> 800 mg/L
Ammoniacal-nitrogen	> 100 mg/L
Nitrite-nitrogen	> 100 mg/L
Phosphate	> 25 mg/L
Sulphate	> 900 mg/L
Nitrate-nitrogen	> 100 mg/L
Biochemical Oxygen Demand (BOD)	> 800 mg/L
Chemical Oxygen Demand (COD)	> 2,000 mg/L
Oil & Grease	> 20 mg/L

Parameters	Limit Level
Boron	> 7,000 µg/L
Iron	> 7.5 mg/L
Cadmium	> 1 µg/L
Chromium	> 400 µg/L
Copper	> 1,000 µg/L
Nickel	> 800 µg/L
Zinc	> 800 µg/L

All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the leachate quality monitoring programme. Details of the equipment used are provided in *Table 2.21*. Copies of the calibration certificates for the equipment are presented in *Annex F4*.

Location	Frequency	Parameter	Monitoring Dates	Equipment
Leachate levels above the basal liner	Continuous	Leachate Levels	1 - 31 Dec 2021	Pairs of pressure transducers
Effluent	Daily for the first 3	On-site	1 – 31 Dec 2021	Lutron WA-
discharged	months upon full	Measurements:		2017SD
from LTP	operation of the LTP at	Volume		(S/N:
	wet season (Apr to	• pH		T.016811)
	Sep) and dry season	Temperature		
	(Oct to Mar),	Laboratory analysis:		
	respectively and	Suspended Solids		
	reduce to monthly	• COD		
	thereafter subject to the	• BOD <sub>5</sub>		
	monitoring results of	• TOC		
	the first 3 months for	Ammoniacal-		
	each season and	nitrogen		
	1, 1, 1, 1	0		

•

•

•

•

٠

•

•

•

• Nitrate-nitrogen

• Nitrite-nitrogen

• Total Nitrogen • Sulphate Phosphate

Oil & Grease

Magnesium

Iron •

Zinc •

Copper

Nickel

Boron •

Chromium

Cadmium

 Alkalinity • Chloride Calcium Potassium

#### *Table* 2.21 Leachate Levels and Effluent Quality Monitoring Details

agreement with the

and IC. (a)

EIAO Authority, IEC

Note:

(a) Reduction of monitoring frequency will be subject to the monitoring results to demonstrate environmentally acceptable performance.

Monitoring Schedule for the Reporting Month

The schedule for leachate monitoring during the reporting period is provided in Annex C.

#### **Results and Observations**

The leachate levels and effluent quality monitoring results are summarised in Table 2.22 and Table 2.23, respectively. The detailed monitoring results are provided in Annex F5 and Annex F6, respectively.

#### Table 2.22Summary of Leachate Levels in the Reporting Period

Monitoring Location	Average Leachate Head Levels (cm) (Range in Bracket)	Limit Level (cm)			
Pump Station No. 1X (Cell	1X)				
Meter No. X-1	65 (44 - 111)	> 178			
Meter No. X-2	78 (10 – 111)				
Average	71 (48 - 101)				
Pump Station No. 2X (Cell	Pump Station No. 2X (Cell 2X)				
Meter No. X-1	81 (70 – 88)	> 180			
Meter No. X-2	82 (73 – 88)				
Average	81 (72 - 87)				
Pump Station No. 3X (Cell	3X)				
Meter No. X-1	89 (79 – 99)	> 175			
Meter No. X-2	89 (79 – 99)				
Average	89 (79 – 89)				

Table 2.23Summary of Effluent Quality Monitoring Results in the Reporting Period

Parameters	Average Monitoring Results (Range in Bracket)	Limit Level
Effluent Discharged from LTP		
Temperature	25.7°C (20.0°C - 30.6°C)	> 43 °C
pH Value	8.4 (8.3 - 8.5)	6 – 10
Volume Discharged	1,025m³ (473m³ - 1,435m³)	>1,500 m <sup>3</sup>
Suspended Solids (SS)	20.0mg/L (10.1mg/L - 33.8mg/L)	> 800 mg/L
Ammoniacal-nitrogen	0.34mg/L (0.15mg/L – 0.75mg/L)	>100 mg/L
Nitrite-nitrogen	0.24mg/L (0.14mg/L – 0.70mg/L)	> 100 mg/L
Phosphate	10.0mg/L (7.7mg/L – 11.5mg/L)	> 25 mg/L
Sulphate	68mg/L (57mg/L – 92mg/L)	> 900 mg/L
Nitrate-nitrogen	62.0mg/L (42.4mg/L – 80.3mg/L)	> 100 mg/L
BOD	10mg/L (6mg/L – 24mg/L)	> 800 mg/L
COD	987mg/L (785mg/L – 1,430mg/L)	> 2,000 mg/L
Oil & Grease	<5mg/L (<5mg/L - <5mg/L)	> 20 mg/L
Boron	5,143μg/L (4,530μg/L – 6,050μg/L)	> 7,000 µg/L
Iron	1.44mg/L (1.21mg/L – 1.74mg/L)	> 7.5 mg/L
Cadmium	<1.0μg/L (<1.0μg/L - <1.0μg/L)	>1 µg/L
Chromium	129μg/L (112μg/L – 146μg/L)	> 400 µg/L
Copper	43μg/L (24μg/L – 61μg/L)	> 1,000 µg/L
Nickel	114μg/L (98μg/L – 124μg/L)	> 800 µg/L
Zinc	57μg/L (40μg/L – 100μg/L)	> 800 µg/L

All the leachate levels and effluent quality monitoring results were below the Limit Levels in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex F*3.

#### 2.3.3 Groundwater Monitoring

#### Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project with incorporation of the proposed updates under the Amendment Summary approved by EPD on 15 June 2020, groundwater monitoring was carried out at 14 perimeter groundwater monitoring wells (including 5 up-gradient wells and 9 downgradient wells) (i.e. MWX-1 to MWX-14) to monitor the groundwater quality and level of the perimeter groundwater monitoring wells at monthly interval.

The Limit Levels for groundwater quality is provided in *Table 2.24* below.

Location	Limit Levels		
	Ammoniacal-nitrogen (mg L-1)	COD (mg L-1)	
MWX-1	5.00	30	
MWX-2	5.00	30	
MWX-3	5.00	30	
MWX-4	7.63	36	
MWX-5	5.00	30	
MWX-6	5.00	46	
MWX-7	6.55	36	
MWX-8	15.85	50	
MWX-9	7.30	71	
MWX-10	5.00	30	
MWX-11	5.00	30	
MWX-12	5.00	30	
MWX-13	5.00	30	
MWX-14	5.00	30	

#### Table 2.24Limit Levels for Groundwater Quality

A bladder pump with Teflon sampling tube and adjustable discharge rates was used for purging and taking of groundwater sample from the monitoring wells. Filtered groundwater samples was collected by connecting a disposable in-line filter system to the tubing of the sampling pump, prior to storage and analysis by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066).

A portable dip meter with 5mm accuracy was used for measurement of groundwater level at each well. The dip meter have an audio indicator of the water level and was checked before use.

The measurements of pH and electrical conductivity (EC) were undertaken *in situ*. *In situ* monitoring instruments in compliance with the specifications listed under Section 4.3.2 of the updated EM&A Manual were used to undertake the groundwater quality monitoring for the Project.

Details of the equipment used and the monitoring locations are summarised in *Table 2.25* and illustrated in *Figure 2.1*, respectively. Copies of the calibration certificates for the equipment are presented in *Annex F7*.

#### Table 2.25Groundwater Monitoring Details

Monitoring Location	Frequency	Param	leter	Monitoring Dates	Equipment
All groundwater monitoring wells (MWX-1 to MWX-14)	Monthly	<ul> <li>Water level</li> <li>pH</li> <li>EC</li> <li>COD</li> <li>BOD5</li> <li>TOC</li> <li>Ammoniacal-nitrogen</li> <li>Nitrate-nitrogen</li> <li>Nitrite-nitrogen</li> <li>TKN</li> <li>TKN</li> <li>Sulphate</li> <li>Sulphide</li> <li>Carbonate</li> <li>Bicarbonate</li> <li>Phosphate</li> </ul>	<ul> <li>Chloride</li> <li>Sodium</li> <li>Potassium</li> <li>Calcium</li> <li>Magnesium</li> <li>Nickel</li> <li>Manganese</li> <li>Chromium</li> <li>Cadmium</li> <li>Copper</li> <li>Lead</li> <li>Iron</li> <li>Zinc</li> <li>Mercury</li> <li>Boron</li> </ul>	7-8 Dec 2021	YSI Professional DSS (S/N: 17B102764)

Monitoring Schedule for the Reporting Month

The schedule for surface water quality monitoring during the reporting period is provided in *Annex C*.

#### Results and Observations

The groundwater quality monitoring results and detailed monitoring results are summarised in *Table 2.26* and provided in *Annex F8*, respectively.

Location	Ammoniacal-nitroge	n (mg L-1)	COD (mg L <sup>-1</sup> )		
	<b>Monitoring Results</b>	Limit Levels	<b>Monitoring Results</b>	Limit Levels	
MWX-1	0.29	5.00	11	30	
MWX-2	0.02	5.00	3	30	
MWX-3	1.33	5.00	19	30	
MWX-4	6.79	7.63	36	36	
MWX-5	1.95	5.00	28	30	
MWX-6	3.52	5.00	56	46	
MWX-7	5.42	6.55	23	36	
MWX-8	12.50	15.85	44	50	
MWX-9	5.34	7.30	20	71	
MWX-10	0.03	5.00	6	30	
MWX-11	0.02	5.00	4	30	

5.00

5.00

5.00

Limit Levels exceedance was recorded for groundwater monitoring in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex F3* were undertaken. Investigation of the Limit Levels exceedance was conducted and the investigation report is presented in *Annex F9*.

<2

<2

<2

30

30

30

Based on the investigation conducted for the monitoring event with potential Limit Levels exceedance with the Contractor and the IEC, the groundwater quality (COD) exceedance at MWX-6 on 8 December 2021 was considered non Project-related. The Contractor was reminded to implement all relevant mitigation measures for the construction and operation works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor's compliance of the environmental requirements.

#### 2.4 LANDFILL GAS MONITORING

MWX-12

**MWX-13** 

MWX-14

< 0.01

0.04

< 0.01

#### 2.4.1 Monitoring Requirements

According to the updated EM&A Manual of the Project, landfill gas monitoring was carried out at the perimeter of the waste boundary (monitoring wells), area between the SENTX Site boundary and the waste boundary (surface emission), occupied on-site building, service voids, utilities pit and manholes in the vicinity of the SENTX (build-up of landfill gas) during the operation/restoration phase.

The Limit Levels for landfill gas monitoring is provided in *Table 2.27* below.

Parameters Monitoring Location		Limit Level (% (v/v))			
Perimeter Landfill Gas Monitoring Wells (a)					
Methane & Carbon Dioxide		Methane	Carbon Dioxide		
	LFG1	1.0	2.2		
	LFG2	1.0	4.2		
	LFG3	1.0	6.3		
	LFG4	1.0	7.0		
	LFG5	1.0	3.4		
	LFG6	1.0	9.1		
	LFG7	1.0	1.5		
	LFG8	1.0	1.7		
	LFG9	2.5	1.7		
	LFG10	1.0	1.6		
	LFG11	3.0	2.0		
	LFG12	13.2	1.5		
	LFG13	22.5	2.7		
	LFG14	1.0	1.6		
	LFG15	18.2	2.0		
	LFG16	1.0	1.7		
	LFG17	10.5	2.1		
	LFG18	2.3	1.9		
	LFG19	6.3	3.1		
	LFG20	1.0	4.2		
	LFG21	1.0	4.3		
	LFG22	1.0	3.9		
	LFG23	1.0	10.3		
	LFG24	1.0	4.0		
	GP1	1.0	8.5		
	GP2 (shallow)	1.0	11.4		
	GP2 (deep)	1.0	10.4		
	GP3 (shallow)	1.0	3.9		
	GP3 (deep)	1.0	1.9		
	GP4 (shallow)	1.0	2.3		
	GP4 (deep)	1.0	5.6		
	GP5 (shallow)	1.0	9.5		
	GP5 (deep)	1.0	7.5		
	GP6	1.0	7.8		
	GP7	1.0	4.5		
	GP12	1.0	2.3		
	GP15	1.0	2.2		
	P7	1.0	2.5		
	P8	1.0	1.7		
	P9	1.0	2.7		

#### Service Voids, Utilities Pits and Manholes

Methane (or flammable gas) Service voids, utilities 1% by volume pits and manholes

Parameters	Monitoring Location	Limit Level (% (v/v))
Permanent Gas Monitoring	System	
Methane (or flammable gas)	Permanent Gas	1% by volume (20% LEL)
	Monitoring System	
Notes:		


(a) Provisional Limit Levels established based on the pre-operation phase baseline and additional landfill gas monitoring results in the Pre-operation Baseline Monitoring Report.

Gas analysers in compliance with the specifications listed under Section 5.4.1 of the updated EM&A Manual were used to monitor the gas parameters at the landfill gas monitoring wells, service voids, utilities pits and manholes. The gas analyser was calibrated by a laboratory accredited under HOKLAS at yearly intervals and checked before use to ensure the validity and accuracy of the results. A portable dip meter was used to monitor the water level in the monitoring wells.

Permanent gas monitoring systems with pre-set alarm levels for methane at 20% lower explosive limit (LEL, equivalent to 1% methane gas (v/v)) were installed and operated in all occupied on-site buildings at SENTX. A central control panel is equipped to alert site personnel when the gas concentration at any detector reaches the alarm level.

The equipment used in the landfill gas monitoring programme is summarised in *Table 2.28*. The landfill gas monitoring locations for perimeter landfill gas monitoring wells and service voids, utilities and manholes along the Site boundary and within the SENTX site are illustrated in *Figure 2.3* and *Annex G1*, respectively. Copies of the calibration certificates for the equipment are presented in *Annex G2*.

Monitoring Location	Frequency	Parameter	Monitoring Dates	Equipment
Perimeter landfill gas monitoring wells (LFG1 to LFG24, P7 to P9, GP1 to GP7, GP12 and GP15)	Monthly	<ul> <li>Methane</li> <li>Carbon dioxide</li> <li>Oxygen</li> <li>Atmospheric pressure</li> </ul>	14 Dec 2021	GA5000 (S/N: G507306)
Service voids, utilities and manholes along the Site boundary and within the SENTX Site (UU1 to UU28)	Monthly	<ul><li>Methane</li><li>Carbon dioxide</li><li>Oxygen</li></ul>	16 Dec 2021	GA5000 (S/N: G507306)
Permanent gas monitoring system in all occupied on-site buildings	Continuous	• Methane (or flammable gas) by permanent gas monitoring system	1 – 31 Dec 2021	Permanent gas monitoring system

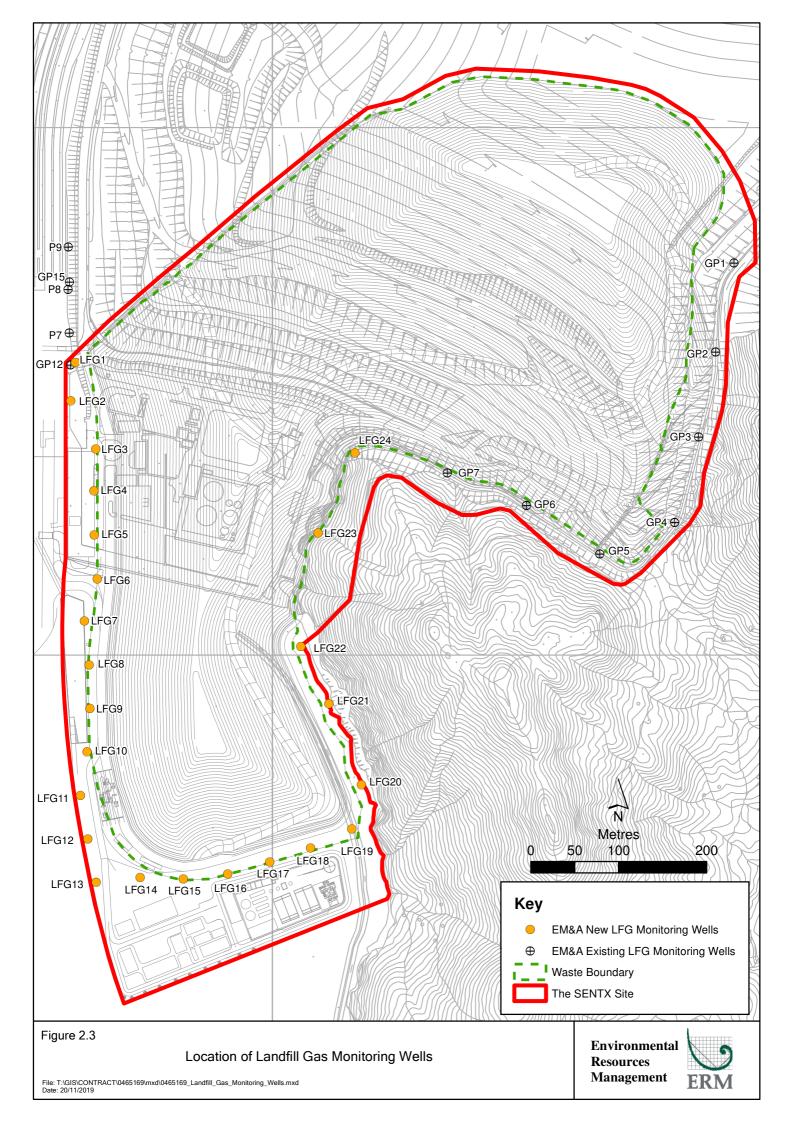

Monitoring Schedule for the Reporting Month

The schedule for dust monitoring during the reporting period is provided in *Annex C*.

Results and Observations

The landfill gas monitoring results are summarised and provided in *Tables* 2.29 - 2.30 and Annex G3, respectively.

# Table 2.29Summary of Landfill Gas Monitoring Results at Perimeter LFG Monitoring<br/>Wells in the Reporting Period

Location	Methane (% (v	/v))	Carbon Dioxide (% (v/v))		
	Monitoring Results	Limit Levels <sup>(a)</sup>	Monitoring Results	Limit Levels <sup>(a)</sup>	
LFG1	0.0	1.0	0.1	2.2	
LFG2	0.0	1.0	0.1	4.2	
LFG3	0.0	1.0	0.9	6.3	
LFG4	0.0	1.0	0.0	7.0	
LFG5	0.0	1.0	0.2	3.4	
LFG6	0.0	1.0	0.1	9.1	
LFG7	0.0	1.0	0.0	1.5	
LFG8	0.0	1.0	0.0	1.7	
LFG9	0.0	2.5	0.1	1.7	
LFG10	0.0	1.0	0.0	1.6	
LFG11	0.0	3.0	0.1	2.0	
LFG12	0.0	13.2	0.0	1.5	
LFG13	19.6	22.5	0.0	2.7	
LFG14	0.0	1.0	0.0	1.6	
LFG15	1.8	18.2	0.4	2.0	
LFG16	0.0	1.0	0.1	1.7	
LFG17	0.0	10.5	0.2	2.1	
LFG18	0.0	2.3	0.1	1.9	
LFG19	0.0	6.3	0.1	3.1	
LFG20	0.0	1.0	1.1	4.2	
LFG21	0.0	1.0	2.0	4.3	
LFG22	0.0	1.0	1.0	3.9	
LFG23	0.0	1.0	2.1	10.3	
LFG24	0.0	1.0	0.9	4.0	
GP1	0.2	1.0	5.2	8.5	
GP2 (shallow)	0.5	1.0	0.3	11.4	
GP2 (deep)	0.2	1.0	0.1	10.4	
GP3 (shallow)	0.3	1.0	2.5	3.9	
GP3 (deep)	0.1	1.0	0.2	1.9	
GP4 (shallow)	0.6	1.0	0.7	2.3	
GP4 (deep)	0.7	1.0	1.7	5.6	
GP5 (shallow)	0.1	1.0	5.4	9.5	
GP5 (deep)	0.1	1.0	0.3	7.5	
GP6	0.0	1.0	5.6	7.8	
GP7	0.0	1.0	0.1	4.5	
GP12	0.0	1.0	0.0	2.3	
GP15	0.0	1.0	0.0	2.2	
P7	0.0	1.0	0.0	2.5	
P8	0.0	1.0	0.0	1.7	
Р9	0.0	1.0	0.0	2.7	

ENVIRONMENTAL RESOURCES MANAGEMENT

(a) Provisional Limit Levels established based on the pre-operation phase baseline and additional landfill gas monitoring results in the Pre-operation Baseline Monitoring Report.

Table 2.30Summary of Landfill Gas Monitoring Results at Service Voids, Utilities Pits<br/>and Manholes in the Reporting Period

Location	ocation Methane (% (v/v))				
	Monitoring Results	Limit Levels			
UU01	0.1	1.0			
UU02	0.0	1.0			
UU03	0.0	1.0			
UU04	0.1	1.0			
UU05	0.0	1.0			
UU06	0.0	1.0			
UU07	0.1	1.0			
UU08	0.0	1.0			
UU09	0.2	1.0			
UU10	0.1	1.0			
UU11	Inaccessible due to on-going construction work	1.0			
UU12	Inaccessible due to on-going construction work	1.0			
UU13	Inaccessible due to on-going construction work	1.0			
UU14	Inaccessible due to on-going construction work	1.0			
UU15	0.1	1.0			
UU16	0.1	1.0			
UU17	0.3	1.0			
UU18	0.1	1.0			
UU19	0.0	1.0			
UU20	0.1	1.0			
UU21	0.0	1.0			
UU22	0.0	1.0			
UU23	0.0	1.0			
UU24	0.0	1.0			
UU25	0.0	1.0			
UU26	0.0	1.0			
UU27	0.0	1.0			
UU28	0.0	1.0			

The alarm of the permanent gas monitoring systems with pre-set levels for methane at 20% lower explosive limit (LEL, equivalent to 1% methane gas (v/v)) was not triggered at all occupied on-site buildings at SENTX in December 2021.

All the landfill gas monitoring results were below the Limit Levels in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex G4*.

## 2.5 LANDSCAPE AND VISUAL MONITORING

### 2.5.1 Monitoring Requirements

According to the updated EM&A Manual of the Project, the monthly landscape and visual audit was conducted on 22 December 2021 to monitor the implementation of the landscape and visual mitigation measures during operation/ restoration phase. All relevant environmental mitigation measures listed in the approved EIA Report and the updated EM&A Manual and their implementation status are summarised in *Annex B*.

### 2.5.2 Results and Observations

The Contractor has implemented environmental mitigation measures as stated in the approved EIA Report and the EM&A Manual.

Regarding the landscape and visual audit, the Contractor was reminded to maintain the advance screen planting works as soon as possible to ensure effective screening of views of project works from the High Junk Peak Trail. The Contractor shall consider the mitigation measures during the design phase, including the preparation of the Construction Drawings and Detailed Landscape Design Drawings.

### 2.6 EM&A SITE INSPECTION

Site inspections were carried out on a weekly basis with the Contractor, IEC and ER to monitor the implementation of proper environmental pollution control and mitigation measures under the Project. In the reporting period, 5 site inspections were carried out on 2, 9, 16, 23 and 30 December 2021.

Key observations during the site inspections are summarised in Table 2.31.

# Table 2.31Key Observations Identified during the Site Inspection in this Reporting<br/>Month

Inspection Date	Environmental Observations and Recommendations
2 December 2021	• The Contractor shall clean up the oil spillage at sediment trap and handle the clean-up materials as chemical waste.
	• The Contractor shall trim the climbing plants around the transplanted trees near DP6 regularly.
9 December 2021	• The Contractor shall provide drip trays for the chemicals stored near EPD building, diesel fuel tank and at Cell 1X slope.
	• The Contractor shall provide drip trays for the chemicals stored near EPD building, diesel fuel tank and at Cell 1X slope.
16 December 2021	• The Contractor shall replace the faded NRMM labels displayed on the excavators near Cell 4X and EPD building.
	• The Contractor shall remove the general refuse accumulated near town gas plant and at the sediment trap and dispose of the waste regularly.
23 December 2021	• The Contractor shall replace the faded NRMM label displayed on the excavator near Cell 4X.
	• The Contractor shall remove the general refuse accumulated near water services house and dispose of the waste regularly.
	• The Contractor shall cover/ remove the stockpile of dusty materials near EPD building to minimise dust impact.

Inspection Date	Environmental Observations and Recommendations		
30 December 2021	• The Contractor shall clean up the oil spillage at the generators		
	near GVL building and handle the clean-up materials as chemical		
	waste.		
	The Contractor shall remove the general refuse accumulated in		
	the refuse skip near LTP regularly to minimise odour and pest		
	issues.		
	The Contractor shall remove the stagnant water accumulated at		
	the channel near sump house 3 and spray larvicides for mosquito		
	control, if necessary.		

The Contractor has rectified all observations identified during environmental site inspections in the reporting period. Key environmental deficiencies identified and the corresponding rectification actions are presented in *Table* 2.32.

# Table 2.32Summary of Environmental Deficiencies Identified and Corresponding<br/>Rectification Actions

Deficiencies	Rectifications Implemented	Proposed Additional Control Measures
Surface Water		
Intercepting channels & drainage system	• Reviewed drainage plan.	<ul> <li>Addition of channels.</li> <li>Expedite the construction of permanent sediment trap and discharge culverts.</li> </ul>
DP channels (design & regular silt removal)	<ul> <li>Carried out regular maintenance and cleaning of channels.</li> <li>DP4 channel: Area near the channel was paved with concrete and a bund was built.</li> <li>DP6 channel: Gravel piles on the channel were covered with concrete which serve as blocks for running water and to divide the channel into several sections. A pump was placed in the water zone in the upstream section to pump water to the Wetsep for treatment prior to the discharge to the last section before the weir plate.</li> <li>DP6: Pipes through the gravel piles between different channel sections were covered with geotextiles to block debris and silt.</li> </ul>	N.A.
Stockpiles & exposed soil	• Installed silt fencing near surface water channel along DP6 channel.	<ul> <li>Improve soil covering.</li> <li>Compaction and cover for stockpiles and soil slopes.</li> </ul>

Deficiencies		-		Proposed Additional Control Measures	
Wetsep (treatment	٠	Reviewed Wetsep capacity.	•	Install additional	
capacity & number)	•	Chemicals dosage of the Wetsep was increased to enhance the efficiency.		Wetsep.	
Backflow / ponding	•	Raised with EPD (LDG) and CEDD.	N.A.		
during heavy rainfall					

### 2.7 WASTE MANAGEMENT STATUS

The Contractor has registered as chemical waste producer under the Contract. Sufficient numbers of receptacles were available for general refuse collection and sorting.

As informed by the Contractor, waste generated during this reporting period include mainly inert C&D materials. Reference has been made to the waste flow table prepared by the Contractor. The quantities of different types of wastes and imported fill materials are summarised in *Table 2.33*.

## Table 2.33Quantities of Different Waste Generated and Imported Fill Materials

Month/ Year	Inert C&D Materials <sup>(a)</sup> (in '000m <sup>3</sup> )		ted Fill 0kg) <sup>(b)</sup>	Inert Construction Waste Re- used	Non-inert Construction Waste <sup>(c)</sup> (in '000m <sup>3</sup> )	Recyclable Materials <sup>(d)</sup> (in '000kg)	Chemical Wastes (in '000kg)
		Rock	Soil	(in '000m³)			
1 - 31	0.412	0	2043.810	0	0.058	11.660	0.800
Dec 2021	Dec 2021						
Notes:							
. ,							

(b) Imported fill refers to materials generated from other project for on-site reuse.

(c) Non-inert construction wastes include general refuse disposed at landfill. Density assumption: 0.9 (kg/L) for general refuse.

(d) Recyclable materials include metals, paper, cardboard, plastics and others.

### 2.8 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

A summary of the Environmental Mitigation Implementation Schedule is presented in *Annex B*. The necessary mitigation measures were implemented properly for the Project.

# 2.9 SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANCE LIMIT

The operation/ restoration phase noise and landfill gas monitoring results complied with the Action and Limit Levels in the reporting period. One exceedance of the Limit Level for TSP and one exceedance of the Limit Level for landfill gas flare stack emission (CO) were recorded for air quality impact monitoring in the reporting period. The TSP exceedance at AM4 on 13

December 2021 was considered non Project-related upon further investigation. The landfill gas flare stack emission (CO) exceedance on 17 December 2021 was found to be Project-related. One exceedance of the Limit Level for groundwater (COD) was recorded for water quality impact monitoring in the reporting period. The groundwater (COD) exceedance at MWX-6 on 8 December 2021 was considered non Project-related upon further investigation.

Cumulative statistics on exceedances is provided in Annex H.

## 2.10 SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Statistics on complaints, notifications of summons, successful prosecutions are summarised in *Annex H*.

## 3 FUTURE KEY ISSUES

### 3.1 CONSTRUCTION PROGRAMME FOR THE COMING MONTH

As informed by the Contractor, the major works for the Project in January 2022 will be:

- Excavation and removal of unsuitable fill materials;
- Import materials for Cell 4X;
- Construction of Cell 4X formation;
- Liner works at Cell 4X;
- Construction of perimeter bund along the West side of Cell 4X;
- Defects rectification for waste reception area, including weighbridge, vehicle washing facilities, wheel wash bay and guard house;
- Defects rectification for infrastructure buildings;
- Defects rectification for pavement works at Part X1 area;
- Defects rectification for surface water channels along the road pavement;
- Installation of the remaining LFG and leachate HDPE pipes at Cell 3X and Cell 4X;
- Construction of MSE wall; and
- Landscape work.

### 3.2 KEY ISSUES FOR THE COMING MONTH

Potential environmental impacts arising from the above upcoming construction activities in the next reporting period of January 2022 are mainly associated with dust emission from the exposed area and loading and unloading operation of dusty materials. The ET will keep track on the construction and operation works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

### 3.3 MONITORING SCHEDULE FOR THE COMING MONTH

The tentative schedule for environmental monitoring in January 2022 are provided in *Annex I*.

#### CONCLUSION AND RECOMMENDATION

4

This EM&A Report presents the findings of the EM&A activities undertaken during the period from 1 to 31 December 2021 in accordance with the updated EM&A Manual and the requirements of the Environmental Permit (*EP*-308/2008/B).

Air quality (24-hour TSP, odour, thermal oxidiser, landfill gas flare and landfill gas generator stack emission), noise, water quality (surface water, leachate and groundwater) and landfill gas monitoring were carried out in the reporting period. Results for noise and landfill gas monitoring complied with the Action and Limit Levels in the reporting period. One exceedance of the Limit Level for TSP, one exceedance of the Limit Level for landfill gas flare stack emission (CO) and one exceedance of the Limit Level for groundwater (COD) were recorded in the reporting period.

Environmental site inspections were carried out during the reporting period. Recommendations on remedial actions were given to the Contractor for the deficiencies identified during the site inspections.


There were no complaints, notification of summons or prosecution recorded in the reporting period.

The ET will keep track on the construction and operation/restoration works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Annex A

# Work Programme

<b># W</b>	/BS Path Activity Activity Name	Dur Start Finish Total Predecessor Details Successor Details Float	2018 2021 2023 2023 2023 2023 2023 2023 2023
336 337		Float	Q2 Q3 Q4 Q1 Q2 Q3
338 339			
340 341 342			
342 343 344 345			
345 346 347			
348 349			
350 351			
352 353	SA2.5 Construction (Initial Works) SA2.5.02 Advance Works & Site Establishment SA2.5.02.01 Site Establishment & Mobilization	1153       12-Apr-18       07-Jun-21       705         1148       12-Apr-18       02-Jun-21       35         222       42-Apr-14       40-Mar 40       200	
355 355 356	SA2.3.02.01         Site Establishment & Mobilization           5.02.01         52-1000         Site Mobilization for Parts X1 & X2           5.02.01         52-1100         Site Mobilization for Parts X3, X4 & X5	333         12-Apr-18         10-Mar-19         820         Control           30         31-Dec-18         29-Jan-19         820         11-1100: FS, 11-1200: FS         52-1300: FS, M 3. 1: FS, M 3. 2: FS           30         12-Apr-18         11-May-18         1083         11-1300: FS, 11-1400: FS, 11-1500: FS         52-1300: FS, M 3. 1: FF	
357 358	5.02.0152-1200Temporary Office for Employer / ER / IC5.02.0152-1300Hoarding and Fencing Works	60         10-Oct-18         08-Dec-18         0         23-1300: FS         11-1700: SS, M 3. 1: FS           40         30-Jan-19         10-Mar-19         820         52-1000: FS, 52-1100: FS         32-1500: FS, M10. 1: FS -26, M10. 2: F	FS -13, M10. 3: FS
359 360	SA2.5.02.02     Site Survey & Investigation Works for Parts X1 & X2       5.02.02     52-1400     Condition Survey	50         31-Dec-18         18-Feb-19         840         11-1100: FS, 11-1200: FS         52-1600: FS	
361 362	5.02.02     52-1500     Topographic Survey       5.02.02     52-1600     Site inspection, Review of Condition Survey Report	20         31-Dec-18         19-Jan-19         845         11-1100: FS, 11-1200: FS         52-1600: FS           25         25-Jan-19         18-Feb-19         840         52-1500: FS, 52-1400: FS         32-1500: FS	
363 364 365	SA2.5.02.03       Site Survey & Investigation Works for Parts X3, X4 & X5         5.02.03       52-1700       Condition Survey         5.02.03       52-1800       Topographic Survey	50         12-Apr-18         31-May-18         1103         Image: Constraint of the state of the stat	
366 367	5.02.03       52-1900       Site inspection, Review of Condition Survey Report         SA2.5.02.04       Environmental Monitoring	25       07-May-18       31-May-18       1103       52-1700: FS, 52-1800: FS       32-1500: FS         975       02-Oct-18       02-Jun-21       35       4	
368 369	5.02.04       52-2000       Installation of Monitoring Stations & Wells (GP & GW)         5.02.04       52-2100       Installation of Monitoring Stations & Wells (GP & GW) on Buttress Wall         5.02.04       52-2200       Conduct Baseline Monitoring for Construction (one month)	120         02-Oct-18         29-Jan-19         0         23-1600: FS         52-2200: SS 60           120         02-Oct-18         29-Jan-19         0         23-1600: FS         52-2200: SS 60           30         01-Dec-18         30-Dec-18         0         52-2200: SS 60, 52-2100: SS 60         11-1100: FS	
370	5.02.04       52-2200       Conduct Baseline Monitoring for Operation (one year)         SA2.5.03       Civil Engineering Works	30       01-Dec-18       30-Dec-18       0       52-2000: SS 60, 52-2100: SS 60       11-1100: FS         365       03-Jun-20       02-Jun-21       35       32-1500: FS -400, 53-4500: FS       12-1400: FS         748       13-Jan-19       29-Jan-21       834       64       14-1400: FS	
373 374	SA2.5.03.0         Buttress Wall           5.03.0         53-1000         Section adj. SENT	475         02-Mar-19         18-Jun-20         83         6           300         13-Apr-19         06-Feb-20         96         11-1300: FS, 23-2500: FS, 53-3000: FS, 31-1200: FS, 53-1100: FS, 53-1300: FS, 53-3100: FS, 53-3100: FS, 53-1300: FS, 53-3100: FS, 53-1300: FS, 53-1300: FS, 53-3100: FS, 53-1300: FS, 5	FS, M 3. 5: FS -150, M 3.
375 376	5.03.0         53-1100         Diversion of SENT Landfill Gas Pipe           5.03.0         53-1200         Section at Cell 4	45         07-Feb-20         22-Mar-20         96         23-2500: FS, 53-1000: FS         53-1300: FS, 54-4000: FS, M 3. 3: FS           400         02-Mar-19         04-Apr-20         83         11-1300: FS, 23-2500: FS, 53-3000: FS, 11-1400: FS         53-1300: FS, 53-3100: FS, M 3. 7: FS, M 3.	
377	5.03.0 53-1300 Install Landfill Gas Pipe on Buttress Wall	75         05-Apr-20         18-Jun-20         83         41-1500: FS, 53-1100: FS, 53-1200: FS, 53-1000: FS         54-4000: FS	
378 379	SA2.5.03.1         Landfill Cell 1           5.03.1         53-1400         Earth bund (Eastern)	503         13-Jan-19         29-May-20         214         90         90         04-Aug-19         01-Nov-19         9         11-1100: FS, 23-2500: FS, 53-4200: FS, 53-2800: FS         53-2000: FS, 53-2300: FS, 53-3400: FS           63-1100: FS, 63-1200: FS, 63-1200: FS, 63-1300: FS         9         11-1100: FS, 23-2500: FS, 53-4200: FS, 53-2800: FS         53-2000: FS, 53-2300: FS, 53-3400: FS	
380	5.03.1 53-1500 Earth bund (Southern)	90         26-Apr-19         24-Jul-19         314         11-1100: FS, 23-2500: FS, 53-2800: FS         53-2000: FS, 53-2200: FS, 53-2300: FS           53-3700: FS, 53-3800: FS         53-3700: FS, 53-3800: FS         53-3700: FS, 53-3800: FS	
381 382	5.03.1         53-1600         Earth bund (Western)           5.03.1         53-1700         Intercell bund (Cell 1/2)	90       13-Jan-19       12-Apr-19       417       11-1100: FS, 23-2500: FS       53-1900: FS, 53-2000: FS, 53-2200: FS         75       13-Jan-19       28-Mar-19       432       11-1100: FS, 23-2500: FS       53-2000: FS	FS, 53-3800: FS
383	5.03.1         53-1900         Pump Station (PS#1X)	90         13-Jan-19         12-Apr-19         217         11-1100: FS, 23-2500: FS, 31-1300: FS         53-1900: FS, 63-1100: FS, 63-1200: FS           45         13-Apr-19         27-May-19         507         53-1800: FS, 53-1600: FS         53-2100: FS, 53-2200: FS	
385	5.03.1         53-2000         Lining Works	135         02-Nov-19*         15-Mar-20         214         41-1500: FS, 53-1400: FS, 53-1500: FS, 53-1600: FS, 53-2100: FS, 53-2100: FS         53-2100: FS	
386 387	5.03.1     53-2100     Protective Stone Laying & Leachate Collection Pipe       5.03.1     53-2200     Install Leachate Force Main	75         16-Mar-20         29-May-20         214         53-2000: FS, 41-1500: FS, 53-1900: FS         32-1500: FS, 54-2800: FS, M 4. 3: FS           75         25-Jul-19         07-Oct-19         449         53-1500: FS, 53-1600: FS, 41-1500: FS, 53-1900: FS         54-2800: FS	
388 389	5.03.1       53-2300       Install Landfill Gas Pipe on earth bund         5.03.1       53-2400       Leachate Pipe Connection (Cell 1 to LTP)	55         02-Nov-19         26-Dec-19         258         41-1500: FS, 53-1400: FS, 53-1500: FS         54-4000: FS           30         09-Mar-20         07-Apr-20         266         23-2500: FS, 54-1000: SS         54-2800: FS	
390 391	SA2.5.03.4 Landfill Cell 4         5.03.4       53-2500       Provide Temporary Leachate Pipe on Cell 4 Area         SA2.5.03.5       Drainage - Surface Run-Off	30         09-Jul-20         07-Aug-20         144         23-2500: FS, 63-2600: SS -90         54-2800: FS, M 3. 3: FS           740         16-Jan-19         24-Jan-21         839         54-2800: FS, M 3. 3: FS	
393 394	5.03.5         53-2600         Construct Cut-Off Channel 12A           5.03.5         53-2700         Connect Cut-Off Channel 12A to DP6	60         16-Jan-19         16-Mar-19         9         11-1100: FS, 23-2800: FS         53-2700: FS           20         17-Mar-19         05-Apr-19         9         53-2600: FS, 31-1400: FS, 23-1900: FS         53-2800: FS	
395 396	5.03.5       53-2800       Diversion from Existing Trapezoidal Channel into Channel 12A         5.03.5       53-2900       Removal of Existing Trapezoidal Channel along Eastern Bund	20         06-Apr-19         25-Apr-19         9         53-2700: FS         53-1400: FS, 53-1500: FS, 53-2900: FS           30         26-Apr-19         25-May-19         9         53-2800: FS         53-4200: FS	FS, 63-100: FS,
397 398	5.03.5       53-2900       Reinoval of Existing Trapezoldal Channel along Eastern Bund         5.03.5       53-3000       Cut-Off Channel C4 Diversion to Cut-Off Channel 17-2         5.03.5       53-3100       Cut-Off Channel X5 on Buttress Wall, Cell 4, Cell 3	30         26-Apr-20         01-Mar-19         83         11-1300: FS, 23-2800: FS         53-4200: FS           90         05-Apr-20         03-Jul-20         289         53-1000: FS, 53-1200: FS         53-3200: FS	
399 400	5.03.553-3200Temporary Diversion Cut-Off Channel X5 to 12A5.03.553-3300Culvert X5 (5m long) & Perm Connection of Cut-Off Channel X5	20       04-Jul-20       23-Jul-20       289       53-3100: FS, 23-1900: FS       53-3300: FS, M 3. 4: FS         30       26-Dec-20       24-Jan-21       134       53-4100: FF, 63-1900: FS, 53-3200: FS       32-1500: FS	
401 402	5.03.5       53-3400       Construct Perimeter Channel X6 on Eastern Bund & Southern Bund of Cell 1         5.03.5       53-3500       Construct Perimeter Channel X6 on Eastern Bund of Cell 2         5.03.5       53-3500       Construct Perimeter Channel X6 on Eastern Bund of Cell 2	50         02-Nov-19         21-Dec-19         249         53-1400: FS, 53-1500: FS         53-3500: FS           50         20-Feb-20         09-Apr-20         189         63-1000: FS, 53-3400: FS         53-3600: FS           50         20-bit 20         09-Apr-20         189         63-1000: FS, 53-3400: FS         53-3600: FS	
403	5.03.5       53-3600       Construct Perimeter Channel X6 Eastern Bund of Cell 3         5.03.5       53-3700       Culvert X6 (25m long) at Cell 1 Southern Bund         5.03.5       53 3800       Perimeter Channel (Y9R) at Cell 1 Southern Bund	50         09-Jun-20         28-Jul-20         129         63-1900: FS, 53-3500: FS         53-3900: FS           75         25-Jul-19         07-Oct-19         1314         53-1500: FS         53-3900: FS           45         25-Jul 49         07-Sop 19         1344         53-1500: FS         53-1500: FS	
405 406	5.03.5       53-3800       Perimeter Channel (X9B) at Cell 1 Southern & Western Bund         5.03.5       53-3900       Drop Inlet & Culvert (X9) - 21m long	45         25-Jul-19         07-Sep-19         1344         53-1500: FS, 53-1600: FS           180         29-Jul-20         24-Jan-21         129         11-1100: FS, 23-1900: FS, 53-3600: FS         53-4000: FF, 53-4100: FF, 53-6000: FS           2: FS         FS         25-3000: FS         25-3000: FS         25-3000: FF, 53-4100: FF, 53-6000: FS	FS, M 9. 1: FS -90, M 9.
407	5.03.5         53-4000         Sediment Trap (ST)           5.03.5         53-4100         Dual Culvert 74m long (connect to DP4)	180       29-Jul-20       24-Jan-21       129       11-1100: FS, 23-1900: FS, 11-1200: FS, 53-3900: FF       53-6000: FS, M 9. 3: FS -90, M 9. 4: FS         180       29-Jul-20       24-Jan-21       129       11-1100: FS, 11-1200: FS, 23-1900: FS, 53-3900: FF       53-3300: FF, 53-6000: FS, M 9. 1: FS -90, M 9. 1:	
409	5.03.5       53-4100       Dual Culvert 74m long (connect to DP4)         SA2.5.03.6       Drainage - Ground Water         5.03.6       53-4200       Construct Groundwater Collection Pipe along Cells X1 & X2 Eastern Bund	180       29-Jul-20       24-Jan-21       129       11-1100: FS, 11-1200: FS, 23-1900: FS, 53-3900: FF       53-3300: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, M 9. 1: FS - 53-3000: FF, 53-6000: FS, 53-1000: FS, 53-2000: FS         200       26-May-19       03-Aug-19       9       11-1100: FS, 23-1600: FS, 53-2900: FS       53-1400: FS, 53-4300: FS, 63-1000: FS	
410	5.03.6 53-4300 Construct Groundwater Collection Pipe along Cell X3 Eastern Bund	50         04-Aug-19         22-Sep-19         159         53-4200: FS         53-4200: FS	
412 413 414	5.03.6       53-4400       Construct Groundwater Collection Pipe along Intercell Bund X2/X3         5.03.6       53-4500       Construct Manhole MH-X1         SA2.5.03.7 Utilities - Distribution within New Infrastructure Area	50       23-Sep-19       11-Nov-19       209       53-4300: FS       53-4500: FS, 63-1200: FS         30       12-Nov-19       11-Dec-19       209       53-4400: FS       52-2300: FS, M 9. 5: FS         391       11-Aug-19       04-Sep-20       276       276       276	
415 416	5.03.753-4600Power Supply HV Works (Transformer & HV switchgear)5.03.753-4700Power Distribution, LV Power Supply Works	5       30-Jun-20       04-Jul-20       0       54-3000: FS       12-1200: FS         2       05-Jul-20       06-Jul-20       0       54-3100: FS, 12-1200: FS       12-1000: FS	
417 418	5.03.7     53-4800     Sewerage (Collection to LTP)       5.03.7     53-4900     Sewerage (Discharge to Site Boundary)	60         07-Jul-20         04-Sep-20         271         54-1000: FS, 54-3100: FS, 54-3300: FS, 54-4100: FS         12-1100: FS, 53-6100: FS           60         07-Jul-20         04-Sep-20         271         54-1000: FS, 54-4100: FS, 54-4600: FS         12-1100: FS, 53-6100: FS	
419 420	5.03.7         53-5000         Lighting Provision           5.03.7         53-5100         Fire Services	30         07-Jul-20         05-Aug-20         6         54-100: FS, 54-4100: FS, 54-4600: FS         12-1100: FS, 32-2100: FS           115         12-Mar-20         04-Jul-20         2         53-6800: FS         12-1000: FS	
421 422	5.03.7         53-5200         Water Supply (Fresh & Salt)           5.03.7         53-5300         Telecom & Network	115       12-Mar-20       04-Jul-20       338       53-6600: FS, 53-6700: FS       12-1100: FS         45       11-Aug-19       24-Sep-19       622       53-6400: FS       12-1100: FS         45       22-lum 20       22-lum 20       53-6400: FS       54-6000 FS	
423 424 425	5.03.7       53-5400       Gas Network (LFG to LTP)         SA2.5.03.8 Utilities - Works Associated with Utilities Undertakers         SA2.5.03.8.U1       CLP	15       22-Jun-20       06-Jul-20       176       54-1000: FF       54-2800: FS         703       27-Feb-19       29-Jan-21       129       60-100       60-100       60-100         459       27-Feb-19       30-May-20       43       60-100       60-100       60-100       60-100	
426	5.03.8.U1 53-5500 Excavate Trench for CLP Cable	100         13-May-19         20-Aug-19         194         23-2900: FS         53-5800: FS, 54-1000: SS, 54-4100: SS         53-5800: FS, 54-1000: SS, 54-4100: SS         1: FS -60, M10. 2: FS -30, M10. 3: FS	
427 428	5.03.8.U1       53-5600       Backfill Trench after CLP Cable Laying         5.03.8.U1       53-5700       CLP Cable Laying (from CLP Substation to Site Boundary)         5.03.8.U1       53-5800       CLP Cable Laying (from Site Boundary to H)/ Switchroom)	30         01-May-20         30-May-20         43         53-5800: FS         54-1000: FF, 54-4100: FF, 54-4600: FF           200         27-Feb-19         14-Sep-19         229         32-2400: FS         54-3000: FS         54-3000: FS           60         02-Mar-20         30-Apr-20         0         53-5500: FS         53-5600: FS         53-5600: FS         53-5600: FS	
429	5.03.8.U1       53-5800       CLP Cable Laying (from Site Boundary to HV Switchroom)         5.03.8.U1       53-5900       CLP HV associated equipment installation	60       02-Mar-20       30-Apr-20       0       53-5500: FS, 54-2900: FS, 32-2400: FS, 53-5900: FF 15       53-5600: FS, 54-3000: FS         120       18-Dec-19       15-Apr-20       0       54-2900: FS, 32-2400: FS       53-5800: FF 15	
431 432	SA2.5.03.8.U2         DSD           5.03.8.U2         53-6000         Connection to Storm Drain System	147         05-Sep-20         29-Jan-21         129           5         25-Jan-21         29-Jan-21         129         53-4100: FS, 53-4000: FS, 53-3900: FS         32-1500: FS           5         05-Sep-20         00-Sep-20         271         53-4100: FS, 53-4000: FS         32-1500: FS	
433 434 435	5.03.8.U2     53-6100     Connection to Foul Drain System       SA2.5.03.8.U3     Telecom       5.03.8.U3     53-6200     Excavate Trench for PCCW	5         05-Sep-20         09-Sep-20         271         53-4800; FS, 53-4900; FS         32-1500; FS           100         13-May-19         20-Aug-19         327         53-6400; FS, 54-1000; SS, 54-4100; SS         53-6400; FS, 54-1000; SS, 54-4100; SS           60         13-May-19         11-Jul-19         307         23-2900; FS         53-6400; FS, 54-1000; SS, 54-4100; SS	
436	5.03.8.U3     53-6300     Backfill Trench after PCCW Cable Laying	10         11-Aug-19         20-Aug-19         327         53-6400: FS         54-1000: FF, 54-4100: FF, 54-4600: FF	
437 438 430	5.03.8.U3       53-6400       Laying Cables & Connection         SA2.5.03.8.U4       WSD         5.03.8.U4       53-6500       Install Watermain & Piping for Water Supplies	30         12-Jul-19         10-Aug-19         327         53-6200: FS         53-5300: FS, 53-6300: FS           304         13-May-19         11-Mar-20         338         53-600: FS, 53-6700: FS, 53-6800: FS	FS, 53-6900: FS
440	5.03.8.U4 53-6600 Connection for Fresh Water & Meter Installation	30         11-Feb-20         11-Mar-20         338         53-6500: FS, 32-2300: FS         53-5200: FS	
441 442	5.03.8.U4       53-6700       Connection for Salt Water         5.03.8.U4       53-6800       Connection for Fire Services         5.03.8.L4       53-6900       Connection for Cooling Tower & Meter Installation	30         11-Feb-20         11-Mar-20         338         53-6500: FS, 32-2300: FS         53-5200: FS           30         11-Feb-20         11-Mar-20         2         53-6500: FS, 32-2300: FS         53-5100: FS           30         11-Feb-20         11-Mar-20         11         53-6500: FS, 32-2300: FS         53-5100: FS           30         11-Feb-20         11-Mar-20         117         53-6500: FS, 32-2300: FS         54-2700: FS, 54-3900: FS	
443 444 445	5.03.8.U4       53-6900       Connection for Cooling Tower & Meter Installation         SA2.5.03.8.U5       HyD Lighting         5.03.8.U5       53-7000       Installation of Public Street Lighting / Handover	30         11-Feb-20         11-Mar-20         117         53-6500: FS, 32-2300: FS         54-2700: FS, 54-3900: FS           120         07-Jul-20         03-Nov-20         216	
446 447 448	SA2.5.04 Building Construction, incl. E&M and System Installation, and T&C         SA2.5.04.A Part X1 Area A         5.04.A       54-1000       General Area & Access Road	890         31-Dec-18         07-Jun-21         0         0           554         31-Dec-18         06-Jul-20         36	
449	5.04.A     54-1000     General Alea & Access Road       5.04.A     54-1100     Carpark & Supporting Area	60         31-Dec-18         28-Feb-19         64         23-1300: FS, 11-1100: FS         53-5000: FS, 53-5400: FF, 53-7000: FS           31-Dec-18         28-Feb-19         64         23-1300: FS, 11-1100: FS         32-1500: FS, M 5.11: FS -30, M 5.12: F	FS, 68-1700: FS
450	5.04.A     54-1200     Diesel Fuel Tanks	60         08-May-20         06-Jul-20         36         23-1300: FS, 23-5200: FS, 12-1000: FF, 11-1100: FS         32-2200: FS	
451	5.04.A         54-1300         EPD Building           5.04.A         54-1400         Fire Service Tank	270       30-Apr-19       24-Jan-20       44       23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1700: SS 60       32-2100: FS, M 5. 4: FS -135, M 5. 5: F         270       29-Jun-19       24-Mar-20       44       23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1300: SS 60       32-2100: FS, M 5. 10: FS, 12-1000: FS, 12-1	
453	5.04.A         54-1400         File Service Tank           5.04.A         54-1500         GVL Building	270         29-301-19         24-401-20         44         25-1300. FS, 23-5200. FS, 11-1100. FS, 54-1300. SS 60         52-2100. FS, M 5. 10. FS, M 5. 11. SF 30, M 5. 2: SF           300         31-Dec-18         26-Oct-19         44         23-1300: FS, 23-5200: FS, 11-1100: FS         32-2100: FS, M 5. 1: SF 30, M 5. 2: SF           54-1700: SS 60         54-1700: SS 60         32-2100: FS, M 5. 1: SF 30, M 5. 2: SF	
454	5.04.A     54-1600     Laboratory Building       5.04.A     54-1700     Maintenance Building & Area	270       28-Aug-19       23-May-20       44       23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1400: SS 60       32-2100: FS, M 5. 6: FS -135, M 5. 7: F         270       01-Mar-19       25-Nov-19       44       23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1500: SS 60       32-2100: FS, M 5. 8: FS -135, M 5. 7: F	
456	5.04.A     54-1700     Maintenance Building & Area       5.04.A     54-1800     Storage Facility & Area	270         01-Mar-19         25-Nov-19         44         23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1500: SS 60         32-2100: FS, M 5. 8: FS -135, M 5. 9: F           60         01-Mar-19         29-Apr-19         64         23-1300: FS, 11-1100: FS, 54-1100: FS         32-1500: FS, M 5.11: FS -30, M 5.12: F           54-2000: FS         44         23-1300: FS, 11-1100: FS, 54-1100: FS         54-2000: FS         32-2100: FS, M 5.11: FS -30, M 5.12: F	
457	5.04.A         54-1900         Waste Oil Tanks           5.04.A         54-2000         Water Service House	90         08-Apr-20         06-Jul-20         36         23-1300: FS, 23-5200: FS, 12-1000: FF, 11-1100: FS         32-2200: FS	
459	5.04.A 54-2000 Water Service House SA2.5.04.B Part X1 Area B SA2.5.04.B 1 BioPlant Building	60       30-Apr-19       28-Jun-19       64       23-1300: FS, 23-5200: FS, 11-1100: FS, 54-1800: FS       32-2100: FS, M 5.10: FS, 12-1000: FS,         890       31-Dec-18       07-Jun-21       0       0         330       17-Jan-19       12-Dec-19       243	
461	SA2.5.04.B.1       BioPlant Building         5.04.B.1       54-2100       LTP BioPlant Building         SA2.5.04.B.2       Leachate Treatment Plant	330         17-Jan-19         12-Dec-19         243           330         17-Jan-19         12-Dec-19         243         23-1300: FS, 23-5200: FS, 23-3200: FS, 11-1100: FS, 32-2200: FS, 32-2200: FS, M 6. 2: FS - 31-1000: FS           589         31-Dec-18         10-Aug-20         21         21	S-165, M 6. 3: FS
463	SA2.5.04.B.2       Leachate Treatment Plant         5.04.B.2       54-2200       Main Plant Area included Civil works	589         31-Dec-18         10-Aug-20         21           274         31-Dec-18         30-Sep-19         0         23-1300: FS, 23-3200: FS, 11-1100: FS         54-2300: FS, 54-2400: FS, 54-2500: FS           SF 30, M 6. 4: FS -137, M 6. 5: FS         SF 30, M 6. 4: FS -137, M 6. 5: FS         SF 30, M 6. 4: FS -137, M 6. 5: FS	
464	5.04.B.2         54-2300         MEP Installation           5.04.B.2         54-2400         SBR Tanks	220         01-Oct-19         07-May-20         0         41-2100: FS, 41-1800: FS, 22-2100: FS, 54-2200: FS, 12-1000: FS 60, 32-1900: FS, 54-2600: M 6. 9: FS, 32-2200: FS           100         01-Oct-19         08-Jan-20         236         41-2400: FS, 54-2200: FS         54-2600: FS, M 6. 6: FS	0: FS, M 6. 8: FS -110,
466 467	5.04.B.2         54-2400         SBR Tanks           5.04.B.2         54-2500         Ammonia Stripper           SA2.5.04.B.3         LTP - Test & Commission	100         01-Oct-19         08-Jan-20         236         41-2400: FS, 54-2200: FS         54-2600: FS, M 6. 6: FS           315         01-Oct-19         10-Aug-20         21         41-3000: FS, 54-2200: FS         54-2600: FS, M 6. 8: FS -150, M 6. 9: F           301         11-Aug-20         07-Jun-21         0         6         6	FS F
468	5.04.B.3         54-2700         Wet testing	301         11-Aug-20         07-0 u1/21         0         2           45         11-Aug-20         24-Sep-20         21         54-2300: FS, 54-2400: FS, 54-2500: FS         23-6600: FS -150, 23-6900: SS, 54-270           75         25-Sep-20         08-Dec-20         21         54-2600: FS, 12-1200: FS, 53-6900: FS, 31-2200: FS, 54-2800: FS, M11. 2: FS	700: FS, M11. 1: FS
470	5.04.B.3         54-2700         Wet testing           5.04.B.3         54-2800         Operational testing	75         25-Sep-20         08-Dec-20         21         54-2600: FS, 12-1200: FS, 53-6900: FS, 31-2200: FS, 51-2200: FS, 51-22	
471	SA2.5.04.C Part X1 Area C SA2.5.04.C.1 LFG - Power Supply Building	730         31-Dec-18         29-Dec-20         0	
472 473	SA2.5.04.C.1       LFG - Power Supply Building         5.04.C.1       54-2900       LFG Building (with Transformer Room)	530         17-Jan-19         29-Jun-20         5           335         17-Jan-19         17-Dec-19         0         23-1300: FS, 23-3500: FS, 11-1100: FS, 31-1000: FS         53-5800: FS, 53-5900: FS, 54-3000: FS           60         01 May 20         20 Jun 20         0         E4 2000: ES E1 2600: ES E2 2600: ES E2 2700: ES         E3 4600: ES M 7 4: ES 20 M 7 5: ES	
474 475	5.04.C.1     54-3000     Transformer & HV Swtichgear Installation       5.04.C.1     54-3100     MEP Installation, with T&C	60         01-May-20         29-Jun-20         0         54-2900: FS, 41-1200: FS, 53-5800: FS, 53-5700: FS         53-4600: FS, M 7. 4: FS -30, M 7. 5: FS           75         18-Dec-19         01-Mar-20         125         54-2900: FS         32-1400: FS, 32-2100: FS, 53-4700: FS	
476 477	SA2.5.04.C.2         LFG Treatment Plant           5.04.C.2         54-3200         Main Plant Area included Civil Works	554         31-Dec-18         06-Jul-20         0         FS - 30, M 7. 5: FS           384         31-Dec-18         18-Jan-20         0         23-3500: FS, 11-1100: FS         54-3300: FS, 54-3400: FS, 54-3500: FS	FS, 54-3600: FS,
478	5.04.C.2         54-3300         MEP Installation	54-3700: FS, 54-3800: FS, M 7. 1: SF 3           170         19-Jan-20         06-Jul-20         0         54-3200: FS, 12-1000: FF         32-2000: FS, 53-4800: FS, 54-3900: FS	<sup>3</sup> 0, M 7. 2: FS -200, M
479	5.04.C.2 54-3400 GHS600 Blower 601 A&B Relocation	15         19-Jan-20         02-Feb-20         155         23-5800: FS, 54-3200: FS         54-3900: FS, M 7. 4: FS -8, M 7. 5: FS	
480 481 482	5.04.C.2       54-3500       Pre-treatment         5.04.C.2       54-3600       Flares (incl. PLC control, interlink to Towngas PF & LTP)         5.04.C.2       54-3700       LEG Engine (incl. on-grid protection, PLC control, turning)	60         19-Jan-20         18-Mar-20         110         41-3900: FS, 54-3200: FS         54-3900: FS, M 7. 4: FS -30, M 7. 5: FS           125         19-Jan-20         22-May-20         45         41-3300: FS, 54-3200: FS         54-3900: FS, M 7. 4: FS -60, M 7. 5: FS           110         21-Feb-20         09-Jun-20         27         41-3600: FS, 54-3200: FS         54-3900: FS, M 7. 4: FS -60	
483 484	5.04.C.2       54-3700       LFG Engine (incl. on-grid protection, PLC control, turning)         5.04.C.2       54-3800       Cooling System         SA2.5.04.C.3       LFG - Test & Commission	45       19-Jan-20       03-Mar-20       125       22-1500: FS, 54-3200: FS       54-3900: FS, M 7. 4: FS -25, M 7. 5: FS         176       07-Jul-20       29-Dec-20       0       0	<u></u>
485	5.04.C.3 54-3900 MEP Testing	65         07-Jul-20         09-Sep-20         0         54-3400: FS, 54-3500: FS, 54-3600: FS, 54-3700: FS, 51-2200: FS, 51-220	
486	5.04.C.3     54-4000     Operational Testing	111         10-Sep-20         29-Dec-20         0         53-1300: FS, 63-2700: FS, 63-1800: FS, 53-2300: FS, 53-23	FF, 63-4900: FS,
487	SA2.5.04.D Part X1 Area D	374 29-Jun-19 06-Jul-20 6	

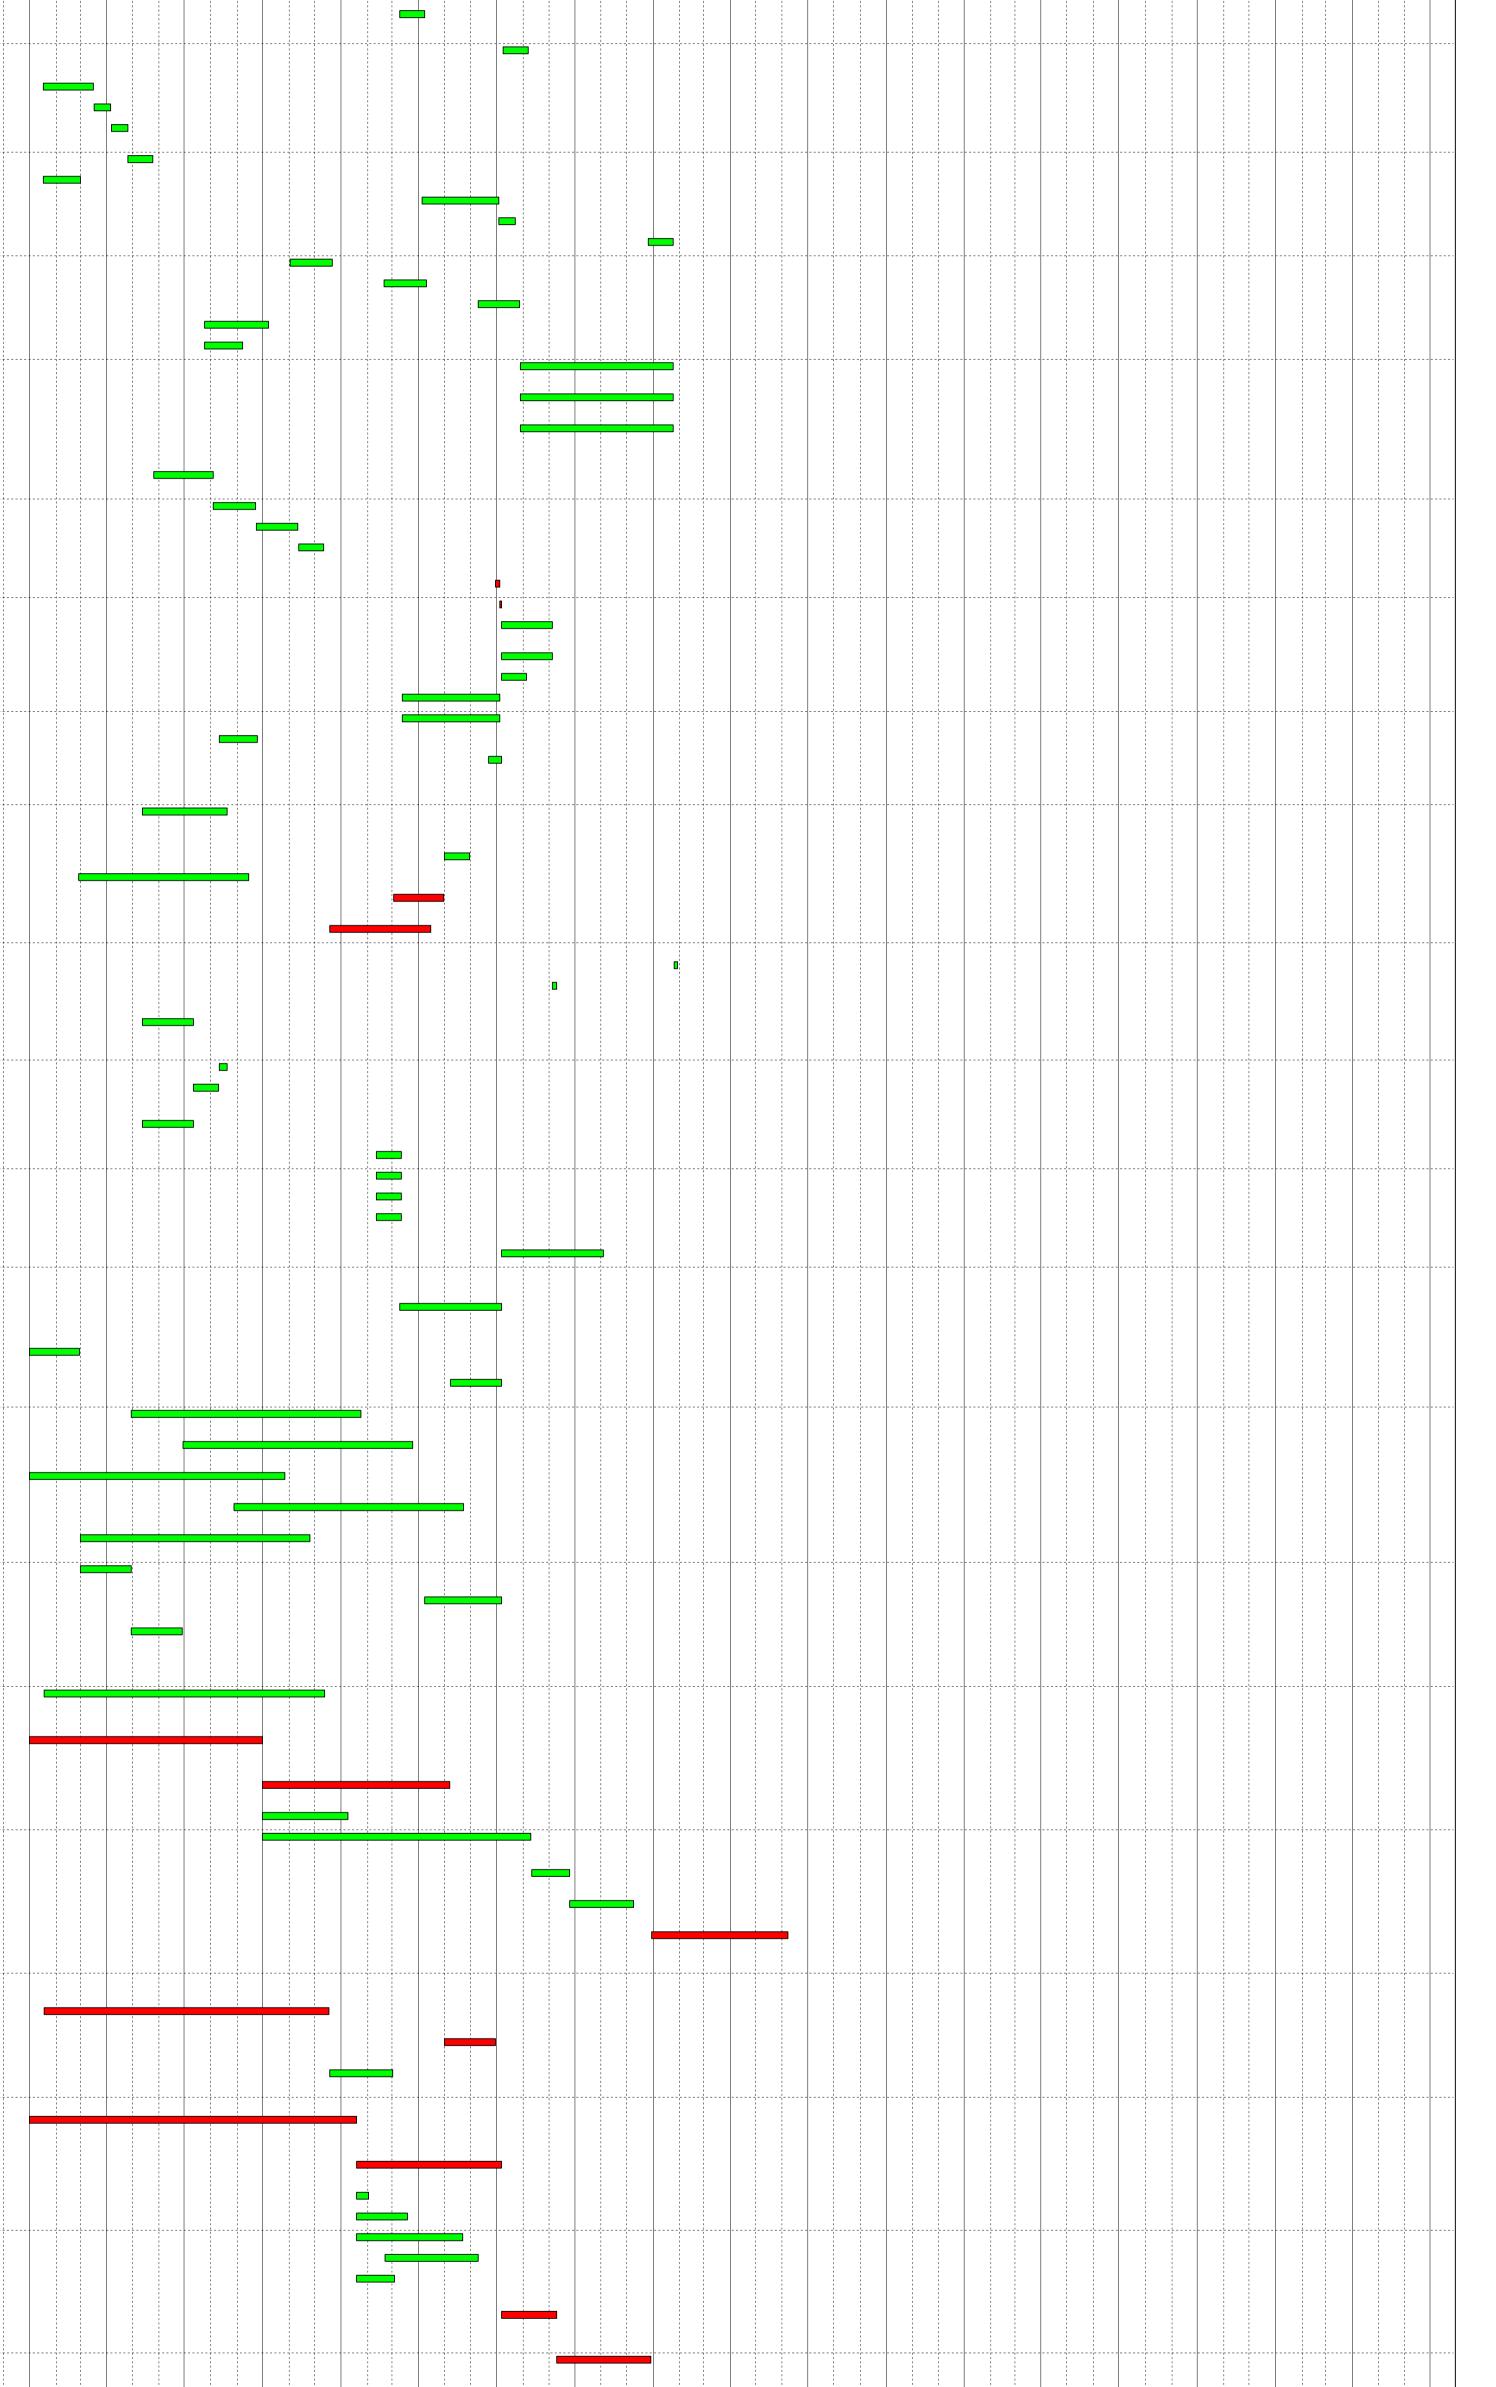

<ul> <li>Milestone</li> </ul>				
	ical Remaining Work	Page : 3 of 4	4	
	Remaining Work			South-East Ne
				0.0000.10,00-4000.10,1012.4.10-00,1012.0.10
508	6.02.9 62-1200 Existing SENT LFG		29-Jul-21 26-Sep-21 339 32-1500: FS, 12-1300: FS, 23-2200: FS	63-3000: FS, 63-4500: FS, M12. 4: FS -30, M12. 5: FS
507	6.02.9 62-1100 Existing SENT LTP	60	29-Jul-21 26-Sep-21 339 32-1500: FS, 12-1300: FS, 23-2200: FS	63-3000: FS, 63-4500: FS, M12. 4: FS -30, M12. 5: FS
506	6.02.9 62-1000 Existing SENT General Infrastructure Facility & Building	60	09-Jul-21 06-Sep-21 239 32-2100: FS, 12-1300: FS	23-2000: SS -90, 63-2800: FS, 63-2900: FS, 63-3000: FS, 63-4300: FS, M12. 4: FS -30, M12. 5: FS
505	SA2.6.02.9 Demolition of SENT Infrastructure Area		09-Jul-21 26-Sep-21 339	
504	SA2.6.02 Advance Works	80	09-Jul-21 26-Sep-21 339	
503	SA2.6 Construction (Remaining Works)	1474	01-Apr-19 13-Apr-23 30	
502	5.08.S 58-1300 Establishment of Screen Planting	270	01-Apr-19* 26-Dec-19 529 58-1200: SS	32-1500: FS
j01	5.08.S 58-1200 Advance Screen Planting		01-Apr-19* 29-Jun-19 529 23-7900: FS, 31-1100: FS, 11-1500: FS	58-1300: SS, M 3. 2: FS
500	SA2.5.08.S Area S	270	01-Apr-19 26-Dec-19 529	
i99	5.08.N 58-1100 Establishment of Screen Planting	270	01-Apr-19* 26-Dec-19 529 58-1000: SS, 14-1800: FS	32-1500: FS
ð	5.08.N 58-1000 Advance Screen Planting	90	01-Apr-19* 29-Jun-19 529 23-7900: FS, 31-1100: FS, 11-1500: FS	14-1800: SS -60, 58-1100: SS, 68-1600: SS 30, M 3. 2: FS
97	SA2.5.08.N Area N		01-Apr-19 26-Dec-19 529	
196	SA2.5.08 Landscape Works - Advance Screen Planting in CWB Country Park		01-Apr-19 26-Dec-19 529	
495	5.04.E 54-4700 Guard House & Entrance Gate	100	26-Jan-20 04-May-20 63 23-1300: FS, 23-5200: FS, 11-1100: FS, 11-1200: FS, 54-4500: SS 30	32-2100: FS, M 8. 2: FS, 12-1000: FS
			12-1000: FF, 11-1100: FS, 11-1200: FS	
494	5.04.E 54-4600 General Area & Access Road		09-Mar-20 06-Jul-20 6 53-5500: SS, 53-5600: FF, 53-6200: SS, 53-6300: FF,	32-2100: FS, 53-4900: FS, 53-5000: FS, 53-7000: FS
493	SA2.5.04.E Part X1 Area E & Part X2	163	26-Jan-20 06-Jul-20 6	
92	5.04.D 54-4500 Wheel Wash Bath	75	27-Dec-19 10-Mar-20 63 23-1300: FS, 23-5200: FS, 41-4500: FS, 11-1100: FS, 54-4200: SS 60	32-2100: FS, M 8. 3: FS, 12-1000: FS, 54-4700: SS 30
191	5.04.D 54-4400 Weighmaster House	120	29-Jun-19 26-Oct-19 64 23-1300: FS, 23-5200: FS, 11-1100: FS, 54-2000: FS	32-2100: FS, M 8. 1: FS, 12-1000: FS, 54-4300: SS 60
190	5.04.D 54-4300 Weighbridge	75	29-Aug-19 11-Nov-19 63 41-4200: FS, 23-1300: FS, 23-5200: FS, 11-1100: FS, 54-4400: SS 60	32-2100: FS, M 8. 6: FS -40, M 8. 7: FS, 54-4200: SS 60
89	5.04.D 54-4200 VWF Building	120	28-Oct-19 24-Feb-20 63 23-1300: FS, 23-5200: FS, 41-4500: FS, 11-1100: FS, 54-4300: SS 60	32-2100: FS, M 8. 4: FS, M 8. 6: FS -60, M 8. 7: FS, 12-1000: FS, 54-4500: SS 60
			53-6300: FF, 12-1000: FF, 11-1100: FS	53-7000: FS, M 8. 5: FS
488	5.04.D 54-4100 General Area & Access Road		09-Mar-20 06-Jul-20 6 23-1300: FS, 53-5500: SS, 53-5600: FF, 53-6200: SS,	32-2100: FS, 53-4800: FS, 53-4900: FS, 53-5000: FS,
487	SA2.5.04.D Part X1 Area D	37/	29-Jun-19 06-Jul-20 6	

# WBS Path Activity Activity Name	Dur Start Finish Total Predecessor Details	Successor Details		2018		20	110		21	120		2021			2022	2		2023
	Float		Q2	Q3	Q4 Q1	Q2	Q3	Q4 Q1	1 Q2	Q3	Q4 Q1	Q2	Q3 Q4	Q1	Q2	Q3	Q4	Q1 Q2 G
509 SA2.6.03 Civil Engineering Works	1259 02-Nov-19 13-Apr-23 30																	
510         SA2.6.03.2         Landfill Cell 2           511         6.03.2         63-1000         Earth bund (Eastern)	449         02-Nov-19         23-Jan-21         810           110         02-Nov-19         19-Feb-20         9         11-1100: FS, 23-2500: FS, 53-4200: FS, 53-1400: FS, 53-1400	53-3500; FS. 63-1500; FS. 63-1800; FS. 63-1900; FS.																
	53-2800: FS	63-2000: FS, 63-2100: FS, 63-2200: FS, M12. 1: FS -50, M12.																
		2: FS, 63-1100: FS																
512 6.03.2 63-1100 Earth bund (Western)	110 20-Feb-20 08-Jun-20 84 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS,	63-1400; FS. 63-1500; FS. 63-1700; FS. 63-3500; FS.																
	63-1000: FS	63-3600: FS, 63-1200: FS																
513 6.03.2 63-1200 Intercell bund (Cell 2/3)	90 09-Jun-20 06-Sep-20 734 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS,	63-1500: FS																
	53-4400: FS, 63-1100: FS																	
<b>514</b> 6.03.2 63-1300 Site Formation	75 02-Nov-19 15-Jan-20 14 11-1100: FS, 23-2500: FS, 53-1800: FS, 53-1400: FS	63-1400: FS, 63-4200: FS																
515 6.03.2 63-1400 Pump Station (PS#2X)	45 09-Jun-20 23-Jul-20 84 63-1300: FS, 63-1100: FS	63-1600: FS, 63-1700: FS																
516 6.03.2 63-1500 Lining Works	90 01-Oct-20* 29-Dec-20 710 41-1500: FS, 63-1000: FS, 63-1100: FS, 63-1200: FS	63-1600: FS, M12. 3: FS, 63-2400: FS												· · · · · · · · · · · · · · · · · · ·				
517 6.03.2 63-1600 Protective Stone Laying & Leachate Collection Pipe	25 30-Dec-20 23-Jan-21 810 63-1500: FS, 41-1500: FS, 63-1400: FS	32-1600: FS, M12. 3: FS																
518 6.03.2 63-1700 Install Leachate Force Main	75 24-Jul-20 06-Oct-20 84 63-1100: FS, 41-1500: FS, 63-1400: FS	54-2800: FS, M12. 3: FS																
519 6.03.2 63-1800 Install Landfill Gas Pipe on earth bund	35 20-Feb-20 25-Mar-20 168 41-1500: FS, 63-1000: FS	54-4000: FS, M12. 3: FS																
520 SA2.6.03.3 Landfill Cell 3	714 20-Feb-20 02-Feb-22 435																	
<b>521</b> 6.03.3 63-1900 Earth bund (Eastern)	110 20-Feb-20 08-Jun-20 9 11-1100: FS, 53-4200: FS, 63-1000: FS, 53-4300: FS, 53-2800: FS, 63-4200: FS	53-3300: FS, 53-3600: FS, 63-2400: FS, 63-2700: FS, M12. 1: FS -50, M12. 2: FS, 63-2000: FS -45, 63-2200: FS																
	55-2000. FS, 05-4200. FS	F3 -30, M12. 2. F3, 03-2000. F3 -43, 03-2200. F3																
522 6.03.3 63-2000 Earth bund (Western)	110 25-Apr-20 12-Aug-20 19 11-1100: FS, 63-1000: FS, 63-1900: FS -45	63-2300: FS, 63-2400: FS, 63-2600: FS, 63-3700: FS,																
		63-2100: FS -45																
<b>523</b> 6.03.3 63-2100 Intercell bund (Cell 3/4)	105         29-Jun-20         11-Oct-20         789         11-1100: FS, 63-1000: FS, 63-4200: FS, 63-2000: FS -45	63-2400: FS																
524 6.03.3 63-2200 Site Formation	75 09-Jun-20 22-Aug-20 9 11-1100: FS, 63-1000: FS, 63-1900: FS	63-2300: FS																
<b>525</b> 6.03.3 63-2300 Pump Station (PS#3X)	45 23-Aug-20 06-Oct-20 9 63-2200: FS, 63-2000: FS	63-2500: FS, 63-2600: FS																
<b>526</b> 6.03.3 63-2400 Lining Works	100 01-Oct-21* 08-Jan-22 435 41-1500: FS, 63-2000: FS, 63-2100: FS,	63-2500: FS, M12. 3: FS																
	63-1500: FS																	
527         6.03.3         63-2500         Protective Stone Laying & Leachate Collection Pipe	25 09-Jan-22 02-Feb-22 435 63-2400: FS, 41-1500: FS, 63-2300: FS	32-1700: FS, M12. 3: FS																
528 6.03.3 63-2600 Install Leachate Force Main	75 07-Oct-20 20-Dec-20 9 63-2000: FS, 41-1500: FS, 63-2300: FS	53-2500: SS -90, 54-2800: FS, M12. 3: FS																
529 6.03.3 63-2700 Install Landfill Gas Pipe on earth bund	35 09-Jun-20 13-Jul-20 58 41-1500: FS, 63-1900: FS	54-4000: FS, M12. 3: FS																
530 SA2.6.03.4 Landfill Cell 4	584 07-Sep-21 13-Apr-23 30																	
531 6.03.4 63-2800 Remaining Portion of Buttress Wall	120 07-Sep-21 04-Jan-22 494 62-1000: FS																	
532 6.03.4 63-2900 Earth bund (Western) incl. MSE Wall	120 07-Sep-21 04-Jan-22 239 62-1000: FS	63-3000: FS, 63-3100: FS, 63-3200: FS, 63-3400: FS,																
		63-3800: FS, 63-3900: FS, 63-4100: SS -90, M 9. 6: FS -60, M 9. 7: FS -30, M 9. 8: FS																
533 6.03.4 63-3000 Site Formation	120 05-Jan-22 04-May-22 239 62-1000: FS, 62-1200: FS, 63-2900: FS,	63-3100: FS																
	63-4100: FS	63-3300: FS, 63-3400: FS																
<b>534</b> 6.03.4 63-3100 Pump Station (PS#4X)	45 05-May-22 18-Jun-22 239 63-3000: FS, 63-2900: FS																	
535 6.03.4 63-3200 Lining Works	135 01-Oct-22* 12-Feb-23 0 41-1500: FS, 63-2900: FS	63-3300: FS, M12. 6: FS																<b></b>
536 6.03.4 63-3300 Protective Stone Laying & Leachate Collection Pipe	60         13-Feb-23         13-Apr-23         0         41-1500: FS, 63-3200: FS, 63-3100: FS	12-1900: FS, 32-1800: FS, M12. 6: FS																
537 6.03.4 63-3400 Install Leachate Force Main & Remove Temporary Leachate Pipe	30 19-Jun-22 18-Jul-22 269 41-1500: FS, 63-2900: FS, 63-3100: FS	12-1900: FS, 32-1800: FS, M12. 6: FS																
538         SA2.6.03.5         Drainage - Surface Run-Off           539         6.03.5         63-3500         Perimeter Channel (X9A) at Cell 2 Western Bund	750         16-Jan-20         03-Feb-22         464           15         09-Jun-20         23-Jun-20         1054         63-1100: FS	12-1900: FS																
540     6.03.5     63-3600     Perimeter Channel (X10A) at Cell 2 Western Bund		63-4000: FS																
	30         09-Jun-20         08-Jul-20         1029         63-1100: FS           20         42.0-x         20         44.0-x         20         62.0000         FC																	
541 6.03.5 63-3700 Perimeter Channel (X10A) at Cell 3 Western Bund	30         13-Aug-20         11-Sep-20         964         63-2000: FS	63-4000: FS																
542 6.03.5 63-3800 Perimeter Channel (X10A) at Cell 4 Western Bund	20 05-Jan-22 24-Jan-22 464 63-2900: FS	63-4000: FS																
543 6.03.5 63-3900 Perimeter Channel (X10C) at Cell 4 Western Bund	15 05-Jan-22 19-Jan-22 469 63-2900: FS	63-4000: FS																
544 6.03.5 63-4000 Connection to Existing DP3	10 25-Jan-22 03-Feb-22 464 63-3900: FS, 63-3600: FS, 63-3700: FS, 63-3800: FS	12-1900: FS																
545 6.03.5 63-4100 Remove Cut-Off Channel C-7 at bottom of Buttress Wall	30 09-Jun-21 08-Jul-21 419 63-2900: SS -90	63-3000: FS																
546 6.03.5 63-4200 Temporary Channel (X7T) at SENT Infrastructure Area	30 16-Jan-20 14-Feb-20 14 63-1300: FS	63-1900: FS, 63-2100: FS																
547 SA2.6.03.6 Drainage - Ground Water	85 07-Sep-21 30-Nov-21 529																	
548         6.03.6         63-4300         Construct Temporary Channel (TC-1), from MH-1 to Existing UC-825	50         07-Sep-21         26-Oct-21         529         23-1900: FS, 11-1300: FS, 62-1000: FS	63-4400: FS																
549 6.03.6 63-4400 Divert GW at MH-1 to TC-1	5 27-Oct-21 31-Oct-21 529 63-4300: FS	63-4500: FS, M 9. 9: FS																
550 6.03.6 63-4500 Reconnection of GWCP across Cell 4	30 01-Nov-21 30-Nov-21 529 62-1100: FS, 62-1200: FS, 63-4400: FS	12-1900: FS																
551 SA2.6.03.8 Utilities - Works Associated with Utilities Undertakers	255 15-Nov-20 27-Jul-21 655																	
552 SA2.6.03.8.U1 CLP	210 30-Dec-20 27-Jul-21 655																	
553 6.03.8.U1 63-4600 LFG Generator On-grid Testing	180         30-Dec-20         27-Jun-21         655         32-2500: FS, 12-1200: FS, 54-4000: FS	63-4700: FS																
554 6.03.8.U1 63-4700 LFG Generator On-grid Inspection & Verify	30 28-Jun-21 27-Jul-21 655 63-4600: FS	12-1900: FS																
555 <u>SA2.6.03.8.U6 TownGas</u>	55 15-Nov-20 08-Jan-21 855													·····				
556 6.03.8.U6 63-4800 Laying Gas Mains (from LFG to Town Gas PF)	45 15-Nov-20 29-Dec-20 855 54-4000: FF	63-4900: FS																
557 6.03.8.U6 63-4900 Gas Meter Relocation & Connection at LFG	10 30-Dec-20 08-Jan-21 855 63-4800: FS, 54-4000: FS	12-1900: FS																
558 SA2.6.04 Building & E&M Works	661 01-Oct-19 22-Jul-21 660																	
559     SA2.6.04.C Part X1 Area C       560     SA2.6.04.C.02 LFG Treatment Plant	661         01-Oct-19         22-Jul-21         660           661         01-Oct-19         22-Jul-21         660																	
561         6.04.C.02         64-1000         GHS600 Blower 601 C Relocation	15 08-Jul-21 22-Jul-21 660 32-1500: FS	12-1900: FS																
562 6.04.C.02 64-1100 Absorption Chiller (Optional)	90 01-Oct-19 29-Dec-19 1231 54-2200: FS	12-1900: FS																
563 SA2.6.08 Landscape Works	613 01-Apr-19 03-Dec-20 891																	
564 SA2.6.08.1 SENT Area - Tree Removal & Transplanting	240 01-Apr-19 26-Nov-19 1264																	
565         6.08.1         68-1000         Access trees condition and select for transplanting	30 01-Apr-19* 30-Apr-19 1264 14-1300: FS	68-1100: FS, 68-1200: FS, 68-1400: FS																
566         6.08.1         68-1100         Prepare new site to receive trees	90 01-May-19 29-Jul-19 1264 68-1000: FS	68-1200: SS																
567 6.08.1 68-1200 Transplant selected trees	120 01-May-19 28-Aug-19 1264 68-1000: FS, 68-1100: SS	68-1300: FS																
568 6.08.1 68-1300 Prune trees prior to removal from Cell 4	90 29-Aug-19 26-Nov-19 1264 68-1200: FS	12-1900: FS																
569 6.08.1 68-1400 Tree Felling - Part X3	90 01-May-19 29-Jul-19 1384 23-8200: FS, 31-1600: FS, 68-1000: FS	12-1900: FS																
570 SA2.6.08.2 SENTX Area - Trial Nursery & Tree Planting	583 01-May-19 03-Dec-20 891																	
571         6.08.2         68-1600         Trial Nursery	300 01-May-19 24-Feb-20 1174 14-1800: FS, 58-1000: SS 30	12-1900: FS, M 3. 2: FS					·····	+										
572 6.08.2 68-1700 Landscaping in New Infrastructure Area	150 07-Jul-20 03-Dec-20 891 54-1000: FS, 23-7600: FS	12-1900: FS																

Remaining Work		South-East New Territories Land Fill Extension (SA2-SENTX)	Date	Revision	Checked	Approved
	Page : 4 of 4		11-May-18	SENTX-GVL-W-PB-ZZ-0001 Rev. I01		
<ul> <li>Milestone</li> </ul>		Baseline Programme	20-Jul-18	SENTX-GVL-W-PB-ZZ-0001 Rev. I02 (Detailed)		

Annex B

# Environmental Mitigation Implementation Schedule

# Annex B Environmental Mitigation Implementation Schedule

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the		<b>implement</b> ure? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
Air Quali	ty – Cons	truction Phase								
4.8.1	AQ1	<ul><li><u>Blasting</u></li><li>The area within 30m of the blasting area will be wetted prior to blasting.</li></ul>	To minimise potential dust nuisance	Blasting area and 30m of blasting area	SENTX Contractor		✓		Air Pollution Control (Construction Dust) Regulations	Not applicable. Blasting is not required in the latest landfill design
		• Blasting will not be carried out when the strong wind signal or tropical cyclone warning signal No. 3 or higher is hoisted, unless this is with the express prior permission of the Commissioner of Mines.								uesign
		• loose material and stones in the Site will be removed prior to the blast operation								
		• During blasting, blast nets, screens and other protective covers will be used to prevent the projection of flying fragments and material resulting from blasting								
4.8.1	AQ2	<ul> <li><u>Rock Drilling</u></li> <li>Watering will be carried out at the rock drilling activities to avoid fugitive dust emissions.</li> </ul>	To minimise potential dust nuisance	Rock drilling area	SENTX Contractor		✓		Air Pollution Control (Construction Dust) Regulations	Not applicable. Rock drilling is not required in the latest landfill design
4.8.1	AQ3	Site Access Road	To minimise	Main haul	SENTX		✓		Air Pollution Control	Implemented

(1) D=Design; C=Construction; O/R=Operation/Restoration; A=Aftercare

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? <sup>(1)</sup> D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		• The main haul road will be kept clear of dusty materials or sprayed with water.	potential dust nuisance	road	Contractor		(Construction Dust) Regulations	
		• The main haul road will be paved with aggregate or gravel.					HKAQO and EIAO- TM Annex 4	
		• Vehicle speed will be limited to 10kph.						
4.8.1	AQ4	Stockpiling of Dusty Materials	To minimise	All	SENTX	$\checkmark$	Air Pollution Control	Deficiency of
		• Any stockpile of dusty materials will be covered entirely by impervious sheeting	potential dust nuisance	construction works area	Contractor		(Construction Dust) Regulations	mitigation measures but rectified by the Contractor
		or placed in an area sheltered on the top and three sides or sprayed with water so as to ensure that the entire surface is wet.					HKAQO and EIAO- TM Annex 4	
4.8.1	AQ5	Loading, unloading or transfer of dusty_ materials	To minimise potential dust	All construction	SENTX Contractor	$\checkmark$	Air Pollution Control (Construction Dust)	Implemented
		<ul> <li>All dusty materials will be sprayed with water immediately prior to any loading, unloading or transfer operation so as to maintain the dusty material wet.</li> </ul>	nuisance	works area			Regulations HKAQO and EIAO- TM Annex 4	
4.8.1	AQ6	Site Boundary and Entrance	To minimise	Site boundary	SENTX	$\checkmark$	Air Pollution Control	Not applicable
		• Where a site boundary adjoins a road, street, service lane or other area accessible	potential dust nuisance	and entrance	Contractor		(Construction Dust) Regulations	
		to the public, hoarding of height not less than 2.4m from ground level will be provided along the entire length of that portion of the site boundary except for the site entrance or exit.					HKAQO and EIAO- TM Annex 4	
4.8.1	AQ7	Excavation Works	To minimise	All	SENTX	$\checkmark$	Air Pollution Control	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to	Location of the Measures	Who to implement the measure?	the m	easu	mplement ire? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		• Working area of any excavation or earth moving operation will be sprayed with water immediately before, during and immediately after the operation so as to ensure that the entire surface is wet.	address potential dust nuisance	construction works area	Contractor				(Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	
4.8.1	AQ8	<ul> <li>Building Demolition</li> <li>The area where the demolition works are planned to take place will be sprayed with water immediately prior to, during and immediately after the demolition activities.</li> <li>Any dusty materials remaining after a stockpile is removed will be wetted with</li> </ul>	To minimise potential dust nuisance	All construction works area	SENTX Contractor		-		Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	Implemented
4.8.1	AQ9	<ul> <li>water and cleared from the surface of roads or street.</li> <li><u>Construction of the Superstructure of Building</u></li> <li>Effective dust screens, sheeting or netting will be provided to enclose the scaffolding from the ground level up to the highest level of the scaffolding.</li> </ul>	To minimise potential dust nuisance	All construction works area	SENTX Contractor		1		Air Pollution Control (Construction Dust) Regulations HKAQO and EIAO- TM Annex 4	Implemented
4.8.1	AQ10	Should a stone crushing plant be needed on site, the control measures recommended in the <i>Best Practicable Means Requirement for</i> <i>Mineral Works (Stone Crushing Plants) BPM</i> 11/1 should be implemented.	To minimise potential dust nuisance	Stone crushing plant/ construction phase	SENTX Contractor	·	~		Best Practicable Means Requirement for Mineral Works (Stone Crushing Plants) BPM 11/1	Not applicable. Stone crushing plant is not required in the latest landfill design

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main	Location of the Measures	Who to implement the measure?			<b>implement</b> <b>Sure?</b> <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
			Concerns to address		the measure.	D	C	07 K / K		
4.8.1	AQ11	Good site practices such as regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions.	To minimise potential dust nuisance	All construction works area	SENTX Contractor		~		HKAQO and EIAO- TM Annex 4	Implemented
4.10.1	AQ12	Dust monitoring once every 6 days	Ensure the dust generated from the project meets the air quality requirement	At monitoring locations shown in <i>Figure 3.2a</i>	SENTX Contractor		✓		HKAQO and EIAO- TM Annex 4	Implemented
Air Quali	ty - Oper	ation, Restoration and Aftercare Phases								
4.8.2	AQ13	Odour • Enclosing the weighbridge area	To minimise odour nuisance	Weighbridge area	SENTX Contractor	✓		~	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less odorous, enclosing the weighbridge area is not necessary
4.8.2	AQ14	• Providing a vehicle washing facility before the exit of SENTX and providing sufficient signage to remind RCV drivers to pass through the facility before leaving SENTX		Vehicle washing facility	SENTX Contractor	✓		✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ15	• Reminding the RCV drivers to empty the liquor collection sump and close the valve	To minimise odour nuisance	Tipping face	SENTX Contractor			✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	When to the mea	sure? (1)		What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D C	O/R	А	measure to achieve?	
		before leaving the tipping face								only, which is relatively dry, the amount of liquor generated is expected to minimal
4.8.2	AQ16	• Washing down the area where spillage of RCV liquor is discovered promptly	To minimise odour nuisance	SENTX Site	SENTX Contractor		~		EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only, which is relatively dry, the amount of liquor generated is expected to minimal.
4.8.2	AQ17	• Reminding operators to properly maintain their RCVs and ensure that liquor does not leak from the vehicles		SENTX Site	SENTX Contractor		V		EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only, which is relatively dry, the amount of liquor generated is expected to minimal.
4.8.2	AQ18	• Installation of landfill gas control system to enhance collection of landfill gas from the waste mass and hence minimise odour associated with fugitive landfill gas emissions	To minimise odour nuisance	SENTX Site	SENTX Contractor	✓	✓	~	EIAO-TM Annex 4	Implemented
4.8.2	AQ19	• Progressive restoration of the areas which	To minimise	SENTX Site	SENTX	✓	√	✓	EIAO-TM Annex 4	Implemented

EIA Ref.	EM&A Ref		nvironmental Protection Measures/ Aitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			impler ure? <sup>(1)</sup>	nent	What requirements or standards for the	Implementation Status and Remarks
	Kei	10	ningation weasures	Measure & Main Concerns to address	the measures	the measure?		C	O/R	А	measure to achieve?	Status and Kentarks
			reach the finished profile (a final capping system including an impermeable liner will be put in place) and installation of a permanent landfill gas extraction system	odour nuisance		Contractor						
4.8.2	AQ20	•	Installing deodorizers along the site boundary adjacent to the ASRs	To minimise odour nuisance	SENTX Site boundary	SENTX Contractor			*	•	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less odorous, installation of deodorizers is not necessary.
4.8.2	AQ21	•	Erecting a vertical barrier, wall or structure softened by planting rows of trees/shrubs or landscape feature along the site boundary, particularly in the areas near the ASRs		SENTX Site boundary	SENTX Contractor	~		✓	~	EIAO-TM Annex 4	Implemented
4.8.2 and SENTX latest design	AQ22	•	Maintaining the size of the active tipping face not greater than 1,200 m <sup>2</sup>	To minimise odour nuisance	Active tipping face	SENTX Contractor			~		EIAO-TM Annex 4	Implemented
4.8.2	AQ23	•	Promptly covering the MSW with soil or selected inert materials to control odour emissions	To minimise odour nuisance	Active tipping face	SENTX Contractor			✓		EIAO-TM Annex 4	Not Applicable. SENTX will not receive MSW.
4.8.2	AQ24	•	Maintaining the size of the special waste trench not greater than $6m (l) \times 2.5m (w)$	To minimise odour nuisance	Special waste trench	SENTX Contractor			✓		EIAO-TM Annex 4	Not Applicable. SENTX will not have

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? <sup>(1)</sup> D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
								any special waste trench.
4.8.2 and SENTX latest design	AQ25	• Covering daily covered area with a tarpaulin sheet or 300mm of soil after the landfill operating hours	To minimise odour nuisance	Daily covered area	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ26	• Covering special waste trench with 600 mm of soil and an impervious liner after 5 pm	To minimise odour nuisance	Special waste trench	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. SENTX will not have any special waste trench.
4.8.2	AQ27	• Covering the non-active tipping face with 600mm of soil and an impermeable liner (on top of the intermediate cover), which will not only control odour emissions from landfilled waste but also enhance landfill gas extraction by the landfill gas extraction system	To minimise odour nuisance	Intermediate cover	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ28	• Applying deodorizers or odour suppression agents to control odour emissions from the active tipping face and special waste trench, if any, through spraying or fogging equipment	To minimise odour nuisance	Active tipping face and special waste trench	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less odorous, installation of deodorizers is not necessary. Moreover, SENTX will not have any special waste

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to the mea D C		)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
4.8.2	AQ29	• Providing a mobile cover with retractable or suitable opening to cover up the opening of the special waste trench except during waste deposition and a suitable odour removal unit. The mobile cover should be equipped with powered extraction and suitable odour removal unit for purifying the trapped gas inside the trench before release into the atmosphere	To minimise odour nuisance	Special waste trench	SENTX Contractor		✓		EIAO-TM Annex 4	trench. Not Applicable. SENTX will not have any special waste trench.
4.8.2 and SENTX latest design	AQ30	• Providing a thermal oxidizer for the leachate treatment plant	To minimise odour nuisance as a result of breakdown of thermal oxidizer	Leachate treatment plant	SENTX Contractor	✓	✓	~	EIAO-TM Annex 4	Implemented
4.8.2 and SENTX latest design	AQ31	• Enclosing all the leachate storage and treatment tanks (except for the Sequential Batch Reactor (SBR) or Membrane Bioreactor (MBR) tanks) and diverting the exhaust air from these tanks to a thermal oxidizer or flare to avoid potential odour emissions from the LTP	To minimise odour nuisance	Leachate treatment plant	SENTX Contractor	✓	✓	~	EIAO-TM Annex 4	Implemented
4.8.2	AQ32	• Rescheduling of waste filling activities on- site by avoiding waste filling activities carrying out at the northern area of the site in the summer months between July to November	To minimise odour nuisance	SENTX Site	SENTX Contractor		✓		EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	When the m		mplen re? <sup>(1)</sup>	nent	What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R	А	measure to achieve?	
											odorous, rescheduling of waste filling activities is not necessary.
4.8.2 and SENTX latest design	AQ33	<ul> <li><u>Dust, Gaseous Emission and LFG including</u></li> <li><u>Volatile Organic Compounds (VOCs)</u></li> <li>Keeping the main haul road to the waste filling area wet by regular watering ;</li> </ul>	To minimise dust nuisance	SENTX Site	SENTX Contractor			✓		HKAQO and EIAO- TM Annex 4	Implemented
4.8.2	AQ34	• Compacting the exposed daily and intermediate covered areas well to avoid fugitive dust emission;	To minimise dust nuisance	SENTX Site	SENTX Contractor			✓		HKAQO and EIAO- TM Annex 4	Implemented
4.8.2	AQ35	• Limiting the vehicle speed within SENTX site boundary;	To minimise dust nuisance	SENTX Site	SENTX Contractor			√		HKAQO and EIAO- TM Annex 4	Implemented
4.8.2	AQ36	<ul> <li>Providing vehicle washing bay to avoid vehicles carrying dust to public roads;</li> </ul>	To minimise dust nuisance	SENTX Site	SENTX Contractor			<b>√</b>		HKAQO and EIAO- TM Annex 4	Implemented
4.8.2	AQ37	• Switching off the engine when the diesel- driven equipment is idling;	To minimise gaseous emissions	SENTX Site	SENTX Contractor			✓	✓	-	Implemented
4.8.2	AQ38	<ul> <li>Maintaining the construction equipment properly to avoid any black smoke emissions;</li> </ul>	To minimise gaseous emissions	SENTX Site	SENTX Contractor			✓	✓	-	Implemented
4.8.2	AQ39	Providing sufficient underground landfill gas collection system to capture the landfill gas	To minimise gaseous	SENTX Site	SENTX Contractor			√	✓	EIAO-TM Annex 4	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			impler ure? <sup>(1)</sup>		What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R	А	measure to achieve?	
		generated as much as possible; and	emissions, including LFG and VOCs								
4.8.2	AQ40	Periodic inspections of the final cover should be undertaken to ensure that the capping layer is in good conditions at all times.	To minimise gaseous emissions, including LFG and VOCs	SENTX Site	SENTX Contractor			~	✓	EIAO-TM Annex 4	Implemented
4.10.2	AQ41	Monitoring of ambient TSP once every 6 days	Ensure the dust emission from the project meets the dust requirement	shown in	SENTX Contractor		✓	~		HKAQO and EIAO- TM Annex 4	Implemented
4.10.2	AQ42	Monitoring of ambient VOCs, ammonia and H <sub>2</sub> S, quarterly	Ensure the gaseous emission from the project meets the air quality requirement	At monitoring locations shown in <i>Figure 11.3a</i>	SENTX Contractor			•	✓	Odour thresholds or 1% of Occupational Exposure Limit (OEL) as stipulated in the "UK Health and Safety Executive (HSE) EH 40/05 Occupational Exposure Limits", whichever is lower.	Implemented
4.10.2 and SENTX latest	AQ43	Monitoring of parameters for thermal oxidizer, flares and generator in accordance with requirements stated in Tables 3.4a, 3.5a and 3.6a of the EM&A Manual respectively.	Ensure the gaseous emission from the project meets the air	At the flares and thermal oxidizer stacks when they are	SENTX Contractor			~	<ul><li>✓</li><li>(1)</li></ul>	Emission Limits specified in Contract	Implemented

(1) For LFG flare and LFG generator only.

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the r	neas	<b>implen</b> ure? <sup>(1)</sup> O/R		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
design			quality requirement	in operation							
4.10.2	AQ44	To confirm design assumption of ammonia, it is recommended that the ammonia concentration in the flue gas of the thermal oxidiser be monitored during the commissioning stage of the thermal oxidiser. If required, an emission standard will be set for ammonia for the thermal oxidiser based on the monitoring results. If no ammonia is detected in the flue gas during the decommissioning stage, the monitoring of ammonia in the flue gas of the thermal oxidiser could be discontinued.	Ensure the gaseous emission from the project meets the air quality requirement	At the thermal oxidizer stack during commissioning . If ammonia is detected during commissioning stage, the monitoring will continue.	SENTX Contractor			•		Emission Limits determined during commissioning stage	Implemented
4.10.2 and SENTX latest design	AQ45	Odour patrol in accordance with requirements stated in Table 3.7a of the EM&A Manual.	Ensure the odour emission from the project meets the odour requirement	U U	SENTX Contractor			~		EIAO-TM Annex 4	Implemented
4.10.2	AQ46	Monitoring of meteorological station, continuously	Collect site specific meteorological data	At meteorological station shown in <i>Figure 11.3a</i>	SENTX Contractor		•	✓	~	-	Implemented
Noise – C	onstructio	on Phase									
5.7.1	N1	<ul><li>Adopt good site practice listed below:</li><li>Only well-maintained plant will be</li></ul>	To minimise potential construction	All construction	SENTX Contractor		✓			Noise Control Ordinance (NCO) and	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the mea	o implement Isure? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		operated on-site and plant should be serviced regularly during the construction program;	noise nuisance.	works area				EIAO-TM Annex 5	
		• Silencers or mufflers on construction equipment should be utilized and will be properly maintained during the construction program;							
		• Mobile plant, if any, will be sited as far from NSRs as possible;							
		• Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or should be throttled down to a minimum;							
		• Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and							
		• Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities.							
5.8	N2	Weekly noise monitoring	Ensure noise generated from the project meets the criteria	At monitoring locations shown in <i>Figure 6.4a</i>	SENTX Contractor	~		Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the n	neas	implemo ure? <sup>(1)</sup> O/R	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
Noise – O	peration/	Restoration Phase								
5.7.2	N3	<ul><li>Adopt good site practice listed below:</li><li>Choose quieter PME;</li></ul>	To minimise potential operational noise nuisance.	Within the SENTX Site	SENTX Contractor			✓	Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented
		<ul> <li>Include noise levels specification when ordering new plant items;</li> </ul>							-	Implemented
		• Locate fixed plant items or noise emission points away from the NSRs as far as practicable;							-	Implemented
		<ul> <li>Locate noisy machines in completely enclosed plant rooms or buildings; and</li> </ul>							-	Implemented
		• Develop and implement a regularly scheduled plant maintenance programme so that plant items are properly operated and serviced. The programme should be implemented by properly trained personnel.							-	Implemented
5.8	N4	Weekly noise monitoring	Ensure noise generated from the project meets the criteria	At monitoring locations shown in <i>Figure 6.4a</i>	SENTX Contractor			✓	Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented
Water Qu	ality - Co	onstruction Phase								
6.8.1	WQ1	Construction Runoff								
		• Exposed soil areas will be minimised to	To minimise	All	SENTX		✓		ProPECC PN 1/94	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the		<b>implement</b> <b>sure?</b> <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks		
		reduce the contamination of runoff and erosion.	potential water quality impacts arising from the construction works	construction works area	Contractor				EIAO-TM Annex 6			
6.8.1	WQ2	• Perimeter channels will be constructed in	To minimise	All	SENTX	✓	$\checkmark$		ProPECC PN 1/94	Implemented		
		advance of site formation works and earthworks and intercepting channels will be provided for example along the edge of	potential water quality impacts arising from the	construction works area	Contractor				Water Pollution Control Ordinance (WPCO)			
		excavation.	construction works						EIAO-TM Annex 6			
6.8.1	WQ3	• Silt removal facilities, channels and	To minimise	All	SENTX		$\checkmark$		ProPECC PN 1/94	Implemented		
		manholes will be maintained and the deposited silt and grit should be removed	potential water quality impacts	construction works area	Contractor				WPCO			
		regularly to ensure they are functioning properly at all times.	arising from the construction works	Works area					EIAO-TM Annex 6			
6.8.1	WQ4	• Temporary covers such as tarpaulin will	To minimise	All	SENTX		$\checkmark$		ProPECC PN 1/94	Implemented		
		also be provided to minimise the generation of high SS runoff.	potential water quality impacts arising from the construction works	construction works area	Contractor				WPCO			
6.8.1	WQ5	• The surface runoff contained any oil and	To minimise	All	SENTX		✓		ProPECC PN 1/94	Implemented		
		grease will pass through the oil interceptors.	potential water quality impacts	construction works area	ruction Contractor				WPCO	•		
			arising from the construction works									EIAO-TM Annex 6

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the m	easu	mplement re? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
6.8.1	WQ6	• All sewer and drains will be sealed to prevent building debris, soil etc from entering public sewers/drains before commencing any demolition works	To minimise potential water quality impacts arising from the demolition works	Infrastructure area at existing SENT Landfill	SENTX Contractor	,	~		ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Not applicable
6.8.1	WQ7	• During the excavation works for the twin drainage tunnels, the recycle water for cooling the cutter head of the TBM will be conveyed to the sedimentation tanks for treatment and most of the treated water will be reused, where applicable and as much as possible, in the boring operations.	To minimise potential water quality impacts arising from the tunnel works	Tunnel boring sites	SENTX Contractor	,			ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Not applicable. Excavation of drainage tunnels is not required in the latest landfill design.
6.8.1	WQ8	• The fuel and waste lubricant oil from the on-site maintenance of machinery and equipment will be collected by a licensed chemical waste collector.	To minimise potential water quality impacts arising from improper handling of fuel and oil	SENTX Site	SENTX Contractor	,	•		ProPECC PN 1/94 WPCO Waste Disposal Ordinance (WDO)	Implemented
6.8.1	WQ9	• Implementation of excavation schedules, lining and covering of excavated stockpiles	To minimise contaminated stormwater run- off from the SENTX Site	All construction works	SENTX Contractor	,			ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Implemented
6.13	WQ10	• Monitoring of surface water quality will be conducted on a regular basis as stated in the EM&A Manual.	To minimise potential water quality impacts on surface water arising from the	SENTX Site	SENTX Contractor	,	1		WPCO Water-TM	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main	Location of the Measures	Who to implement the measure?	the n	neas	<b>implement</b> ure? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
			Concerns to address							
			construction works							
6.8.2	WQ11	Sewage Effluents								
		• Sufficient chemical toilets will be provided for the construction workforce.	To minimise potential water quality impacts arising from the sewage effluents	SENTX Site	SENTX Contractor		~		WPCO	Implemented
6.8.2	WQ12	0	To minimise	SENTX Site	SENTX		✓		WPCO	Implemented
		discharge into the surrounding water body.	potential water quality impacts arising from the sewage effluents		Contractor				WDO	
6.8.2	WQ13	• A licensed waste collector will be	To minimise	SENTX Site	SENTX		✓		WPCO	Implemented
		employed to clean the chemical toilets on a regular basis.	potential water quality impacts arising from the sewage effluents		Contractor				WDO	
Water Qu	ality – O	peration/Restoration and Aftercare Phases								
6.9.1	WQ14	Surface Water Management							WPCO	Implemented
		• Inspections of the drainage system, sand traps, settlement ponds and surface water channels will be performed regularly to identify areas necessary for maintenance, cleaning or repair.	To minimise potential water quality impacts on surface water arising from the landfill operations.	SENTX Site	SENTX Contractor			✓	Technical Memorandum Standards for Effluents Discharged into Drainage and Sewerage Systems, Inland and Inshore Waters (Water- TM)	

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When the me D C	easu	-		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
6.9.1	WQ15	• Regular maintenance and replacement, if required, of the HDPE liner will be conducted to prevent degradation from affecting the performance of the capping system.	To minimise potential water quality impacts on surface water arising from the landfill operations.	SENTX Site	SENTX Contractor			~		EIAO-TM Annex 6 WPCO Water-TM EIAO-TM Annex 6	Implemented
6.9.1	WQ16	• Monitoring of surface water quality will be conducted on a regular basis as stated in the EM&A Manual.	<ul> <li>To minimise</li> <li>potential water</li> <li>quality impacts</li> <li>on surface water</li> <li>arising from the</li> <li>landfill</li> <li>operations.</li> </ul>	SENTX Site	SENTX Contractor			*	•	WPCO Water-TM	Implemented
6.9.2 and SENTX latest design	WQ17	<ul> <li>Groundwater Management</li> <li>The groundwater management facilities including the groundwater monitoring wells will be inspected regularly during routine groundwater monitoring programme.</li> </ul>	To minimise potential water quality impacts on groundwater arising from the landfill operations.	SENTX Site	SENTX Contractor			✓	✓	WPCO Water-TM EIAO-TM Annex 6	Implemented
6.9.2	WQ18	• Monitoring of groundwater water quality will be conducted on a regular basis as stated in the EM&A Manual.	To minimise potential water quality impacts on groundwater arising from the	SENTX Site	SENTX Contractor			✓	~	WPCO Water-TM EIAO-TM Annex 6	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			impler ure? <sup>(1)</sup>	nent	What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address landfill		the measure?	D	C	O/R	A	measure to achieve?	
SENTX latest design	WQ19	<ul><li><u>Sewage</u></li><li>All sewage from the operation staff will be diverted to the LTP for treatment or public sewer, if available.</li></ul>	operations. To ensure proper handling of sewage	SENTX Site	SENTX Contractor			✓	~	-	Implemented
6.9.3	WQ20	<ul> <li>Leachate Management</li> <li>The leachate pump houses and related ancillary equipment will be inspected regularly and repairs, if necessary.</li> </ul>	To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate pump houses and related ancillary equipment	SENTX Contractor			~	✓	WPCO Water-TM EIAO-TM Annex 6	Implemented
6.9.3	WQ21	• For equipment such as pumps that require routine scheduled maintenance, the maintenance will be performed following manufacturer's recommended frequency.	To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate pumps	SENTX Contractor			✓	•	WPCO Water-TM	Implemented
6.9.3	WQ22	• Preventive maintenance will be implemented so that the possibility for forced shutdown during wet season will be kept to minimal.	To minimise potential water quality impacts on surrounding water bodies	Leachate treatment plant	SENTX Contractor			✓	•	WPCO Water-TM EIAO-TM Annex 6	Implemented

EIA Ref.		Environmental Protection Measures/	Objectives of the		Who to	When		-	lent	What requirements	Implementation
	Ref	Mitigation Measures	Recommended Measure & Main Concerns to address arising from the landfill operations.	the Measures	implement the measure?	the me D C		<b>e</b> ? (I) D/R	A	or standards for the measure to achieve?	Status and Remarks
6.9.3	WQ23	• Emergency procedures or a contingency plan will be established when the LTP is malfunctioned.	To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate treatment plant	SENTX Contractor		·	(	•	WPCO Water-TM EIAO-TM Annex 6	Implemented
6.9.3 and SENTX latest design	WQ24	• There will be sufficient redundancy in the system to handle the leachate flow even if one treatment train is down for maintenance. The leachate may be required to temporarily store within the landfill if the leachate storage lagoon are full and leachate cannot be transported to the LTP for treatment.	To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate treatment plant	SENTX Contractor		·	/	•	WPCO Water-TM EIAO-TM Annex 6	Implemented
6.13	WQ25	• Monitor the quality of effluent discharged from the LTP	To ensure discharge quality comply with WPCO requirement	Leachate treatment plant discharge point	SENTX Contractor		·	/	✓	WPCO Water-TM	Implemented
6.10.1	WQ26	<ul> <li>Potential Leakage of Leachate</li> <li>Regular groundwater quality monitoring will be carried out to monitor the performance of the leachate containment system.</li> </ul>	To minimise potential water quality impacts on surrounding	SENTX Site	SENTX Contractor		•	/	✓	WPCO Water-TM	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	the	meas	implen ure? <sup>(1)</sup>		What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R	A	measure to achieve?	
			water bodies arising from the landfill operations.								
6.10.1	WQ27	Maintenance and replacement of the	To minimise	SENTX Site	SENTX			✓	✓	WPCO	Implemented
		capping system should be carried out, if necessary, to prevent control infiltration	potential water quality impacts		Contractor					Water-TM	
		and leachate seepage from any damaged cap.	on surrounding water bodies arising from the leachate leakage.							EIAO-TM Annex 6	
6.10.1	WQ28	• Maintaining control of the leachate level	To minimise	SENTX Site	SENTX			✓	✓	WPCO	Implemented
		through extraction	potential water quality impacts		Contractor					Water-TM	
			on surrounding water bodies arising from surface breakout of leachate.							EIAO-TM Annex 6	
Waste Ma	anagemen	t – Construction Phase									
7.6.1	WM1	All the necessary waste disposal permits are obtained prior to the commencement of construction work.	To ensure compliance with relevant statutory requirements	Before construction works commence	SENTX Contractor	✓	✓			WDO	Implemented
7.6.1	WM2	Management of Waste Disposal									
		The construction contractor will open a billing account with the EPD. Every	To ensure that adverse	SENTX Site	SENTX		✓			WDO	Implemented
		construction waste or public fill load to be	adverse environmental		Contractor					Waste Disposal (Charges for Disposal	

<ul> <li>transferred to the Government waste disposal impacts are facilities, such as public fill reception facilities, prevented sorting facilities, landfills will required a valid "chit" which contains the information of the account holder to facilitate waste transaction recording and billing to the two the disposal of construction waste at the SENT Lundfill and to control fly-tipping. The trip-ticket system will be contractor.</li> <li>A recording system for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established.</li> <li>7.6.1 WM3 Measures for the Reduction of Construction Waste and proger disposal of the system or skips to facilitate reuse or recycling of the inert waste and proger disposal of the system or inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.</li> <li>7.6.1 WM4 Chemical Waste</li> </ul>	EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the mea	o implement sure? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
<ul> <li>valid <sup>2</sup>chit" which contains the information of the account holder to facilitate waste transaction recording and billing to the waste producer. A trip-ticket system will also be established to monitor the disposal of construction waste at the SENT Landfill and to control fly-tipping. The trip-ticket system are uncontrol to the uncontrol the disposal of the contractular requirements and implemented by the contractor.</li> <li>7.6.1 WM <u>Measures for the Reduction of Construction</u> will be established.</li> <li>7.6.1 Implemented in the amount of waste generation implemented by the contractor.</li> <li>7.6.1 Implemented in the specific areas of the contractual requirements and implemented by the contractor.</li> <li>7.6.1 Implemented intervent of the contractual requirements and implemented by the contractor.</li> <li>7.6.1 Implemented intervent of the contractual requirements and implemented by the contractor.</li> <li>7.6.1 Implemented intervent of the contractual requirements and implemented by the contractor.</li> <li>7.6.1 Implemented intervent of the contractual requirements and implemented by the contractor.</li> <li>7.6.1 Implemented intervent of the contractual requirements and implemented by the contractor.</li> <li>7.6.1 Implemented implemented by the contractor.</li> <li>7.6.1 Implemented intervent on the reduction of Construction maste will be segregated and stored in different containers or skips to facilitate reuse or recycling of the inervent waste and proper disposal of the non-inert construction waste. Specific areas of the work site will be disgnated for such segregation and storage if immediate use is not practicable.</li> <li>7.6.1 Implemented for the contractor.</li> <li>7.6.1 Implemented intervent on the reduction of Construction waste and proper disposal of the non-inervent on the reduction of construction waste. Specific areas of the work site will be disgnated for such segregation and storage if immediate use is not practicable.&lt;</li></ul>			facilities such as public fill reception facilities,							
Annex 5 and Annex 6 of Appendix G of Appendix G of 			valid "chit" which contains the information of the account holder to facilitate waste						Technical Circular	
<ul> <li>7.6.1 WM3 <u>Measures for the Reduction of Construction</u> <u>Waste Generation</u> Inert and non-inert construction waste will be segregated and stored in different containers or skips to facilitate reuse or recycling of the inert waste and proper disposal of the non- inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.</li> <li>7.6.1 WM4 <u>Chemical Waste</u></li> </ul>			producer. A trip-ticket system will also be established to monitor the disposal of construction waste at the SENT Landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the						of Appendix G of ETWBTC No.	
Waste GenerationInert and non-inert construction waste will segregated and stored in different containers or skips to facilitate reuse or recycling of the inert waste and proper disposal of the non- inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.To reduce construction subsequencesSENTX Site SENTX Site SENTX Site SENTX ContractorWDOImplemented7.6.1WMChemical WasteChemical WasteSentactorSENTX Site SENTX Site SENTX Site SENTX Site SentactorSENTX Site SENTX Site SentactorSENTX Site SENTX Site SentactorWDOImplemented7.6.1WMChemical WasteChemical WasteSentactorSENTX Site SentactorSentactorSentactor			generated, recycled and disposed of (including the disposal sites) will be							
<ul> <li>segregated and stored in different containers or skips to facilitate reuse or recycling of the inert waste and proper disposal of the non-inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.</li> <li>7.6.1 WM4 Chemical Waste</li> </ul>	7.6.1	WM3								
			segregated and stored in different containers or skips to facilitate reuse or recycling of the inert waste and proper disposal of the non- inert construction waste. Specific areas of the work site will be designated for such segregation and storage if immediate use is	construction	SENTX Site		×			Implemented
	7.6.1	WM4	Chemical Waste				,			

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the me	easure	plement ? <sup>(1)</sup> /R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		The construction contractor will register as a chemical waste producer with the EPD. Chemical waste will be handled in accordance with the <i>Code of Practice on the Packaging, Handling and Storage of Chemical Wastes.</i>	To ensure proper handling of chemical waste	SENTX Site	SENTX Contractor				Code of Practice on the Packaging, Handling and Storage of Chemical Wastes	Implemented
7.6.1	WM5	Sewage								
		An adequate number of portable toilets will be provided at the site to ensure that sewage from site staff is properly collected. The portable toilets will be desludged and maintained regularly by a specialist contractor.	To ensure proper handling of sewage	SENTX Site	SENTX Contractor	v	/		WDO EIAO-TM Annex 7	Implemented
7.6.1 and	WM6	<u>General Refuse</u>								
SENTX latest design		General refuse will be stored in enclosed bins separately from construction and chemical wastes. The general refuse will be delivered to a transfer station or other landfill, separately from construction and chemical wastes, on a daily basis to reduce odour, pest and litter impacts.	handling of	SENTX Site	SENTX Contractor	v	/		WDO EIAO-TM Annex 7	Deficiency of mitigation measures but rectified by the Contractor
		Recycling bins will be provided at strategic locations to facilitate recovery of aluminium can and waste paper from the SENTX Site. Materials recovered will be sold for recycling.								
7.6.1	WM7	<u>Staff Training</u> At the commencement of the construction	To ensure that	SENTX Site	SENTX	v	/			Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	the m	neas	implement ure? <sup>(1)</sup>	What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	С	O/R A	measure to achieve?	
		works, training will be provided to workers on the concepts of site cleanliness and on appropriate waste management procedures, including waste reduction, reuse and recycling.	adverse environmental impacts are prevented		Contractor					
7.8	WM8	Environmental Monitoring & Audit Requirements Weekly audits of the waste management practices will be carried out during the construction phase. The audits examine all aspects of waste management including waste generation, storage, recycling, transport and disposal.	To ensure that adverse environmental impacts are prevented	SENTX Site	SENTX Contractor		✓		WDO	Implemented
Waste Ma	anagemen	t - Operation/Restoration Phase								
7.6.2 and SENTX latest design	WM9	Sludge In case off-site disposal is required, the Contractor will ensure that sludge generated from the LTP will be delivered in closed container to other waste disposal facility e.g. other landfills or a sludge treatment facility, for proper disposal on a daily basis.	To ensure proper handling of sludge	SENTX Site	SENTX Contractor			✓	WDO EIAO-TM Annex 7	Implemented
7.6.2	WM10	<u>Chemical Waste</u> The construction contractor will register as a chemical waste producer with the EPD. Chemical waste will be handled in	To ensure proper handling of chemical waste	SENTX Site	SENTX Contractor			V	WDO EIAO-TM Annex 7	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement	the m	ieasi	impleme ure? <sup>(1)</sup>		What requirements or standards for the	Implementation Status and Remarks
			Measure & Main Concerns to address		the measure?	D	C	O/R	A	measure to achieve?	
		accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes.								Code of Practice on the Packaging, Handling and Storage of Chemical Wastes	
7.6.2	WM11	<u>Sewage</u>									Moved to mitigation
		All sewage from the operation staff will be	To ensure proper	SENTX Site	SENTX			✓		WDO	measure under water quality WQ19. It is a
		diverted to the LTP for treatment or public sewer, if available.	handling of sewage		Contractor					EIAO-TM Annex 7	quality rrg12. It is a measure for water quality rather than waste management.
7.6.2 and	WM12	General Refuse									Implemented
SENTX latest		General refuse will be stored in enclosed bins		SENTX Site	SENTX		√	$\checkmark$		WDO	
design		and disposed of at other landfills or transfer station on a daily basis to reduce odour, pest and litter impacts.	handling of general refuse		Contractor					EIAO-TM Annex 7	
		Recycling bins will be provided at strategic locations to facilitate recovery of aluminium can and waste paper from the SENTX Site. Materials recovered will be sold for recycling.									
Landfill C	Gas Hazaı	rds – Design and Construction Phase									
8.6.2 and SENTX latest design	LFG1	Precautionary measures to be adopted by the contractors at the Project site and the adjacent development site within the landfill consultation zone are outlined in Paragraphs 8.3 to 8.49 of EPD's <i>Landfill Gas Hazard</i> <i>Assessment Guidance Notes (the Guidance Note).</i>		All construction works area	SENTX Contractor		✓			Paragraphs 8.3 to 8.49 of EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the m	neas	<b>impler</b> ure? <sup>(1)</sup> O/R		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		Those precautionary measures applicable to the SENTX will be confirmed in the detailed Qualitative Landfill Gas Hazard Assessment to be submitted by the contractor.									
8.6.2	LFG2	Monitoring will be undertaken when construction works are carried out in confined space within the consultation zone with reference to the monitoring requirements and procedures specified in Paragraphs 8.23 to 8.28 of EPD's <i>Guidance</i> <i>Note</i> will be followed.	To protect workers from landfill gas risk	Confined space within the construction works area	SENTX Contractor		✓				Implemented
		In the event of the trigger levels being exceeded, it is recommended that a person, such as the Safety Officer, is nominated, with deputies, to be responsible for dealing with any emergency which may occur due to landfill gas. In an emergency situation, the nominated person, or his deputies, shall have the necessary authority and shall ensure that the confined space is evacuated and the necessary works implemented for reducing the concentrations of gas. The appropriate organisations shall be contact.									
8.6.3	LFG4	Implementation of engineering measures according to Contract Specification requirements. These measures will include the placement of liner and installation of landfill gas management system to contain, manage and control landfill gas.	To protect workers from landfill gas risk	SENTX Site	SENTX Contractor	~	•	✓	•	EIAO-TM Annex 7	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended	Location of the Measures	Who to implement			implea ure? <sup>(1)</sup>		What requirements or standards for the	Implementation Status and Remarks
	Kei	Miligation Measures	Measure & Main Concerns to address	the measures	the measure?			O/R		measure to achieve?	
8.6.3	LFG5	Engineering measures to significant engineering measures will be required in the design of the SENTX to protect the staff working in the infrastructure area. These measures include a combination of passive and active systems (examples are	To protect workers from landfill gas risk	Infrastructure Area	SENTX Contractor	✓	✓			EPD's Landfill Gas Hazards Assessment Guidance Note EIAO-TM Annex 7	Implemented
		recommended in EPD's <i>Guidance Notes</i> ). Landfill gas monitoring boreholes will be installed at the edge of the waste slope between the waste and the new infrastructure area to monitor the migration of landfill gas, if any.									
Landfill ( Phases	Gas Hazai	rds - Operation, Restoration and Aftercare									
8.6.4	LFG7	To train and ensure staff to take appropriate precautions at all times when entering enclosed spaces or plant rooms. Undertake regular monitoring of landfill gas at the perimeter boreholes to detect if there are any signs of off-site landfill gas migration. Prepare and implement emergency plan in case off-site landfill gas migration is detected.	To protect workers from landfill gas risk	SENTX Site	SENTX Contractor			~	✓	Landfill Gas Hazards Assessment Guidance Note	Implemented
8.7 and SENTX latest design	LFG8	A permanent gas monitoring system with alarm will be installed and operated in all occupied on-site buildings. <u>Environmental Monitoring &amp; Audit</u> <u>Requirements</u> Undertake regular monitoring of landfill gas	To protect workers from landfill gas risk	Within the SENTX and along the SENTX	SENTX Contractor			✓	✓		Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the r		implen sure? <sup>(1)</sup> O/R	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		within the SENTX and along the SENTX boundary as required by the Contract Specification.		boundary					Landfill Gas Hazards Assessment Guidance Note	
Ecology –	Construc	ction Phase								
9.10.2	EC1	Measures to control construction runoff:	To minimise	All	SENTX		✓		EIAO-TM Annex 16	Implemented
		• Exposed soil areas will be minimised to	potential water quality impacts	construction works area	Contractor				ProPECC PN 1/94	
		reduce the contamination of runoff and erosion;	affecting ecological resources						Water Pollution Control Ordinance (WPCO)	
									EIAO-TM Annex 6	
		• To prevent stormwater runoff from washing across exposed soil surfaces, perimeter channels will be constructed in advance of site formation works and earthworks and intercepting channels will be provided for example along the edge of excavation;							-	Implemented
		• Silt removal facilities, channels and manholes will be maintained and the deposited silt and grit will be removed regularly to ensure they are functioning properly at all times;							-	Implemented
		• Temporary covers such as tarpaulin will also be provided to minimise the generation of high suspended solids							-	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the m	easure?		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		<ul> <li>runoff;</li> <li>The surface runoff contained any oil and grease will pass through the oil interceptors; and,</li> </ul>							-	Implemented
		<ul> <li>Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site.</li> </ul>							-	Implemented
9.10.2 and SENTX latest design	EC2	<ul> <li>Good Construction Practice:</li> <li>Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas.</li> <li>The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas.</li> </ul>	To minimise potential ecological impacts arising from the Project	SENTX Site	SENTX Contractor		/		EIAO-TM Annex 16	Implemented
Ecology -	Operatio	n, Restoration and Aftercare Phases								
9.10.2	EC3	Measures for Controlling Leakage of Landfill Leachate Leachate will be contained within the SENTX Site by the proposed impermeable leachate containment system and collected by the	To minimise potential water quality impact affecting the	SENTX Site	SENTX Contractor		V	~	EIAO-TM Annex 16 WPCO Water-TM	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to the meas D C	-		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		installation of drainage system to prevent potential migration of leachate to habitats in the vicinity.	ecological resources						EIAO-TM Annex 6	
9.10.2	EC4	<u>Measures for Controlling Migration of</u> Landfill Gas								Implemented
		Disturbance to habitat in the vicinity and associated wildlife due to migration of landfill gas will be prevented by proper management of the landfill gas generated from the SENTX. Ignition fires will be prohibited to occur within the boundary of the SENTX Site. Surface emission and off- site migration of landfill gas will be regularly monitored.	To minimise potential landfill gas migration affecting ecological resources	SENTX Site	SENTX Contractor		~	✓	EIAO-TM Annex 16	
9.10.3 and SENTX latest design	EC5	<ul> <li>The following compensation planting is recommended as the mitigation measures for the habitat affected due to the SENTX:</li> <li>Provision of 6 ha of mixed woodland planting to compensate the loss of shrubland; and</li> </ul>	Compensation of habitat loss due to the Project	SENTX Site	SENTX Contractor		~	✓	EIAO-TM Annex 16	Implemented
		<ul> <li>Provision of a mosaic of grassland and shrubland in the remaining areas of the SENTX Site.</li> <li>Compensatory planting and restoration of the SENTX can be implemented progressively according to the filling plan of SENTX.</li> </ul>								
9.10.3	EC6	The mixture of grassland, shrubland and woodland habitats are recommended to diversify the habitats for supporting various wildlife in particular butterflies, birds and	To diversify habitats	SENTX Site	SENTX Contractor		✓	✓	EIAO-TM Annex 16	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the m	easu	implen 1re? <sup>(1)</sup> O/R		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		herpetofauna and blend into the existing undisturbed ecological environment.									
9.10.3	EC7	Indigenous plant species of shallow root system, softwood in nature and adaptive to sea shore habitat are recommended to be used in the restoration plan, which can establish well in coastal area with exposure to strong wind and salt spray, with sand soil base. Taking consideration of the relative poor substrate and the difficulties of establishment of some native trees in Hong Kong, it is recommended to include approximately 20% of non-native tree species in the compensatory woodland. The non- native tree species can serve as a nurse species to facilitate the establishment of the native tree species, especially the shading, and it can be replaced by established native tree species progressively. Plant species can also make reference to food plants of butterfly species (in particularly butterfly species of conservation interests recorded within the	To enhance ecological value of the habitats	SENTX Site	SENTX Contractor			*	•	EIAO-TM Annex 16	Implemented
9.10.3	EC8	CWBCP). It is also recommended that a trial nursery for native plant species be set up to fine tone the planting matrix and management intensity of the recommended indigenous tree species for the restoration of the SENTX. It should be noted that native shrubs and tree species had been used for restoration of the existing SENT Landfill, native plant species that could not	To select the most suitable indigenous tree species for the SENTX	SENTX Site	SENTX Contractor	✓		✓	•	EIAO-TM Annex 16	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the n		impler ure? <sup>(1)</sup> O/R		What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		successfully be established on the existing SENT Landfill should be reviewed before the preparation of the compensatory planting list. Special care and intensive management of native plant should be implemented in order to ensure proper establishment of the native plants.									
9.12.1	EC9	Environmental Monitoring & Audit Requirements The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring and audit procedures during the construction period.	To ensure that adverse ecological impacts are prevented	SENTX	SENTX Contractor		✓	✓	~	EIAO-TM Annex 16	Implemented
Landscap	e and Vis	ual – Construction Phase									
10.6.5	LV1	CM1 - The construction area and area allowed for the contractor's office, leachate treatment plant and laboratory areas will be minimised to a practical minimum, to avoid impacts on adjacent landscape.	To minimise the landscape and visual impacts	SENTX Site	SENTX Contractor		✓			EIAO-TM Annex 18 and ETWBC 3/2006	Implemented
10.6.5	LV2	CM2 - Topsoil, where identified, will be stripped and stored for re-use in the construction of the soft landscape works, where practical. The Contract Specification will include storage and reuse of topsoil as appropriate.	To minimise the landscape and visual impacts	All construction works area	SENTX Contractor		✓			EIAO-TM Annex 18	Not applicable
10.6.5	LV3	CM3 - All existing trees at the edges of the landfill will be carefully protected during	To minimise the landscape and	Potential impacted area	SENTX Contractor		✓			EIAO-TM Annex 18 and ETWBC 3/2006	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures construction. Detailed Tree Protection	Objectives of the Recommended Measure & Main Concerns to address visual impacts	Location of the Measures	Who to implement the measure?	the		o implement sure? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		Specification will be provided in the Contract Specification. Under this Specification, the Contractor will be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in Contractor's works areas.								
10.6.5	LV4	CM4 - Trees unavoidably affected by the works will be transplanted, where necessary and practical. A detailed Tree Transplanting Specification will be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods will be allowed in the project programme.	To minimise the landscape and visual impacts	Potential impacted area	SENTX Contractor	•	•		EIAO-TM Annex 18 and ETWBC 3/2006	Deficiency of mitigation measures but rectified by the Contractor
10.6.5 and SENTX latest design	LV5	CM5 - Within 3 months of taking possession of the SENTX Site, the Contractor will plant advance screen planting of native species at Light Standard size at 1.5m centres along the High Junk Peak Trail so as to screen views of the Works from the trail. Tree planting locations will be agreed with AFCD. Works will be completed within 9 months of taking possession of the SENTX Site.	To minimise the landscape and visual impacts	At High Junk Peak Hiking Trail	SENTX Contractor		~		EIAO-TM Annex 18	Implemented
10.6.5	LV6	CM6 - The Contractor's office, leachate treatment plant and laboratory will be given an aesthetic treatment in earth tones to reduce their visual impact and albedo and blend	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	✓	~		EIAO-TM Annex 18	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	the		<b>implement</b> <b>Sure?</b> <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		them into the surrounding landscape.								
10.6.5	LV7	CM7 - The Contractor's office, leachate treatment plant and laboratory will be surrounded by a minimum of 5m wide and 0.75m high earth bund on the west and south sides planted with a dense screen of tree and shrub vegetation. Additional tree planting will be provided in unused spaces with thin infrastructure site, along access roads and in and around car parks. This will be supplemented with shrub planting, where appropriate.	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	•	~		EIAO-TM Annex 18 and ETWBC 7/2002	Not applicable
10.6.5	LV8	CM8 - Planting trials will be carried out in an on-site nursery prior to implementation of the first phase of restoration to establish the best planting matrix and management intensity of the recommended plant materials for the restoration.		SENTX Site	SENTX Contractor		~		EIAO-TM Annex 18	Implemented
11.4.1 and SENTX latest design	LV9	During the preparation of the detailed landscape design plan, the design submission will be audited against the recommendation proposed in the <i>ER Report</i> by the Registered Landscape Architect from the ET.	To ensure the implementation of mitigation measures proposed in this EIA Report	SENTX Site	SENTX Contractor/E T	•	~		EIAO-TM Annex 18	Implemented
Landscap	e and Visi	ual – Operation/Restoration Phase								
10.6.5 and SENTX	LV10	OM1 - Landfill materials will be covered with general fill material or tarpaulin sheet on a daily basis to reduce visual impact.	To minimise the landscape and visual impacts	Tipping area	SENTX Contractor			✓	EIAO-TM Annex 18	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to the mea D C	o implement sure? <sup>(1)</sup> O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
latest design									
10.6.5 and SENTX latest design	LV11	OM2 - Filling and restoration will be phased during the course of operations in a minimum of 4 phases, the restoration of each phase to commence immediately on the completion of filling in that phase.	To minimise the landscape and visual impacts	Tipping area	SENTX Contractor		√	EIAO-TM Annex 18	Implemented
10.6.5	LV12	OM3 - Catch fences will be erected at the perimeter of the waste boundary, to ensure that all waste stays within the site and is not blown into surrounding areas.	To minimise the landscape and visual impacts	Tipping area	SENTX Contractor		✓	EIAO-TM Annex 18	Implemented
10.6.5	LV13	OM4 - All night-time lighting will be reduced to a practical minimum both in terms of number of units and lux level and will be hooded and directional.	To minimise the landscape and visual impacts	Tipping area	SENTX Contractor		✓	EIAO-TM Annex 18	Implemented
11.4.2 and SENTX latest design	LV14	The condition of the restoration plantation will be audited at monthly intervals by a Registered Landscape Architect from the ET.	To check the restoration plantation	SENTX Site	SENTX Contractor/E T		✓	EIAO-TM Annex 18	Implemented

Annex C

Monitoring Schedule for This Reporting Period


# South East New Territories (SENT) Landfill Extension EM&A Impact Monitoring Schedule during Operation/ Restoration Phase


Sun	Mon	Tue	Wed		Thu	Fri	Sat
				1	2		3 4
			Odour Monitoring		Odour Monitoring	Odour Monitoring	Odour Monitoring
			Leachate Monitoring		Leachate Monitoring	Leachate Monitoring	Leachate Monitoring
			Dust Monitoring		Noise Monitoring		
5	6	7		8	9	1	0 11
Odour Monitoring	Odour Monitoring	Odour Monitoring	Odour Monitoring		Odour Monitoring	Odour Monitoring	Odour Monitoring
Leachate Monitoring	Leachate Monitoring	Leachate Monitoring	Leachate Monitoring		Leachate Monitoring	Leachate Monitoring	Leachate Monitoring
		Dust Monitoring	Groundwater Monitoring		Noise Monitoring		
		Groundwater Monitoring					
12	13	14		15	16	i 1	7 18
Odour Monitoring	Odour Monitoring	Odour Monitoring	Odour Monitoring		Odour Monitoring	Odour Monitoring	Odour Monitoring
Leachate Monitoring	Leachate Monitoring	Leachate Monitoring	Leachate Monitoring		Leachate Monitoring	Leachate Monitoring	Leachate Monitoring
	Dust Monitoring	Noise Monitoring			Service Void LFG Monitoring	Stack Monitoring	
		Perimeter LFG Monitoring					
19	20	21		22	23	2	4 25
Odour Monitoring	Odour Monitoring	Odour Monitoring	Odour Monitoring		Odour Monitoring	Odour Monitoring	Odour Monitoring
Leachate Monitoring	Leachate Monitoring	Leachate Monitoring	Leachate Monitoring		Leachate Monitoring	Leachate Monitoring	Leachate Monitoring
Dust Monitoring	Stack Monitoring		Noise Monitoring				Dust Monitoring
	-						
26	27	28		29	30	3	1
Odour Monitoring	Odour Monitoring	Odour Monitoring	Odour Monitoring		Odour Monitoring	Odour Monitoring	
Leachate Monitoring	Leachate Monitoring	Leachate Monitoring	Leachate Monitoring		Leachate Monitoring	Leachate Monitoring	
		Noise Monitoring				Dust Monitoring	
		Surface Water Monitoring					


December 2021


# Air Quality

Calibration Certificates for Dust Monitoring Equipment

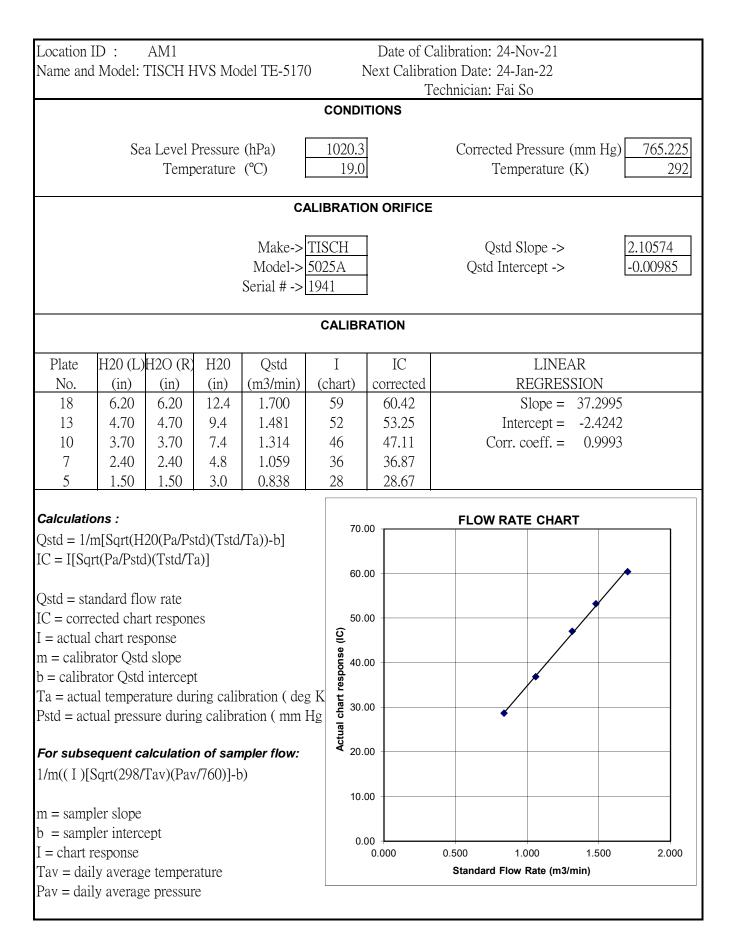

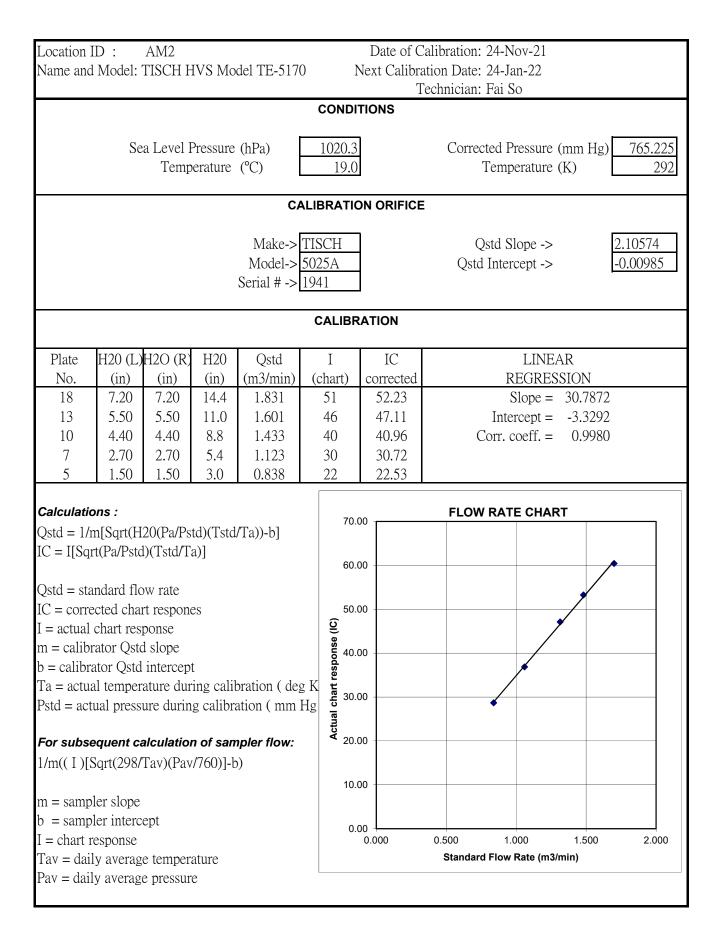

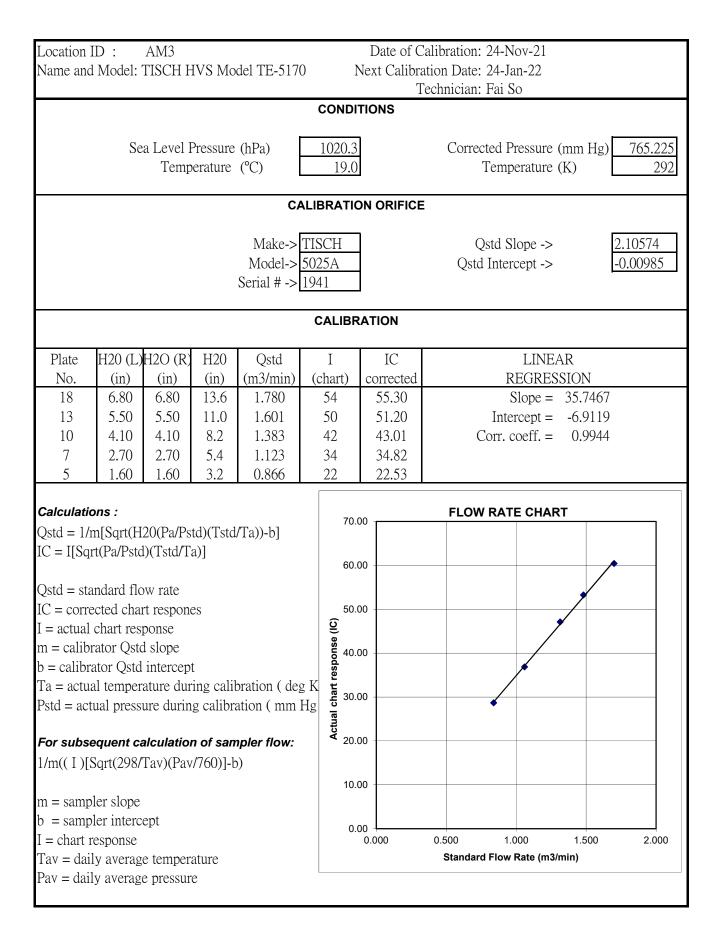

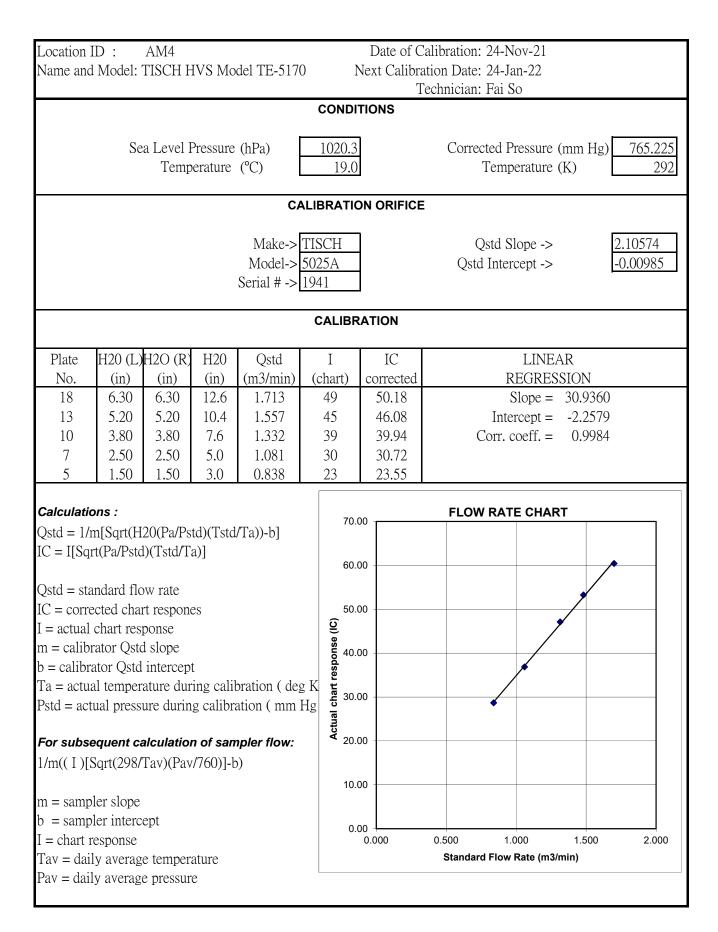


# 24-hour TSP Monitoring Results

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (µg/m3)
1 Dec 21	9:00	2 Dec 21	9:00	Sunny	57
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	141
13 Dec 21	9:00	14 Dec 21	9:00	Sunny	173
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	114
25 Dec 21	9:00	26 Dec 21	9:00	Fine	64
31 Dec 21	9:00	1 Jan 22	9:00	Fine	125
				Average	112
				Min	57
				Max	173

## Table D2.124-hour TSP Monitoring Results at AM1


# *Figure D2.1 Graphical Presentation for 24-hr TSP Monitoring at AM1*

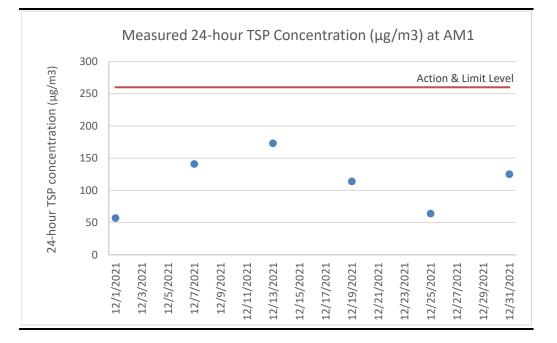

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (µg/m3)
2 Dec 21*	15:00	3 Dec 21	15:00	Sunny	115
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	156
13 Dec 21	9:00	14 Dec 21	9:00	Sunny	152
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	133
25 Dec 21	9:00	26 Dec 21	9:00	Fine	120
31 Dec 21	9:00	1 Jan 22	9:00	Fine	100
				Average	129
				Min	100
				Max	156

## Table D2.224-hour TSP Monitoring Results at AM2


# Figure D2.2 Graphical Presentation for 24-hr TSP Monitoring at AM2

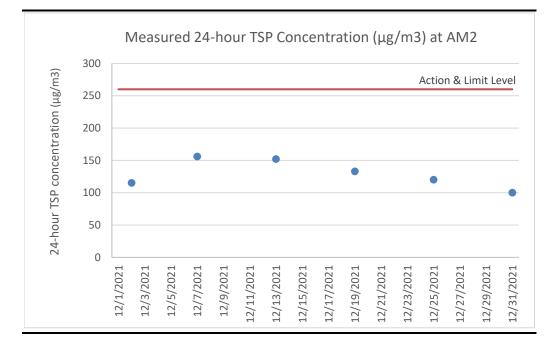

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (µg/m3)
1 Dec 21	9:00	2 Dec 21	9:00	Sunny	128
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	169
13 Dec 21	8:05	14 Dec 21	8:05	Sunny	258
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	191
25 Dec 21	9:00	26 Dec 21	9:00	Fine	189
31 Dec 21	14:25	1 Jan 22	14:25	Fine	155
				Average	182
				Min	128
				Max	258

## Table D2.324-hour TSP Monitoring Results at AM3


*Figure D2.3 Graphical Presentation for 24-hr TSP Monitoring at AM3* 

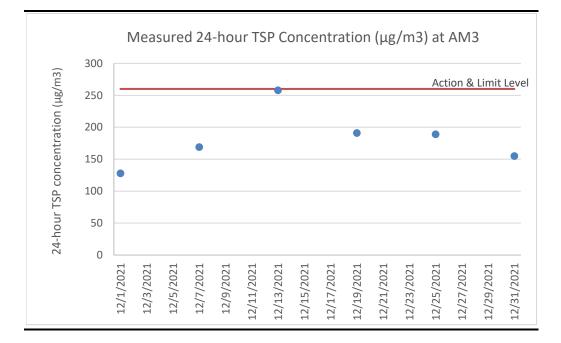

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP (µg/m3)
1 Dec 21	9:00	2 Dec 21	9:00	Sunny	206
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	164
13 Dec 21	9:00	14 Dec 21	9:00	Sunny	282
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	129
25 Dec 21	9:00	26 Dec 21	9:00	Fine	102
31 Dec 21	9:00	1 Jan 22	9:00	Fine	125
				Average	168
				Min	102
				Max	282

## Table D2.424-hour TSP Monitoring Results at AM4

*Figure D2.4 Graphical Presentation for 24-hr TSP Monitoring at AM4* 

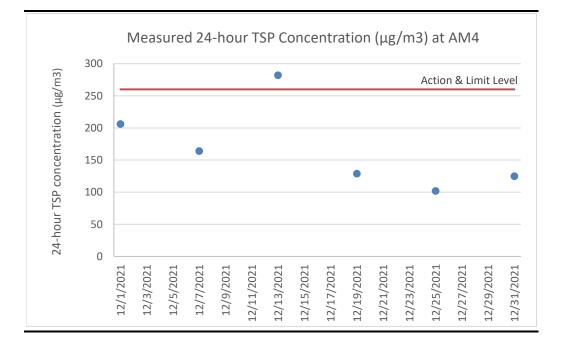


# Event and Action Plan for Dust Monitoring


Annex D3	Event and Action Plan for Air Quality Monitoring During Operation/ Restoration Phase
----------	--

		Action	
Event	ET	IEC	Contractor
Exceedance of Action/Limit Level for dust monitoring	<ul> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Assess effectiveness of Contractor's remedial measures and keep the Project Proponent and IEC informed of the results</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to daily and continue until the monitoring results reduce to below action level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>
Exceedance of Action Level for odour	<ul> <li>Identify source(s) and investigate the cause(s) of exceedance or complaint</li> <li>Prepare the odour complaint form or the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase monitoring frequency to daily until odour not being detected for three consecutive days</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Rectify any unacceptable practice</li> <li>Amend working methods as required</li> <li>Implement amended working methods, if necessary</li> </ul>


		Action	
Event	ET	IEC	Contractor
Exceedance of Limit Level for odour	<ul> <li>Identify source(s) and investigate the cause(s) of exceedance or complaint</li> <li>Prepare the odour complaint form or the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Assess effectiveness of Contractor's remedial measures and keep the Project Proponent and IEC informed of the results</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operating activities and implementation of odour mitigation measures</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Rectify any unacceptable practice</li> <li>Submit proposals for remedial measures to IEC within 3 working days of notification</li> <li>Implement the agreed proposal or amend working methods as required</li> <li>Resubmit proposals if problem still not under control</li> </ul>
Exceedance of Limit Level of stack emission of the thermal oxidizer, flares and generator	<ul> <li>Identify source(s) and investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Assess effectiveness of Contractor's remedial measures and keep the Project Proponent and IEC informed of the results</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to monthly when there are two consecutive exceedances and continue until the monitoring results reduce to below limit level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operating performance of the stack</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Rectify any unacceptable performance</li> <li>Amend design as required</li> <li>Implement amended design, if necessary</li> </ul>


# Meteorological Data

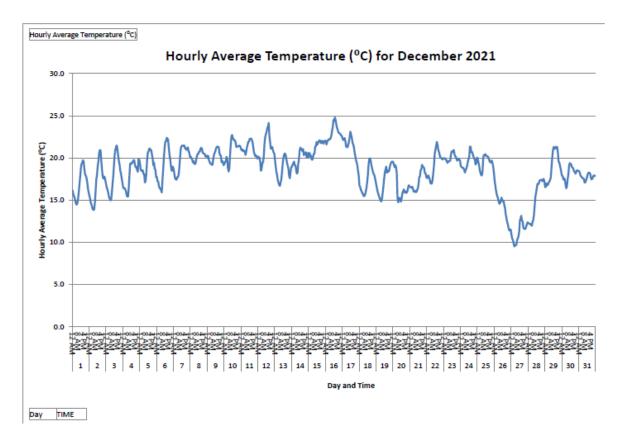

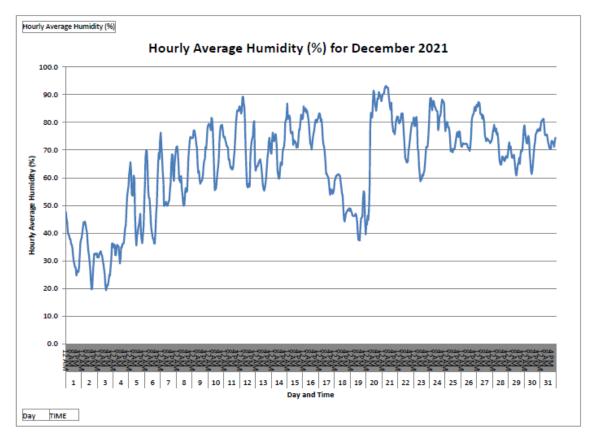



#### ENVIRONMENTAL RESOURCES MANAGEMENT

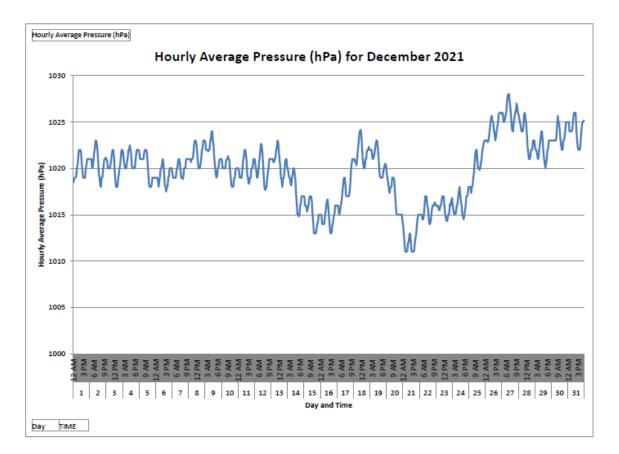


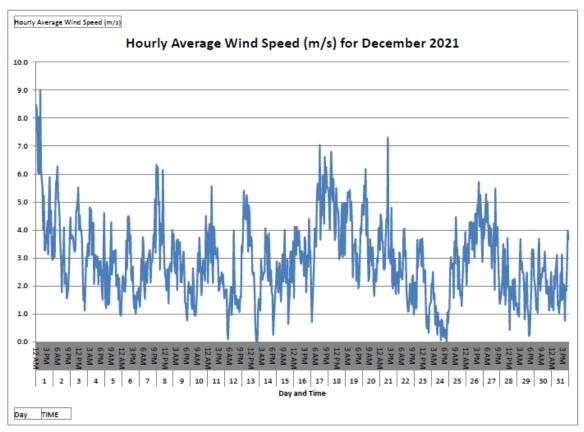

#### ENVIRONMENTAL RESOURCES MANAGEMENT

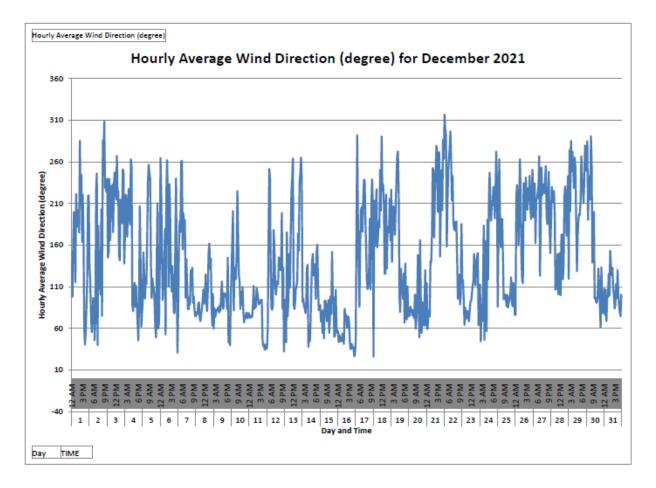

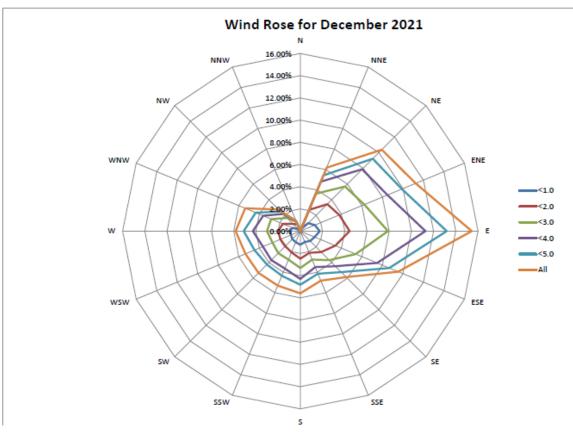

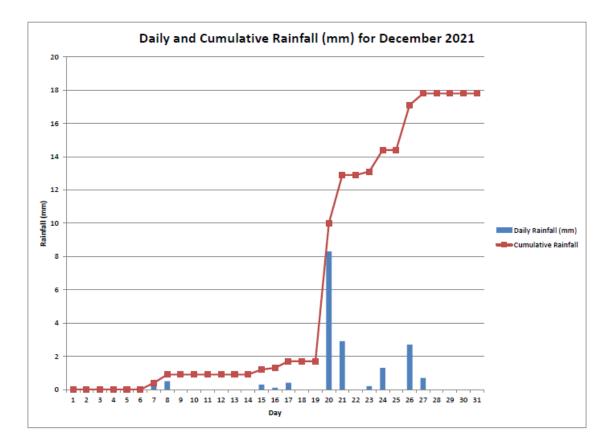

#### ENVIRONMENTAL RESOURCES MANAGEMENT

Certificates of the Qualified Odour Panelist



ALS Life Sciences | Environmental

Certificate No.: C21084

# **Certificate for a Qualified Odour Panellist**

This is to certify that

LAU MEI TUNG

has participated in Ten (10) sets of individual N-Butanol Screening Test during 25 October 2021 - 03 November 2021

with Individual Threshold: 41 ppb/v

and

<u>fulfill</u> the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725:2003) –

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of individual threshold estimates and standard deviation less than 2.3

03 November 2021 Issue Date 03 November 2022 Valid Until

Fung Lim Chee, Richard

ALS Technichem (HK) Pty Ltd

11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong RIGHT SOLUTIONS | RIGHT PARTNER Tel: 852-2610 1044



ALS Life Sciences | Environmental

Certificate No.: C21085

## **Certificate for a Qualified Odour Panellist**

This is to certify that

WONG KA HEI

has participated in Ten (10) sets of individual N-Butanol Screening Test during 25 October 2021 - 03 November 2021

with Individual Threshold: 40 ppb/v

and

<u>fulfill</u> the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725:2003) –

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of individual threshold estimates and standard deviation less than 2.3

03 November 2021 Issue Date 03 November 2022 Valid Until

Fung Lim Chee, Richard

ALS Technichem (HK) Pty Ltd

11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong RIGHT SOLUTIONS | RIGHT PARTNER Tel: 852-2610 1044



ALS Life Sciences | Environmental

Certificate No.: C21086

## **Certificate for a Qualified Odour Panellist**

This is to certify that

WONG HO YU

has participated in Ten (10) sets of individual N-Butanol Screening Test during 25 October 2021 - 03 November 2021

with Individual Threshold: 56 ppb/v

and

<u>fulfill</u> the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725:2003) –

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of individual threshold estimates and standard deviation less than 2.3

03 November 2021 Issue Date 03 November 2022 Valid Until

ee, Richard

ALS Technichem (HK) Pty Ltd

11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong RIGHT SOLUTIONS | RIGHT PARTNER Tel: 852-2610 1044



Serial No.	: P-044
Odour Panel Member	: Wong Wan Ning
Date of Screening Test	: 12 Nov 2021 15 Nov 2021 17 Nov 2021
Valid Until	: 16 May 2022

This is to certify that Miss Wong Wan Ning participated in a set of n-butanol screening tests in our laboratory between 12 Nov 2021 and 17 Nov 2021.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 - 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of CMA Industrial Development Foundation Limited

Wu Chun Fai Assistant Manager – Environmental Division

Date: 17 Nov 2021



Serial No.	: P-043
Odour Panel Member	: Chan Kam Hon
Date of Screening Test	: 12 Nov 2021 15 Nov 2021
	17 Nov 2021
Valid Until	: 16 May 2022

This is to certify that Mr. Chan Kam Hon participated in a set of n-butanol screening tests in our laboratory between 12 Nov 2021 and 17 Nov 2021.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 - 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of CMA Industrial Development Foundation Limited

Wu Chun Fai Assistant Manager – Environmental Division

Date: 17 Nov 2021



Serial No.	: P-042
Odour Panel Member	: Ng Tung Ching
Date of Screening Test	: 12 Nov 2021 15 Nov 2021 17 Nov 2021
Valid Until	: 16 May 2022

This is to certify that Mr. Ng Tung Ching participated in a set of n-butanol screening tests in our laboratory between 12 Nov 2021 and 17 Nov 2021.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 - 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of CMA Industrial Development Foundation Limited

Wu Chun Fai Assistant Manager – Environmental Division

Date: 17 Nov 2021



Serial No.	: P-045
Odour Panel Member	: Cheung Ma Alfonzo Gerardo
Date of Screening Test	: 10 Dec 2021 13 Dec 2021 16 Dec 2021
Valid Until	: 15 Jun 2022

This is to certify that Mr Cheung participated in a set of n-butanol screening tests in our laboratory between 10 Dec 2021 and 16 Dec 2021.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 - 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of CMA Industrial Development Foundation Limited

Wu Chun Fai Assistant Manager – Environmental Division

Date: 16 Dec 2021



Serial No.	: P-037
Odour Panel Member	: Chan Po
Date of Screening Test	: 10 Dec 2021 13 Dec 2021 16 Dec 2021
Valid Until	: 15 Jun 2022

This is to certify that Mr. Chan participated in a set of n-butanol screening tests in our laboratory between 10 Dec 2021 and 16 Dec 2021.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 - 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of CMA Industrial Development Foundation Limited

Wu Chun Fai Assistant Manager – Environmental Division

Date: 16 Dec 2021



This is to certify that

Poon Kwong Lun

has participated in Ten (10) sets of individual n-Butanol Screening Tests

during 12 June 2020 to 26 July 2021

with Individual Threshold: 36 ppb/v; Standard Deviation: 1.14

and

fulfil the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725)

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of Individual threshold estimates and standard deviation less than 2.3

26 July 2021 Issue Date 26 July 2022 Valid Until

Fung Lim Chee, Richard

ALS Technichem (HK) Pty Ltd 1044 11/F Chung Shun Knitting Centre, 1-3 Wing Yip Street, Kwai Chung, NT, Hong Kong

Tel: 852–2610



This is to certify that

Anthony Kwan

has participated in Ten (10) sets of individual n-Butanol Screening Tests

during 30 April 2021 to 23 July 2021

with Individual Threshold: 44 ppb/v; Standard Deviation: 1.49

and

fulfil the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725)

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of Individual threshold estimates and standard deviation less than 2.3

Fung Lim Chee, Richard

23 July 2021 Issue Date

23 July 2022 Valid Until

ALS Technichem (HK) Pty Ltd 1044

11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong

Tel: 852–2610



This is to certify that

Wong Hei Wang

has participated in Ten (10) sets of individual n-Butanol Screening Tests

during 3 November 2020 to 23 July 2021

with Individual Threshold: 50 ppb/v; Standard Deviation: 1.32

and

fulfil the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725)

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of Individual threshold estimates and standard deviation less than 2.3

23 July 2021

Issue Date

23 July 2022 Valid Until

Fung Lim Chee, Richard

11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong



This is to certify that

Ho Tsz Kin

#### has participated in Ten (10) sets of individual n-Butanol Screening Tests

during 30 April 2021 to 23 July 2021

#### with Individual Threshold: 40 ppb/v; Standard Deviation: 1.29

and

fulfil the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725)

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of Individual threshold estimates and standard deviation less than 2.3

23 July 2021 Issue Date 23 July 2022 Valid Until

Fung Lim Chee, Richard

11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong

Tel: 852-2610



This is to certify that

Choi Wai Yiu

has participated in Ten (10) sets of individual n-Butanol Screening Tests

during 08 April 2021 to 14 April 2021

with Individual Threshold: 46 ppb/v; Standard Deviation: 1.36

and

fulfil the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725)

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of Individual threshold estimates and standard deviation less than 2.3

14 April 2021 Issue Date 14 April 2022 Valid Until

Fung Lim Chee, Richard

ALS Technichem (HK) Pty Ltd 1044 11/F Chung Shun Knitting Centre, 1-3 Wing Yip Street, Kwai Chung, NT, Hong Kong

Tel: 852-2610



This is to certify that

Chan Wai Hung

has participated in Ten (10) sets of individual n-Butanol Screening Tests

during 19 June 2020 to 17 July 2021

with Individual Threshold: 47 ppb/v; Standard Deviation: 1.22

and

fulfil the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725)

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of Individual threshold estimates and standard deviation less than 2.3

17 July 2021

Issue Date

17 July 2022 Valid Until

Fung Lim Chee, Richard

ALS Technichem (HK) Pty Ltd 1044 11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong

Tel: 852-2610



This is to certify that

Cheung Wai Hung

has participated in Ten (10) sets of individual n-Butanol Screening Tests

during 23 September 2020 to 17 July 2021

with Individual Threshold: 43 ppb/v; Standard Deviation: 1.29

and

fulfil the Requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN13725)

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 10 sets of Individual threshold estimates and standard deviation less than 2.3

Fung Lim Chee, Richard

17 July 2021 Issue Date 17 July 2022 Valid Until

#### ALS Technichem (HK) Pty Ltd 1044

11/F Chung Shun Knitting Centre, 1–3 Wing Yip Street, Kwai Chung, NT, Hong Kong

Tel: 852-2610

Annex D6

Odour Monitoring Results

#### Table D6.1 Odour Monitoring Results

Date	Weather	Location	Time	Temperature	Wind Speed		From	Odour	Odour	Possible Source	Remarks
				(oC)	(m/s)	Direction	Project Site	5	Characteristic		
1-Dec-21	Sunny	OP1	10:30	20	4.7	Ν	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP2	10:33	20.6	3.9	Ν	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP3	10:37	22.5	1.2	Ν	Yes	1	Oil	Electric Generator	N/A
1-Dec-21	Sunny	OP4	10:40	22.7	2.3	Ε	No	1	Acidic	Leachate Treatment Plant	
1-Dec-21	Sunny	OP5	10:43	22.6	3.6	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP6	10:47	20.8	4.5	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP7	10:50	19.7	6.2	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP8	10:53	20.3	4.2	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP9	10:57	20.4	4.6	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP10	11:01	21.5	1.7	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP1	14:39	20.8	2.6	Ν	Yes	1	grassy	Vegetation	N/A
1-Dec-21	Sunny	OP2	14:43	22.1	0.8	NW	Yes	1	grassy	Vegetation	N/A
1-Dec-21	Sunny	OP3	14:47	21.6	1.9	NE	Yes	1	Diesel	Generator	N/A
1-Dec-21	Sunny	OP4	14:50	24	0.9	Ν	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP5	14:55	22.6	1.1	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP6	14:58	21	2.9	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP7	15:01	20.7	2.7	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP8	15:05	21	1.5	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP9	15:08	21.5	3	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP10	15:11	22	0.5	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP1	18:05	17.1	12	Ν	Yes	0	N/A	N/A	N/A
1-Dec-21	Fine	OP2	18:08	17.6	10.1	Ν	Yes	0	N/A	N/A	N/A
1-Dec-21	Fine	OP3	18:12	17.5	1.9	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Fine	OP4	18:16	17.2	4.5	Е	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP5	18:20	17.3	8.6	Е	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP6	18:24	17.6	7.5	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP7	18:28	17.2	10.7	Ν	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP8	18:32	17	6.5	N	No	1	Diesel	Electric Generator	N/A
1-Dec-21	Fine	OP9	18:36	17.5	6.4	N	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP10	18:40	17.7	4.1	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP1	10:33	22.5	3.6	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP2	10:37	23.5	2.4	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP3	10:40	24.8	1.1	N	Yes	1	Oil	Electric Generator	N/A
2-Dec-21	Sunny	OP4	10:44	24.5	0.8	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP5	10:48	24.6	2.2	NE	Yes	0	N/A	N/A	N/A

ENVIRONMENTAL RESOURCES MANAGEMENT

Date	Weather	Location	Time	Temperature		Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
2-Dec-21	Cumpy	OP6	10:52	(oC) 24.4	(m/s) 2.6	N	No	0	N/A	N/A	N/A
2-Dec-21 2-Dec-21	Sunny Sunny	OP6 OP7	10:52	24.4 22.8	3.2	N	No	0	N/A N/A	N/A N/A	N/A N/A
2-Dec-21 2-Dec-21	5	OP7 OP8	10:55	22.8 23.1	5.2 2.6	N	No	0	N/A N/A	N/A N/A	N/A N/A
2-Dec-21 2-Dec-21	Sunny	OP8 OP9	10:58	23.1 24.2	2.6 1.6	N	No		N/A N/A	N/A N/A	N/A N/A
	Sunny							0			
2-Dec-21	Sunny	OP10	11:06	24.6	0.8	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP1	14:32	22.5	2.4	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP2	14:35	24.8	1.7	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP3	14:38	24.1	1.8	N	Yes	1	Oil	Generator	N/A
2-Dec-21	Sunny	OP4	14:41	26	1.1	N	Yes	1	Acidic	Leachate Treatment Plant	-
2-Dec-21	Sunny	OP5	14:44	26.6	0.6	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP6	14:47	25.5	1.5	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP7	14:50	24.2	2.3	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP8	14:53	23.8	2.9	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP9	14:56	23.8	2.2	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP10	15:02	24	1.4	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Fine	OP1	18:28	19.7	0.5	S	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP2	18:33	19.3	0.5	S	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP3	18:37	17.4	0.8	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Fine	OP4	18:40	17.5	0.9	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Fine	OP5	18:44	17.2	1.3	NW	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP6	18:49	17.5	1.1	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP7	18:52	17.7	1.3	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP8	18:56	17.8	1.3	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP9	18:59	18	1	Ν	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP10	19:03	18	0.5	NE	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP1	10:40	19.2	4.9	NW	Yes	1	grassy	Vegetation	N/A
3-Dec-21	Sunny	OP2	10:44	20.7	2.5	NW	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP3	10:47	20.2	0.8	Ν	Yes	1	Diesel	Generator	N/A
3-Dec-21	Sunny	OP4	10:50	21.1	1.4	Ν	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP5	10:54	21.4	0.9	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP6	10:56	21	3.6	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP7	10:59	20.4	2.9	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP8	11:02	19.5	4.3	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP9	11:06	19.4	5.9	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP10	11:08	19.8	1.9	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP1	14:33	23.3	1.5	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP2	14:36	24.2	1.2	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP3	14:40	25.6	1.2	NE	Yes	0 1	Oil	Electric Generator	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
3-Dec-21	Sunny	OP4	14:44	26.9	2.2	NE	Yes	1	Acidic	Leachate Treatment Plant	N/A
3-Dec-21	Sunny	OP5	14:48	25.8	1.1	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP6	14:51	24.5	2.8	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP7	14:54	24.1	3	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP8	14:57	24.3	1.4	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP9	15:00	24	1.5	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP10	15:04	24.8	1	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP1	18:03	23.2	1.4	Ν	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP2	18:07	22.4	2.2	Ν	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP3	18:11	23.7	0.7	Ν	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP4	18:15	24.2	0.5	Ν	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP5	18:19	24.5	0.4	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP6	18:22	23.9	1.2	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP7	18:25	23.2	1.3	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP8	18:28	22.6	1.3	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP9	18:32	23.1	1.6	Ν	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP10	18:36	24.2	0.6	Ν	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP1	10:40	26.1	2.2	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP2	10:44	25.8	1.9	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP3	10:48	25.2	2.8	SW	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP4	10:52	24.6	3.4	Е	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP5	10:56	24.1	2.6	Е	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP6	11:00	23.9	3.6	Ν	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP7	11:04	24	4.2	Ν	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP8	11:08	23.4	1.2	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP9	11:12	26.3	2.1	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP10	11:16	25.8	2.9	Ν	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP1	14:36	24.9	1.3	Ν	Yes	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP2	14:40	25.3	2.6	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP3	14:44	25.8	3.3	SW	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP4	14:48	24.8	2.3	Е	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP5	14:52	23.3	4.6	Е	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP6	14:56	25.2	1.2	SE	Yes	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP7	15:00	26.1	2	SW	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP8	15:03	26.7	1.5	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP9	15:08	27.6	1.2	Ν	No	1	Acidic	Town gas	N/A
4-Dec-21	Sunny	OP10	15:12	25.8	4.3	NE	Yes	0	N/A	N/A	N/A
4-Dec-21	Fine	OP1	18:05	20.1	1.1	Ν	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
4-Dec-21	Fine	OP2	18:08	19.7	0.7	SE	No	0	N/A	N/A	N/A
4-Dec-21 4-Dec-21	Fine	OP3	18:08 18:12	19.6	0.7	SE	No	0	N/A	N/A	N/A
4-Dec-21	Fine	OP4	18:12	19.5	1.2	SE	No	0	N/A	N/A	N/A
4-Dec-21	Fine	OP5	18:10 18:19	19.2	2.7	E	No	0	N/A	N/A	N/A
4-Dec-21 4-Dec-21	Fine	OP6	18:22	19.2	1.9	E	Yes	0	N/A	N/A	N/A
4-Dec-21	Fine	OP7	18:25	19.4	1.2	N	No	0	N/A	N/A	N/A
4-Dec-21	Fine	OP8	18:28	19.5	0.8	NE	Yes	0	N/A	N/A	N/A
4-Dec-21	Fine	OP9	18:32	19.4	0.7	NE	Yes	1	Acidic	Town gas plant	N/A
4-Dec-21	Fine	OP10	18:36	19.4	0.6	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP1	10:33	24.6	2.3	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP2	10:35	26.1	0.7	N	Yes	0	N/A	N/A	N/A
5-Dec-21 5-Dec-21	Sunny	OP3	10:37	26.3	1.2	N	Yes	0	N/A	N/A	N/A
5-Dec-21 5-Dec-21	Sunny	OP4	10:40	26.1	0.9	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP5	10:49	25.6	2.5	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP6	10:53	25.4	2.5	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP7	10:56	26.2	1.8	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP8	11:00	26.3	1.7	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP9	11:00	25.8	2.3	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP10	11:01	25.3	1.1	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP1	15:15	26.3	2.5	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP2	15:18	26.9	1.6	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP3	15:21	27.1	2.2	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP4	15:25	27.2	1.7	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP5	15:30	26.5	2.7	SE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP6	15:34	26.3	1.8	E	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP7	15:39	25.1	4.2	E	No	1	Acidic	Leachate Treatment Plant	
5-Dec-21	Sunny	OP8	15:43	26.4	1.7	NW	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP9	15:47	26.9	1.2	SW	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP10	15:51	26.2	0.5	S	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP1	18:00	21.3	0.6	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Fine	OP2	18:04	22.2	0.4	S	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP3	18:07	22.4	0.6	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Fine	OP4	18:11	22.1	1.3	E	No	1	Acidic	Leachate Treatment Plant	,
5-Dec-21	Fine	OP5	18:14	21.8	1.9	E	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP6	18:17	22.3	0.9	N	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP7	18:20	22.5	0.7	N	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP8	18:24	21.6	1.4	N	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP9	18:31	22.1	0.8	N	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
5-Dec-21	Fine	OP10	18:36	22.4	1.5	N	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP1	10:35	24.1	3.3	N	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP2	10:39	26	1.4	N	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP3	10:44	26.1	1.9	N	Yes	1	Oil	Generator	N/A
6-Dec-21	Sunny	OP4	10:49	25.8	2.2	NE	Yes	0	N/A	N/A	Ń/A
6-Dec-21	Sunny	OP5	10:53	25.6	0.9	NE	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP6	10:57	25.4	1.2	Ν	No	0	N/A	N/A	Ń/A
6-Dec-21	Sunny	OP7	11:00	24.3	1.1	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP8	11:04	24.8	0.7	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP9	11:08	25.6	1	SE	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP10	11:12	24.8	0.8	Е	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP1	14:34	24.1	1.4	Ν	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP2	14:37	23.2	2.1	NW	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP3	14:40	25.8	1.1	Ν	Yes	1	Diesel	Generator	N/A
6-Dec-21	Sunny	OP4	14:44	24.4	2.5	Е	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP5	14:47	23.7	2.4	Е	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP6	14:50	25.7	0.8	NE	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP7	14:53	24.8	1.8	Ν	No	1	Wood Material	Worksite Constructing	N/A
6-Dec-21	Sunny	OP8	14:58	25.8	1.8	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP9	15:03	27.2	0.4	NE	Yes	1	Town gas	Town gas plant	N/A
6-Dec-21	Sunny	OP10	15:06	23.9	1.2	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP1	18:10	25.8	0.6	Ν	Yes	0	N/A	N/A	N/A
6-Dec-21	Fine	OP2	18:14	25.4	0.7	Ν	Yes	0	N/A	N/A	N/A
6-Dec-21	Fine	OP3	18:18	25.5	0.5	Е	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP4	18:21	25.3	1.3	Е	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP5	18:25	25.6	1.6	Е	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP6	18:28	25.6	0.7	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP7	18:33	25.2	1.4	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP8	18:37	25.5	0.5	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP9	18:41	25.7	0.5	Ν	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP10	18:45	24.9	0.6	Ν	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP1	10:33	26.3	1.4	Ν	Yes	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP2	10:37	26.1	3.1	Ν	Yes	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP3	10:40	27.1	0.6	S	No	1	Oil	Electric Generator	N/A
7-Dec-21	Sunny	OP4	10:44	26.6	0.7	Е	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP5	10:49	25.9	2.5	Е	No	0	Ň/A	N/A	Ń/A
7-Dec-21	Sunny	OP6	10:54	25.6	1.8	Ν	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP7	10:58	26.4	1.7	Ν	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
7-Dec-21	Sunny	OP8	11:03	26.1	1.2	N	No	1	Oil	Electric Generator	N/A
7-Dec-21	Sunny	OP9	11:07	26.3	1.8	N	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP10	11:11	26.8	1.4	N	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP1	14:39	23.9	0.6	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP2	14:41	23.3	3.2	S	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP3	14:44	23.6	0.6	Ν	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP4	14:47	23.5	1.2	Е	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP5	14:51	23.2	2.3	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP6	14:53	22.9	3.3	Е	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP7	14:56	23.7	2.2	S	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP8	14:59	24.2	1.2	S	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP9	15:02	24.5	2.7	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP10	15:06	24.3	2.2	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP1	18:37	24.8	1.6	Ν	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP2	18:41	24.6	1.9	Ν	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP3	18:45	24.5	2	W	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP4	18:49	23.9	1.3	W	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP5	18:53	24.2	2.5	NE	Yes	0	, N/A	N/A	N/A
7-Dec-21	Fine	OP6	18:56	24.9	0.9	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP7	19:00	25.4	1.3	S	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP8	19:04	25.2	0.7	S	No	1	Oil	Electric Generator	N/A
7-Dec-21	Fine	OP9	19:07	24.9	3.1	S	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP10	19:11	24.5	0.9	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP1	10:37	25.6	0.4	NW	Yes	1	grassy	Vegetation	N/A
8-Dec-21	Sunny	OP2	10:40	23.6	2.3	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP3	10:43	22.4	2.6	W	No	1	Diesel	Generator	N/A
8-Dec-21	Sunny	OP4	10:46	23.1	2.3	W	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP5	10:50	21.1	6.5	NE	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP6	10:52	22.2	2.7	Ν	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP7	10:55	22.4	1.9	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP8	10:59	22.9	1.1	Ν	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP9	11:02	23.2	1.7	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP10	11:05	22.8	1.4	Ν	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP1	14:32	25.9	1.3	NW	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP2	14:36	26.1	1.6	SE	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP3	14:40	25.9	2.1	NW	Yes	0	N/A	N/A	Ň/A
8-Dec-21	Sunny	OP4	14:43	26.9	1.6	W	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP5	14:47	25.8	2.7	NE	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
8-Dec-21	Sunny	OP6	14:50	25.3	1.8	SW	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP7	14:54	25.8	1.2	NW	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP8	14:57	26.1	1	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP9	15:01	25.3	2.7	Е	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP10	15:05	25.2	0.9	Ν	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP1	18:10	24.3	1.9	Ν	Yes	0	N/A	N/A	N/A
8-Dec-21	Fine	OP2	18:14	24.6	2.6	Ν	Yes	0	N/A	N/A	N/A
8-Dec-21	Fine	OP3	18:20	24.1	0.9	W	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP4	18:25	24.3	0.7	Е	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP5	18:31	24.4	1.5	NW	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP6	18:35	23.9	2	Ν	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP7	18:41	24.7	1.6	Ν	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP8	18:44	24.2	2.5	S	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP9	18:48	23.3	3.4	NE	Yes	0	N/A	N/A	N/A
8-Dec-21	Fine	OP10	18:53	23.2	2.3	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP1	10:35	27.1	0.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP2	10:39	27.2	0.7	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP3	10:43	24.9	3.2	W	No	1	Oil	Electric Generator	N/A
9-Dec-21	Sunny	OP4	10:47	25.3	1.3	Е	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP5	10:51	24.4	2.9	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP6	10:55	25.4	2.3	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP7	10:58	27.2	1.2	Ν	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP8	11:00	25.5	1.8	Ν	No	1	Acidic Gas	Town Gas Plant	N/A
9-Dec-21	Sunny	OP9	11:04	25.4	0.7	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP10	11:07	25.1	2.2	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP1	14:40	25.4	0.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP2	14:45	25.5	1.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP3	14:49	25.2	1.1	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP4	14:53	25.4	0.9	Е	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP5	14:57	27.3	0.7	Е	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP6	15:00	26.2	0.5	Ν	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP7	15:04	26.6	1.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP8	15:07	25.4	1.5	Ν	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP9	15:10	25.2	2.8	Ν	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP10	15:13	24.6	1.5	Е	Yes	0	N/A	N/A	N/A
9-Dec-21	Fine	OP1	18:03	26.1	0.5	Ν	Yes	0	N/A	N/A	N/A
9-Dec-21	Fine	OP2	18:07	25.8	0.5	S	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP3	18:11	25.6	0.4	Е	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature			From	Odour	Odour	Possible Source	Remarks
				(oC)	(m/s)	Direction	Project Site		Characteristic		
9-Dec-21	Fine	OP4	18:15	24.7	1.1	SE	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP5	18:20	25.1	1.8	Е	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP6	18:24	25.4	0.6	Ν	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP7	18:29	24.8	0.5	Ν	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP8	18:32	25.2	0.7	Ν	No	1	Acidic Gas	Town gas plant	N/A
9-Dec-21	Fine	OP9	18:36	25.9	0.2	Ν	No	1	Town gas	Town gas plant	N/A
9-Dec-21	Fine	OP10	18:40	24.8	1.1	Ν	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP1	10:39	23.1	2.9	Ν	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP2	10:42	24.3	1.6	SW	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP3	10:44	24.5	1.3	SW	No	1	Diesel	Generator	N/A
10-Dec-21	Sunny	OP4	10:47	23.4	1.3	NE	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP5	10:50	24.5	1.3	NE	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP6	10:52	23.9	1.8	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP7	10:54	24.4	2.3	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP8	10:58	24.8	1.6	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP9	11:03	24.4	3.7	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP10	11:05	24.6	1.1	SE	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP11	11:12	24.3	2.2	S	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP1	14:35	26.3	1.4	S	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP2	14:39	26.5	0.8	S	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP3	14:43	26.1	1.4	SW	No	1	Oil	Generator	N/A
10-Dec-21	Sunny	OP4	14:48	26.3	2.4	Е	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP5	14:50	25.3	3.1	Е	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP6	14:54	26.1	0.8	S	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP7	14:57	25.8	1.8	Ν	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP8	15:01	24.6	3.3	Ν	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP9	15:05	27	1.2	SW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP10	15:09	26.7	0.9	Е	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP11	15:21	27.4	2.7	Е	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP1	18:05	24.9	1.8	S	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP2	18:09	25.1	0.6	S	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP3	18:13	24.6	0.8	W	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP4	18:17	24.4	4.2	Е	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP5	18:20	24	3.4	Е	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP6	18:23	24.2	2.9	N	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP7	18:27	24.8	0.8	N	Yes	0	N/A	N/A	N/A
10-Dec-21	Fine	OP8	18:30	25.3	2.7	S	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP9	18:34	25.1	0.8	N	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature	-		From Project Site	Odour Interesity	Odour Characteristic	Possible Source	Remarks
10-Dec-21	Fine	OP10	18:38	(oC)	(m/s)	<b>Direction</b> N	No		N/A	N/A	NT / A
10-Dec-21 10-Dec-21	Fine	OP10 OP11	18:38 18:48	24.9 24.7	1.3 0.7	W	No Yes	0 0	N/A N/A	N/A N/A	N/A N/A
10-Dec-21 11-Dec-21		OP11 OP1	10:40	24.7 27.4	0.7 1.1	N	Yes	0	N/A	N/A N/A	N/A N/A
11-Dec-21 11-Dec-21	Sunny	OP1 OP2	10:35	27.4 28.1	0.7	N	Yes	0	N/A	N/A N/A	N/A N/A
11-Dec-21 11-Dec-21	Sunny	OP2 OP3	10:38	28.1 28.2	0.7 1.9	N NE	No	0	N/A	N/A N/A	N/A N/A
	Sunny	OP3 OP4		28.2 27.1		NE				-	•
11-Dec-21 11-Dec-21	Sunny	OP4 OP5	10:45 10:49	27.1 27.3	3.2 2.9		No No	0 0	N/A N/A	N/A	N/A
	Sunny			27.3 27.4	2.9	E E				N/A	N/A
11-Dec-21	Sunny	OP6 OP7	10:53	27.4 28.3		E S	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny		10:57		0.9		No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP8	11:00	28.5	0.4	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP9	11:04	28.0	2.2	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP10	11:07	27.6	3.2	N	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP11	11:20	28.8	1.8	E	No	1	Oil	Generator	N/A
11-Dec-21	Sunny	OP1	15:04	28.7	0.6	SW	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP2	15:08	26.4	2.3	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP3	15:12	26.2	1.3	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP4	15:15	27.4	1.2	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP5	15:19	26.4	2.6	E	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP6	15:23	27.1	1.3	E	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP7	15:27	28.5	0.6	SW	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP8	15:31	27.6	0.7	SE	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP9	15:34	28.1	1.3	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP10	15:38	26.1	2.9	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP11	15:50	26.2	3.3	SE	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP1	18:06	23.0	0.1	Ν	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP2	18:10	22.4	0.6	Ν	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP3	18:13	22.3	0.5	E	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP4	18:17	22.2	0.8	SE	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP5	18:21	22.1	1.9	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP6	18:24	21.9	1.0	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP7	18:27	21.9	0.7	Ν	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP8	18:31	21.0	1.1	Ν	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP9	18:34	20.9	1.8	Ν	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP10	18:37	21.4	0.6	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP11	18:45	22.6	1.1	NE	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP1	10:35	27.2	1.1	Ν	Yes	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP2	10:40	26.5	2.2	Ν	Yes	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP3	10:43	26.3	1.8	SW	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
12-Dec-21	Sunny	OP4	10:47	26.1	3.5	E	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP5	10:51	25.3	2.2	E	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP6	10:55	25.5	1.1	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP7	10:59	24.9	1.3	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP8	11:03	25.2	1.1	Ν	Yes	0	N/A	N/A	, N/A
12-Dec-21	Sunny	OP9	11:08	24.8	2.4	Ν	No	0	N/A	N/A	, N/A
12-Dec-21	Sunny	OP10	11:10	24.5	0.9	Е	Yes	0	N/A	N/A	Ň/A
12-Dec-21	Sunny	OP11	11:18	24.4	3.2	Е	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP1	15:46	24.4	3.1	S	No	0	N/A	N/A	, N/A
12-Dec-21	Sunny	OP2	15:41	24.5	0.7	S	No	0	, N/A	N/A	N/A
12-Dec-21	Sunny	OP3	15:37	24.7	0.8	SW	No	0	N/A	N/A	, N/A
12-Dec-21	Sunny	OP4	15:34	24.8	1.2	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP5	15:31	25.0	1.6	S	No	0	N/A	N/A	, N/A
12-Dec-21	Sunny	OP6	15:27	24.7	1.8	S	No	0	N/A	N/A	Ň/A
12-Dec-21	Sunny	OP7	15:24	25.1	2.7	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP8	15:19	25.7	1.7	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP9	15:14	26.1	2.2	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP10	15:10	25.3	1.1	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP11	15:01	25.5	2.5	Е	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP1	18:02	24.2	1.0	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP2	18:06	24.0	0.4	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP3	18:10	23.7	0.6	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP4	18:13	23.5	1.7	Е	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP5	18:17	23.6	1.3	Е	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP6	18:21	23.8	1.5	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP7	18:26	23.6	1.9	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP8	18:30	24.1	0.5	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP9	18:34	24.3	0.7	Ν	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP10	18:37	24.5	0.6	Ν	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP11	18:50	24.3	0.8	Е	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP1	10:46	21.0	2.4	Ν	Yes	1	Grassy	Vegetation	N/A
13-Dec-21	Sunny	OP2	10:50	21.1	2.1	Ν	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP3	10:53	23.4	0.8	Ν	Yes	1	Diesel	Generator	N/A
13-Dec-21	Sunny	OP4	10:55	22.2	1.6	NE	Yes	1	Leachate	Leachate Treatment Plant	N/A
13-Dec-21	Sunny	OP5	10:59	20.8	3.9	Е	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP6	11:01	20.1	4.8	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP7	11:04	21.3	4.4	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP8	11:07	20.6	2.2	NE	Yes	1	Diesel	Generator	N/A

Date	Weather	Location	Time	Temperature	_		From	Odour	Odour	Possible Source	Remarks
				(oC)	(m/s)	Direction	Project Site	,	Characteristic		
13-Dec-21	Sunny	OP9	11:11	20.2	2.2	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP10	11:13	21.0	1.6	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP11	11:30	22.3	1.6	S	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP1	14:35	24.3	1.3	S	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP2	14:40	24.5	1.5	S	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP3	14:44	24.7	1.5	SW	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP4	14:49	24.9	1.7	Е	No	1	Acidic	Slurry Truck	N/A
13-Dec-21	Sunny	OP5	14:53	25.3	1.2	Е	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP6	14:56	24.0	2.4	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP7	15:00	25.4	0.8	NW	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP8	15:04	25.2	1.1	Ν	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP9	15:07	24.5	2.0	Ν	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP10	15:10	24.7	0.9	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP11	15:20	23.6	1.6	Е	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP1	18:07	23.2	0.5	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP2	18:11	22.8	0.3	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP3	18:15	22.5	0.2	SE	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP4	18:19	22.6	0.7	Е	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP5	18:22	22.5	1.3	W	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP6	18:25	22.4	0.8	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP7	18:29	22.1	0.8	Ν	Yes	0	N/A	N/A	N/A
13-Dec-21	Fine	OP8	18:33	22.3	0.7	Ν	Yes	0	N/A	N/A	N/A
13-Dec-21	Fine	OP9	18:36	22.5	0.6	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP10	18:40	22.2	0.5	Ν	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP11	18:49	22.6	0.5	Ν	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP1	10:35	24.4	2.1	Ν	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP2	10:38	24.1	1.3	Ν	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP3	10:42	24.5	0.6	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP4	10:45	24.2	0.5	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP5	10:49	24.3	1.7	Е	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP6	10:52	24.8	0.4	Ν	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP7	10:55	25.1	2.1	Ν	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP8	10:58	25.2	1.4	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP9	11:01	25.4	0.7	N	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP10	11:04	25.2	2.6	N	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP11	11:14	25.3	3.2	E	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP1	14:37	24.8	1.3	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP2	14:40	23.1	3.1	S	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intonsity	Odour Characteristic	Possible Source	Remarks
14-Dec-21	Sunny	OP3	14:43	25.1	1.1	SW	No	0	N/A	N/A	N/A
14-Dec-21 14-Dec-21	Sunny	OP3 OP4	14:43 14:46	23.1 24.8	2.3	E	No	0	N/A	N/A N/A	N/A N/A
14-Dec-21 14-Dec-21	Sunny	OP5	14:40 14:49	24.0	2.2	S	No	0	N/A	N/A	N/A
14-Dec-21 14-Dec-21	Sunny	OP6	14.49 14:52	24.0 24.6	3.1	S	No	0	N/A	N/A	N/A
14-Dec-21 14-Dec-21	5	OP7	14.52 14:55	24.0 25.0	5.1 1.8	S	No	0	N/A	N/A	N/A
14-Dec-21 14-Dec-21	Sunny	OP7 OP8	14:55 14:59	25.0 25.0	2.9	S S	No		N/A	N/A N/A	N/A N/A
14-Dec-21 14-Dec-21	Sunny	OP8 OP9	14:59 15:03	23.0 24.2	2.9	E	Yes	0 1	Acidic	Town gas	N/A N/A
14-Dec-21 14-Dec-21	Sunny Sunny	OP10	15:03 15:08	24.2	2.4 1.3	SE	Yes	0	N/A	N/A	N/A
14-Dec-21 14-Dec-21	5	OP10 OP11	15:08 15:20	24.0	1.3 1.4	E	No	0	N/A	N/A	N/A
14-Dec-21 14-Dec-21	Sunny Fine	OP11 OP1	13:20 18:07	24.7 24.3	0.8	E S	No	0	N/A	N/A N/A	N/A N/A
		OP1 OP2		24.5 24.1	0.8	S S	No				
14-Dec-21	Fine		18:10					0	N/A	N/A	N/A
14-Dec-21 14-Dec-21	Fine Fine	OP3 OP4	18:15 18:19	23.7 23.4	0.5 0.9	E	No No	0 0	N/A	N/A	N/A N/A
	Fine	OP4 OP5		23.4 23.1		E E	No		N/A	N/A	
14-Dec-21			18:24		2.3			0	N/A	N/A	N/A
14-Dec-21	Fine	OP6	18:29	23.2	0.6	NE	Yes	0	N/A	N/A	N/A
14-Dec-21	Fine	OP7	18:33	23.1	1.3	S	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP8	18:37	23.3	0.8	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Fine	OP9	18:40	22.9	0.5	S	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP10	18:44	22.9	0.6	N	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP11	18:53	22.8	0.7	W	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP1	10:37	23.6	2.0	S	No	1	Grassy	Vegetation	N/A
15-Dec-21	Overcast	OP2	10:40	23.2	1.8	S	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP3	10:43	22.4	1.1	SW	No	1	Diesel	Generator	N/A
15-Dec-21	Overcast	OP4	10:46	22.1	2.5	E	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP5	10:50	22.4	3.8	E	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP6	10:55	22.2	3.4	SE	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP7	10:58	24.0	1.7	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP8	11:01	23.2	1.8	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP9	11:04	23.9	2.6	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP10	11:07	23.5	1.2	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP11	11:15	24.3	1.2	SW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP1	14:33	23.2	0.4	Ν	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP2	14:36	23.8	0.5	S	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP3	14:39	23.4	0.6	Ν	Yes	1	Oil	Generator	N/A
15-Dec-21	Overcast	OP4	14:43	23.9	1.4	Ε	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP5	14:47	23.3	2.4	Ε	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP6	14:51	22.8	3.0	Ν	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP7	14:55	23.2	2.5	Ν	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
15-Dec-21	Overcast	OP8	14:59	22.9	2.4	NE	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP9	15:02	23.5	2.3	Ν	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP10	15:05	23.6	0.9	Ν	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP11	15:13	23.3	1.1	SE	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP1	18:25	21.9	0.2	S	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP2	18:29	21.7	0.3	S	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP3	18:34	21.5	0.6	Е	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP4	18:38	21.6	1.8	Е	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP5	18:41	22.1	2.7	NE	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP6	18:43	22.3	1.4	Ν	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP7	18:45	21.7	0.8	Ν	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP8	18:48	22.2	2.2	Ν	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP9	18:52	23.0	1.3	Ν	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP10	18:55	22.8	0.6	Ν	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP11	19:04	21.4	0.6	Ν	No	0	N/A	N/A	N/A
l6-Dec-21	Fine	OP1	10:35	25.8	1.2	Ν	Yes	0	N/A	N/A	N/A
l6-Dec-21	Fine	OP2	10:39	25.7	2.5	SW	Yes	0	N/A	N/A	N/A
l6-Dec-21	Fine	OP3	10:43	25.9	0.6	Ν	Yes	1	Oil	Generator	N/A
16-Dec-21	Fine	OP4	10:47	25.4	3.2	Е	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP5	10:51	25.3	3.6	Е	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP6	10:54	25.4	1.1	Ν	Yes	0	N/A	N/A	N/A
l6-Dec-21	Fine	OP7	10:58	25.6	0.9	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP8	11:01	25.5	2.4	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP9	11:04	25.4	2.2	Ν	No	1	Acidic	Town gas	N/A
l6-Dec-21	Fine	OP10	11:07	25.6	1.8	Ν	No	0	N/A	N/A	N/A
l6-Dec-21	Fine	OP11	11:17	25.9	3.3	SE	No	0	N/A	N/A	N/A
l6-Dec-21	Overcast	OP1	14:41	24.5	1.5	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP2	14:44	24.7	0.6	S	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP3	14:47	24.2	1.3	Ν	Yes	1	Oil	Generator	N/A
16-Dec-21	Overcast	OP4	14:51	24.8	1.2	Е	No	0	N/A	N/A	N/A
l6-Dec-21	Overcast	OP5	14:54	25.2	2.2	Е	No	0	N/A	N/A	N/A
l6-Dec-21	Overcast	OP6	14:57	24.6	1.6	Ν	Yes	0	N/A	N/A	N/A
l6-Dec-21	Overcast	OP7	15:01	24.3	2.6	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP8	15:05	25.7	1.5	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP9	15:08	24.6	1.1	Ν	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP10	15:11	25.6	1.0	Ν	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP11	15:15	24.3	2.3	Е	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP1	18:15	23.2	1.8	Ν	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
16-Dec-21	Fine	OP2	18:19	23.4	1.2	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP3	18:23	22.9	1.4	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP4	18:26	23.1	1.8	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP5	18:30	23.3	1.2	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP6	18:33	22.9	1.1	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP7	18:37	22.8	1.3	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP8	18:41	22.9	1.9	Ν	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP9	18:45	23.0	1.6	Ν	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP10	18:48	22.1	2.3	Ν	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP11	18:56	23.2	0.8	Ν	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP1	10:42	23.9	2.9	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP2	10:45	23.2	3.2	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP3	10:48	23.3	1.7	Ν	Yes	1	Oil	Generator	N/A
17-Dec-21	Fine	OP4	10:51	24.1	1.2	NE	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP5	10:54	23.5	0.6	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP6	10:57	23.2	4.1	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP7	11:00	23.1	3.7	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP8	11:04	23.2	4.2	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP9	11:06	22.9	3.5	Ν	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP10	11:08	23.5	0.7	Ν	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP11	11:21	24.2	0.7	Е	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP1	14:37	22.3	4.0	NW	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP2	14:39	21.9	5.3	NW	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP3	14:42	22.9	2.1	NE	No	1	Diesel	Generator	N/A
17-Dec-21	Fine	OP4	14:45	22.8	2.5	NE	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP5	14:48	22.4	3.8	NE	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP6	14:50	22.1	3.5	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP7	14:55	22.6	4.8	NW	No	1	Burnt	Welding	N/A
17-Dec-21	Fine	OP8	14:59	22.8	2.6	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP9	15:02	22.2	2.2	Ν	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP10	15:04	22.9	0.7	Ν	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP11	15:12	21.6	5.1	Е	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP1	18:20	21.1	7.2	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP2	18:23	21.4	1.8	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP3	18:27	21.3	3.1	Ν	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP4	18:30	21.4	0.8	NE	Yes	1	Acidic	Leachate Treatment Plant	
17-Dec-21	Fine	OP5	18:33	21.2	3.2	Е	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP6	18:37	21.1	4.2	Ν	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
17-Dec-21	Fine	OP7	18:41	21.3	3.4	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP8	18:44	21.0	4.3	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP9	18:47	21.9	2.2	Ν	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP10	18:51	22.0	1.9	NW	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP11	19:07	21.2	3.8	SE	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP1	10:50	19.1	4.3	Ν	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP2	10:54	20.2	3.0	Ν	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP3	10:59	22.0	2.2	SW	No	1	Oil	Generator	N/A
18-Dec-21	Sunny	OP4	11:03	23.6	1.2	Е	No	1	Leachate	Leachate Treatment Plant	-
18-Dec-21	Sunny	OP5	11:07	21.2	4.1	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP6	11:11	19.3	2.7	Ν	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP7	11:15	19.2	2.4	Ν	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP8	11:19	19.3	1.8	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP9	11:23	19.4	2.5	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP10	11:27	21.2	1.6	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP11	11:40	20.8	2.1	Е	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP1	14:40	21.9	2.1	Ν	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP2	14:44	22.2	1.3	NW	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP3	14:48	25.9	1.7	NE	No	1	Oil	Generator	N/A
18-Dec-21	Sunny	OP4	14:52	26.7	0.8	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP5	14:55	25.5	1.9	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP6	14:59	23.1	2.7	Ν	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP7	15:03	22.7	3.9	Ν	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP8	15:06	21.4	3.0	Ν	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP9	15:10	22.8	1.8	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP10	15:13	22.1	2.7	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP11	15:23	23.3	1.4	Е	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP1	18:06	18.8	1.7	Ν	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP2	18:09	18.9	2.5	Ν	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP3	18:13	19.1	1.4	NW	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP4	18:17	19.0	2.1	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP5	18:20	19.4	0.7	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP6	18:24	19.7	2.1	Ν	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP7	18:28	19.3	2.3	Ν	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP8	18:32	19.1	2.2	NW	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP9	18:36	19.3	1.2	NW	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP10	18:39	19.6	0.5	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP11	18:48	19.2	1.5	SE	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature		Wind Direction	From Project Site	Odour Intoncity	Odour Characteristic	Possible Source	Remarks
10 D 01	C	OP1	10.04	(oC)	(m/s)		,			NT / A	
19-Dec-21	Sunny	OP1 OP2	10:34	19.6 20.1	1.6	NW	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP2 OP3	10:38	20.1 21.0	0.1	S	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP3 OP4	10:42		0.6	E	No	0	N/A	N/A	N/A
19-Dec-21	Sunny		10:45	21.3	1.2	E	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP5	10:48	21.7	1.3	NW	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP6	10:52	21.4	1.5	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP7	10:55	20.5	3.1	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP8	10:59	20.1	1.8	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP9	11:04	21.1	2.6	NW	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP10	11:07	21.9	1.1	NW	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP11	11:13	21.9	2.3	Ε	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP1	15:52	20.7	0.9	S	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP2	15:47	20.6	1.4	S	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP3	15:43	20.6	1.6	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP4	15:39	20.9	2.1	E	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP5	15:34	22.4	1.8	SE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP6	15:29	22.1	1.1	SE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP7	15:24	20.9	4.3	Ν	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP8	15:20	21.1	3.8	Ν	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP9	15:15	20.7	0.8	NE	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP10	15:11	21.0	1.8	Е	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP11	15:06	23.1	1.0	Ν	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP1	18:06	19.6	1.3	Ν	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP2	18:10	19.8	0.4	SE	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP3	18:13	19.8	0.5	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP4	18:17	20.0	0.8	Е	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP5	18:21	19.7	1.7	Е	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP6	18:24	19.6	1.4	Ν	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP7	18:28	19.8	1.5	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP8	18:32	19.5	1.2	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP9	18:36	19.9	1.2	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP10	18:40	19.8	1.3	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP11	18:49	19.9	0.5	SE	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP1	10:15	14.9	2.0	NW	Yes	0	N/A	N/A	N/A
20-Dec-21 20-Dec-21	Shower	OP2	10:37	14.9	1.0	NW	Yes	0	N/A	N/A	N/A
20-Dec-21 20-Dec-21	Shower	OP3	10:30	14.8	0.6	NE	No	1	Diesel	Generator	N/A
20-Dec-21 20-Dec-21	Shower	OP4	10:41	14.8	1.7	N	Yes	0	N/A	N/A	N/A
20-Dec-21 20-Dec-21	Shower	OP5	10:44	15.5	1.7	E	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
20-Dec-21	Shower	OP6	10:48	15.2	2.4	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP7	10:50	15.0	3.8	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP8	10:52	14.6	3.6	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP9	10:54	14.7	1.6	N	No	0	N/A	N/A	N/A
20-Dec-21	Shower	OP10	10:56	14.5	3.2	NE	No	0	N/A	N/A	N/A
20-Dec-21	Shower	OP11	11:03	15.2	1.3	E	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP1	14:33	15.3	2.0	Ν	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP2	14:37	15.6	0.8	Ν	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP3	14:40	16.2	0.4	NE	Yes	1	Oil	Generator	N/A
20-Dec-21	Overcast	OP4	14:43	15.9	1.4	Е	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP5	14:46	14.8	1.2	Е	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP6	14:48	15.1	2.1	NE	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP7	14:51	16.2	1.5	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP8	14:53	15.7	1.8	Ν	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP9	14:56	16.2	1.2	Ν	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP10	14:58	15.8	0.7	Ν	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP11	15:07	16.1	1.0	Е	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP1	18:05	15.6	1.3	Ν	Yes	0	, N/A	N/A	N/A
20-Dec-21	Rainy	OP2	18:09	15.8	0.2	S	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP3	18:12	15.1	0.5	S	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP4	18:16	15.3	0.8	Е	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP5	18:20	15.7	0.5	Е	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP6	18:23	15.1	1.2	Ν	Yes	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP7	18:26	15.3	1.6	Ν	Yes	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP8	18:30	15.6	1.2	Ν	Yes	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP9	18:33	16.0	0.4	Ν	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP10	18:37	15.7	0.5	Ν	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP11	18:47	15.3	0.6	Ν	No	0	N/A	N/A	N/A
21-Dec-21	Shower	OP1	10:34	17.1	3.3	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP2	10:38	17.4	4.2	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP3	10:42	17.1	1.8	Ν	Yes	1	Oil	Generator	N/A
21-Dec-21	Shower	OP4	10:44	17.2	1.4	Ν	Yes	1	Acidic	Leachate Treatment Plant	
21-Dec-21	Shower	OP5	10:47	17.0	1.8	NW	No	0	N/A	N/A	N/A
21-Dec-21	Shower	OP6	10:50	16.8	3.5	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP7	10:53	16.5	3.3	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP8	10:55	16.8	2.3	Ν	Yes	1	Oil	Generator	N/A
21-Dec-21	Shower	OP9	10:57	17.9	0.9	Ν	No	0	N/A	N/A	N/A
21-Dec-21	Shower	OP10	11:00	17.1	1.8	Ν	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
21-Dec-21	Shower	OP11	11:09	17.5	1.5	E	No	0	N/A	N/A	N/A
21-Dec-21 21-Dec-21	Overcast	OP1	14:58	19.7	0.9	NW	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP2	15:03	18.7	1.0	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP3	15:07	19.9	0.5	N	Yes	1	Oil	Generator	N/A
21-Dec-21	Overcast	OP4	15:11	20.0	1.1	E	No	1	Acidic Gas	Leachate Treatment Plant	
21-Dec-21	Overcast	OP5	15:15	18.8	1.8	NW	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP6	15:19	18.6	1.8	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP7	15:22	18.1	1.7	Ν	Yes	0	N/A	N/A	Ń/A
21-Dec-21	Overcast	OP8	15:25	18.8	0.8	Ν	Yes	0	N/A	N/A	Ń/A
21-Dec-21	Overcast	OP9	15:30	18.4	2.6	NW	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP10	15:33	18.3	0.7	NW	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP11	15:43	18.4	1.1	Е	No	0	N/A	N/A	Ń/A
21-Dec-21	Overcast	OP1	18:45	17.5	0.8	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP2	18:48	17.4	0.9	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP3	18:50	17.0	1.2	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP4	18:52	17.2	0.7	Е	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP5	18:55	16.9	0.7	Е	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP6	18:59	17.0	2.9	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP7	19:02	17.9	2.5	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP8	19:05	17.5	1.2	Ν	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP9	19:09	17.8	0.3	Ν	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP10	19:13	18.0	1.4	NE	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP11	19:23	18.1	3.4	Е	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP1	10:38	19.3	2.4	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP2	10:41	19.7	2.8	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP3	10:45	19.8	1.5	NE	No	1	Oil	Generator	N/A
22-Dec-21	Overcast	OP4	10:48	19.7	1.2	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP5	10:52	19.8	1.9	Ν	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP6	10:54	20.4	2.8	Ν	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP7	10:57	20.5	2.4	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP8	11:00	20.5	2.3	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP9	11:04	20.8	2.4	Ν	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP10	11:09	20.9	1.4	Ν	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP11	11:22	22.3	2.1	SW	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP1	14:30	22.6	1.0	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP2	14:33	22.2	1.3	NW	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP3	14:36	23.6	0.5	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP4	14:38	23.4	1.4	Е	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature	-		From Project Site	Odour Interesity	Odour Characteristic	Possible Source	Remarks
00 D 01		ODE	1 4 4 1	(oC)	(m/s)	Direction	Project Site	5	Characteristic	NT / A	NT / A
22-Dec-21	Overcast	OP5	14:41	22.3	1.0	E	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP6	14:43	22.3	0.9	S	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP7	14:46	22.7	0.9	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP8	14:49	22.7	0.8	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP9	14:51	22.5	1.5	SE	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP10	14:54	22.6	0.9	NE	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP11	15:04	21.4	1.5	SE	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP1	18:20	18.5	1.1	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP2	18:24	18.5	0.7	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP3	18:28	18.1	2.1	W	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP4	18:31	18.9	0.4	W	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP5	18:34	18.7	1.3	Е	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP6	18:37	18.3	2.4	Ν	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP7	18:40	18.6	1.7	Ν	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP8	18:44	18.5	1.4	NE	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP9	18:48	18.6	0.5	Ν	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP10	18:51	18.7	0.5	Ν	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP11	19:10	18.4	1.2	NE	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP1	10:30	22.1	3.3	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP2	10:33	22.5	0.7	S	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP3	10:37	22.3	1.4	Ν	Yes	1	Oil	Electric Generator	N/A
23-Dec-21	Overcast	OP4	10:41	22.6	2.8	Е	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP5	10:45	22.4	3.6	Е	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP6	10:48	22.3	3.4	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP7	10:51	22.2	2.1	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP8	10:54	22.3	2.8	Ν	Yes	1	Oil	Electric Generator	N/A
23-Dec-21	Overcast	OP9	10:59	22.6	1.2	Ν	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP10	11:03	22.5	1.5	N	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP11	11:14	22.8	1.9	W	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP1	14:40	23.3	1.6	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP2	14:45	22.8	1.4	S	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP3	14:48	21.4	0.5	N	Yes	1	Oil	Electric Generator	N/A
23-Dec-21	Overcast	OP4	14:51	20.8	2.3	E	No	0	N/A	N/A	N/A
23-Dec-21 23-Dec-21	Overcast	OP5	14:54	20.0	1.3	E	No	0	N/A	N/A	N/A
23-Dec-21 23-Dec-21	Overcast	OP6	14:54 14:57	21.2	2.2	S	No	0	N/A	N/A N/A	N/A
23-Dec-21 23-Dec-21	Overcast	OP8 OP7	14:57 15:01	21.0	1.2	5 N	Yes	0	N/A	N/A N/A	N/A N/A
23-Dec-21 23-Dec-21		OP7 OP8	15:01 15:04	21.2 21.0	0.8		Yes		N/A	N/A N/A	N/A N/A
23-Dec-21 23-Dec-21	Overcast	OP8 OP9	15:04 15:07	21.0 21.4	0.8 1.3	N SE	Yes	0 0			N/A N/A
25-Dec-21	Overcast	OF9	13:07	∠1.4	1.3	5Ľ	res	0	N/A	N/A	IN/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
23-Dec-21	Overcast	OP10	15:11	21.5	0.4	N	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP11	15:23	21.9	0.7	NE	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP1	18:05	18.5	0.5	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP2	18:09	18.1	0.4	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP3	18:13	17.6	0.4	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP4	18:17	17.8	0.6	Е	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP5	18:20	18.0	0.7	Е	No	0	Ń/A	N/A	N/A
23-Dec-21	Overcast	OP6	18:24	18.1	0.7	Е	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP7	18:27	18.2	0.6	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP8	18:31	18.3	0.4	Ν	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP9	18:35	18.0	0.6	Ν	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP10	18:40	17.8	0.5	Ν	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP11	18:52	18.5	0.5	NE	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP1	10:40	20.3	0.4	N	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP2	10:44	20.0	0.0	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP3	10:47	19.9	0.6	Ń	Yes	1	Oil	Electric Generator	N/A
24-Dec-21	Overcast	OP4	10:50	20.1	0.7	Ν	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP5	10:54	20.0	0.9	Е	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP6	10:58	20.1	0.4	S	No	0	Ń/A	N/A	N/A
24-Dec-21	Overcast	OP7	11:02	19.7	0.6	Ν	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP8	11:05	19.9	0.8	Ν	Yes	1	Oil	Electric Generator	N/A
24-Dec-21	Overcast	OP9	11:08	20.4	0.0	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP10	11:12	21.0	0.9	N	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP11	11:22	20.5	1.3	Е	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP1	14:38	22.0	0.0	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP2	14:41	21.6	1.2	S	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP3	14:43	22.3	0.7	SW	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP4	14:45	23.7	0.0	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP5	14:47	23.1	0.5	SW	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP6	14:49	22.3	1.3	S	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP7	14:52	22.1	2.2	S	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP8	14:55	22.9	0.9	S	No	1	Diesel	Generator	N/A
24-Dec-21	Overcast	OP9	14:58	22.1	1.3	S	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP10	14:59	22.1	1.9	S	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP11	15:07	22.2	0.0	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP1	18:00	19.0	0.4	Ń	Yes	0	Ń/A	N/A	Ň/A
24-Dec-21	Overcast	OP2	18:03	19.1	0.0	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP3	18:07	19.4	0.0	N/A	N/A	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
24-Dec-21	Overcast	OP4	18:10	18.8	0.4	N	Yes	0	N/A	N/A	N/A
24-Dec-21 24-Dec-21	Overcast	OP5	18:10 18:14	18.7	0.4	N	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP6	18:17	18.8	0.3	N	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP7	18:21	18.5	0.7	N	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP8	18:25	18.6	0.4	N	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP9	18:29	18.3	0.4	N	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP10	18:33	18.1	0.5	N	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP11	18:44	17.6	0.6	E	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP1	11:00	20.5	1.3	S	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP2	11:03	20.7	2.3	S	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP3	11:07	20.2	2.9	W	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP4	11:10	21.1	3.9	E	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP5	11:14	21.3	3.5	E	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP6	11:17	21.1	4.1	E	Yes	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP7	11:20	22.7	1.4	S	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP8	11:23	22.9	1.4	S	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP9	11:25	22.8	1.2	N	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP10	11:28	22.3	1.6	NE	Yes	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP11	11:40	23.3	0.6	N	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP1	14:50	22.1	1.3	S	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP2	14:53	21.4	0.6	Ν	Yes	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP3	14:57	20.3	1.4	SW	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP4	15:00	20.0	1.3	Е	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP5	15:04	19.8	3.2	Е	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP6	15:08	19.7	1.8	Ν	Yes	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP7	15:12	20.6	1.4	S	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP8	15:16	20.8	1.5	Ν	Yes	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP9	15:20	20.1	1.4	Ν	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP10	15:23	20.2	0.6	Ν	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP11	15:35	19.5	0.9	S	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP1	18:00	19.5	0.6	Ν	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP2	18:03	18.8	0.7	S	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP3	18:07	18.2	0.4	Ν	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP4	18:10	18.1	0.5	Е	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP5	18:13	18.0	0.6	Е	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP6	18:15	17.8	1.0	S	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP7	18:18	17.5	0.9	Ν	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP8	18:21	17.5	0.6	Ν	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
25-Dec-21	Fine	OP9	18:25	17.4	1.8	Е	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP10	18:29	17.5	1.9	Ν	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP11	18:41	17.2	2.9	NE	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP1	10:40	15.7	1.7	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP2	10:43	16.6	1.3	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP3	10:47	16.5	1.2	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP4	10:51	16.7	1.4	Е	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP5	10:54	15.6	2.3	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP6	10:58	16.0	1.7	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP7	11:02	16.1	2.7	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP8	11:06	15.7	3.7	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP9	11:10	15.2	2.0	Ν	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP10	11:13	15.8	3.1	Ν	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP11	11:21	15.6	0.7	Е	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP1	15:22	14.4	1.7	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP2	15:19	14.3	3.3	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP3	15:15	14.8	2.3	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP4	15:12	15.4	0.6	Е	No	1	Acidic	Leachate Treatment Plant	N/A
26-Dec-21	Shower	OP5	15:07	14.9	1.9	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP6	15:03	15.1	1.4	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP7	14:59	14.8	2.6	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP8	14:55	14.9	3.3	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP9	14:51	15.2	2.3	Ν	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP10	14:47	15.7	2.1	Ν	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP11	14:39	15.4	1.1	Е	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP1	18:02	13.2	2.8	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP2	18:06	13.3	4.2	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP3	18:11	13.2	1.4	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP4	18:14	13.1	2.4	NE	No	1	Acidic	Leachate Treatment Plant	N/A
26-Dec-21	Shower	OP5	18:17	13.0	3.3	Е	No	0	N/A	N/A	N/A
6-Dec-21	Shower	OP6	18:21	12.9	4.3	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP7	18:25	12.5	5.1	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP8	18:29	12.4	6.3	Ν	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP9	18:33	12.3	2.7	Ν	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP10	18:37	12.4	3.5	Ν	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP11	18:46	12.2	1.1	Е	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP1	10:50	13.0	2.2	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP2	10:53	14.0	1.2	Ν	Yes	0	N/A	N/A	, N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
27-Dec-21	Overcast	OP3	10:56	14.1	1.7	NE	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP4	10:59	14.3	1.1	W	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP5	11:03	14.8	2.2	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP6	11:07	14.6	3.0	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP7	11:10	13.3	2.7	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP8	11:14	12.8	4.9	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP9	11:17	13.7	1.7	Ν	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP10	11:21	13.8	3.2	Ν	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP11	11:34	14.4	0.8	SW	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP1	14:38	13.8	3.5	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP2	14:41	14.1	2.6	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP3	14:45	14.6	1.5	NE	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP4	14:48	14.8	1.7	Е	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP5	14:52	14.4	1.9	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP6	14:55	14.5	2.4	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP7	14:59	14.1	2.6	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP8	15:02	14.4	2.0	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP9	15:06	14.6	1.3	Ν	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP10	15:09	14.8	1.3	Ν	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP11	15:20	14.7	1.4	SW	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP1	18:05	12.2	1.8	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP2	18:08	12.3	1.7	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP3	18:11	12.1	2.3	NE	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP4	18:15	12.3	1.5	Е	No	1	Leachate	Leachate Treatment Plant	
27-Dec-21	Overcast	OP5	18:18	12.2	1.3	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP6	18:22	11.9	2.8	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP7	18:25	11.7	3.7	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP8	18:29	11.6	3.5	Ν	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP9	18:33	11.8	2.5	Ν	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP10	18:36	11.9	2.6	Ν	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP11	18:48	11.4	2.3	Е	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP1	10:30	16.5	2.8	Ν	Yes	0	N/A	N/A	N/A
28-Dec-21	Fine	OP2	10:33	16.7	1.6	Ν	Yes	0	N/A	N/A	N/A
28-Dec-21	Fine	OP3	10:36	16.8	2.3	Е	No	1	Oil	Electric Generator	N/A
28-Dec-21	Fine	OP4	10:40	16.5	1.8	Е	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP5	10:43	16.7	2.2	Ν	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP6	10:47	16.6	2.4	Ν	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP7	10:51	16.4	2.6	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
28-Dec-21	Fine	OP8	10:55	16.5	3.1	N	Yes	0	N/A	N/A	N/A
28-Dec-21	Fine	OP9	10:59	16.7	1.3	N	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP10	11:03	16.4	2.5	N	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP11	11:13	16.8	1.7	E	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP1	14:43	19.9	1.3	S	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP2	14:48	18.1	2.7	S	No	1	Diesel	Vehicle	N/A
28-Dec-21	Overcast	OP3	14:51	19.3	0.4	SW	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP4	14:54	19.2	0.4	W	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP5	14:57	18.6	1.4	SE	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP6	15:00	18.3	2.5	S	No	1	Diesel	Vehicle	N/A
28-Dec-21	Overcast	OP7	15:03	19.8	2.5	S	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP8	15:06	21.3	0.9	SW	No	1	Sludge	Vehicle	N/A
28-Dec-21	Overcast	OP9	15:10	20.2	0.9	S	No	1	Town gas	Town gas plant	N/A
28-Dec-21	Overcast	OP10	15:12	19.7	0.7	S	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP11	15:21	19.3	1.1	SE	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP1	18:10	16.0	1.1	N	Yes	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP2	18:13	15.9	0.5	N	Yes	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP3	18:17	15.4	0.8	NE	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP4	18:21	15.5	0.8	Е	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP5	18:25	15.6	1.2	Е	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP6	18:29	15.5	1.2	Ν	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP7	18:33	15.4	0.8	Ν	Yes	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP8	18:37	15.2	1.3	Ν	Yes	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP9	18:41	15.2	1.1	Ν	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP10	18:45	15.4	1.0	Ν	No	0	N/A	N/A	N/A
28-Dec-21	Overcast	OP11	18:44	14.8	1.2	NE	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP1	10:37	23.4	0.4	NE	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP2	10:40	21.4	2.3	S	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP3	10:42	21.1	1.3	SW	No	1	Diesel	Generator	N/A
29-Dec-21	Fine	OP4	10:45	21.3	0.8	Е	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP5	10:49	21.7	0.5	W	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP6	10:52	22.8	1.2	SE	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP7	10:55	22.3	0.8	NE	Yes	0	N/A	N/A	N/A
29-Dec-21	Fine	OP8	10:58	21.9	1.7	Ν	Yes	0	N/A	N/A	N/A
29-Dec-21	Fine	OP9	11:01	22.2	1.3	Ν	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP10	11:04	23.4	0.4	Ν	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP11	11:12	21.8	2.4	SE	No	1	Soil/Sand	Ground	N/A
29-Dec-21	Sunny	OP1	14:31	23.1	2.1	S	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intonsity	Odour Characteristic	Possible Source	Remarks
29-Dec-21	Sunny	OP2	14:34	23.7	2.6	S	No	1	Oil	Vehicle	N/A
29-Dec-21 29-Dec-21	Sunny	OP2 OP3	14.34 14:37	23.7 24.1	2.0 1.6	S N	Yes	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Sunny	OP4	14:40	24.5	0.9	N	Yes	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Sunny	OP5	14:40	23.5	0.8	W	No	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Sunny	OP6	14:44	23.0	1.3	S	No	0	Sludge	Sewer	N/A
29-Dec-21 29-Dec-21	Sunny	OP7	14:52	24.2	1.5	S	No	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Sunny	OP8	14:55	24.6	1.6	S	No	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Sunny	OP9	14:59	24.5	2.7	S	No	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Sunny	OP10	15:03	25.4	1.4	S	No	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Sunny	OP11 OP11	15:15	24.6	1.4	SW	Yes	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP1	18:00	18.6	0.6	N	Yes	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP2	18:00 18:03	18.3	0.0	N	Yes	0	N/A	N/A N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP2 OP3	18.03 18:07	18.5	0.4	NE	No	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP4	18:10	17.9	0.5	E	No	0	N/A	N/A N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP5	18:10 18:14	18.2	2.1	N	No	0	N/A	N/A N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP6	18:14 18:17	18.3	1.4	N	No	0 1	Diesel	Vehicle	N/A
29-Dec-21 29-Dec-21	Fine	OP7	18:17 18:21	18.5	1.4 1.7	N	Yes	1	Diesel	Vehicle	N/A N/A
29-Dec-21 29-Dec-21	Fine	OP8	18:25	17.9	1.7	N	Yes	0	N/A	N/A	N/A N/A
29-Dec-21 29-Dec-21	Fine	OP9	18.25 18:29	17.8	0.4	N	No	0	N/A	N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP10	18:34	17.9	0.4	N	No	0	N/A	N/A N/A	N/A
29-Dec-21 29-Dec-21	Fine	OP10 OP11	18.34 18:45	17.0	0.9	NE	No	0	N/A	N/A	N/A N/A
30-Dec-21	Sunny	OP1	10:45	18.5	0.8 3.1	N	Yes	0	N/A	N/A	N/A
30-Dec-21 30-Dec-21	5	OP1 OP2	10:35	18.5	0.8	N	Yes	0	N/A	N/A	N/A
30-Dec-21 30-Dec-21	Sunny	OP2 OP3	10:39	18.7	0.8	S	No	0	N/A N/A	N/A N/A	N/A N/A
30-Dec-21	Sunny	OP4	10:42	18.4	0.4 2.1	E	No	0	N/A	N/A	N/A N/A
30-Dec-21 30-Dec-21	Sunny	OP5	10:45	18.5	3.8	E	No		N/A	N/A	N/A
30-Dec-21 30-Dec-21	Sunny	OP6	10:48 10:52	18.5	3.8 1.2	L N	No	0 0	N/A	N/A	N/A N/A
30-Dec-21	Sunny	OP7	10:52	19.0	1.2	N	Yes	0	N/A	N/A	N/A N/A
30-Dec-21 30-Dec-21	Sunny Sunny	OP8	10.55 10:59	19.0	1.2	N	Yes	0	N/A	N/A	N/A
30-Dec-21 30-Dec-21	Sunny	OP9	10.59	19.1	1.0	N	No	0	N/A	N/A	N/A
30-Dec-21	5	OP10	11:05 11:06	19.0	0.6	N	No	0	N/A	N/A N/A	N/A
30-Dec-21 30-Dec-21	Sunny Sunny	OP10 OP11	11:06 11:16	19.2 19.4	0.8 1.6	E	No	0	N/A	N/A N/A	N/A N/A
30-Dec-21 30-Dec-21	5	OP11 OP1	11:16	19.4 21.1	1.6 1.4	E W	No Yes	0	N/A N/A	N/A N/A	N/A N/A
30-Dec-21 30-Dec-21	Sunny	OP1 OP2	14:35 14:39	21.1 22.7	1.4 1.3	vv S	No	0	N/A N/A	N/A N/A	N/A N/A
30-Dec-21 30-Dec-21	Sunny	OP2 OP3		22.7	1.3 0.9	S SE	No			-	
30-Dec-21 30-Dec-21	Sunny	OP3 OP4	14:43 14:47	22.2 21.4	0.9 1.2		No No	0 0	N/A	N/A N/A	N/A N/A
30-Dec-21 30-Dec-21	Sunny	OP4 OP5	14:47 14:51	21.4 21.3	1.2 2.3	E E	No No		N/A Oil	N/A Excavator	N/A N/A
	Sunny			21.3 21.0	2.3	E E		1 0			
30-Dec-21	Sunny	OP6	14:55	21.0	2.2	Е	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
30-Dec-21	Sunny	OP7	14:59	21.1	1.6	S	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP8	15:03	21.4	3.3	S	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP9	15:08	21.3	1.1	Е	Yes	1	Town gas	Town gas plant	N/A
30-Dec-21	Sunny	OP10	15:12	21.6	1.8	Е	Yes	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP11	15:23	21.1	1.5	Е	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP1	18:00	18.2	0.6	NW	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP2	18:03	18.1	0.4	Ν	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP3	18:07	17.3	1.6	W	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP4	18:11	17.0	3.0	Е	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP5	18:15	17.1	1.3	Е	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP6	18:19	16.9	1.5	Е	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP7	18:22	16.8	1.1	Ν	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP8	18:25	16.9	0.5	Ν	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP9	18:29	16.7	1.7	Ν	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP10	18:34	16.8	1.4	Ν	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP11	18:45	16.7	0.8	W	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP1	10:50	18.8	0.9	Ν	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP2	10:54	18.3	1.3	S	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP3	10:59	18.0	1.2	Ν	Yes	1	Oil	Generator	N/A
31-Dec-21	Overcast	OP4	11:04	18.1	3.1	Е	No	1	Oil	Vehicle	N/A
31-Dec-21	Overcast	OP5	11:08	18.8	2.8	Е	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP6	11:11	18.5	2.1	Ν	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP7	11:15	18.1	1.9	Ν	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP8	11:19	17.9	2.1	Е	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP9	11:23	18.7	0.7	Ν	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP10	11:27	18.1	2.2	Ν	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP11	11:38	18.0	1.9	Е	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP1	14:40	20.9	0.5	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP2	14:43	18.4	3.6	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP3	14:46	19.0	1.9	SW	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP4	14:48	19.9	1.3	SE	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP5	14:51	20.1	2.8	NE	Yes	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP6	14:53	20.6	0.8	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP7	14:56	20.5	1.1	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP8	14:59	20.3	1.0	SW	No	1	Exhaust Gas	Vehicle	N/A
31-Dec-21	Sunny	OP9	15:03	21.0	1.0	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP10	15:05	19.7	1.1	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP11	15:13	19.7	1.9	SE	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature	Wind Speed	Wind	From	Odour	Odour	Possible Source	Remarks
				(oC)	(m/s)	Direction	Project Site	Intensity	Characteristic		
31-Dec-21	Fine	OP1	18:05	15.6	1.5	Ν	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP2	18:08	15.7	0.6	Ν	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP3	18:11	15.4	0.9	SE	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP4	18:15	15.3	1.0	W	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP5	18:19	15.1	1.4	E	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP6	18:23	15.0	1.3	Ν	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP7	18:26	15.2	1.1	W	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP8	18:30	15.3	1.7	Е	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP9	18:34	15.4	1.5	SE	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP10	18:38	15.5	0.5	Е	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP11	18:49	15.2	1.5	Ν	No	0	N/A	N/A	N/A

Annex D7

Thermal Oxidizer, Landfill Gas Flare and Landfill Gas Generator Stack Emission Monitoring Results

Parameters	Monitoring Results	
NO <sub>2</sub>	0.38 gs <sup>-1</sup>	
CO	<0.02 gs <sup>-1</sup>	
SO <sub>2</sub>	<0.01 gs <sup>-1</sup>	
Benzene	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>	
Vinyl chloride	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>	
Exhaust gas velocity	15.3 ms <sup>-1</sup>	

### Table D7.1 Thermal Oxidiser Stack Emission Monitoring Results

### Table D7.2Thermal Oxidiser Stack Continuous Monitoring Results

Date		Gas Combustion	Exhaust temperature	Exhaust gas velocity
		Temperature (°C)	(K)	(ms <sup>-1</sup> ) <sup>(a)</sup>
01 Dec 21		945	1235	
02 Dec 21		938	1226	
03 Dec 21		984	1316	
04 Dec 21		941	1264	
05 Dec 21		941	1223	
06 Dec 21		944	1237	
07 Dec 21		936	1238	
08 Dec 21		939	1234	
09 Dec 21		949	1253	
10 Dec 21		955	1270	
11 Dec 21		936	1230	
12 Dec 21		932	1231	
13 Dec 21		948	1219	
14 Dec 21		952	1272	
15 Dec 21		942	1226	15.3
16 Dec 21		937	1222	
17 Dec 21		936	1224	
18 Dec 21		957	1221	
19 Dec 21		941	1226	
20 Dec 21		944	1230	
21 Dec 21		938	1241	
22 Dec 21		942	1219	
23 Dec 21		943	1230	
24 Dec 21		935	1223	
25 Dec 21		938	1229	
26 Dec 21		937	1223	
27 Dec 21		967	1287	
28 Dec 21		936	1223	
29 Dec 21		936	1225	
30 Dec 21		937	1221	
31 Dec 21		941	1228	
	Average	943	1237	-
	Min		1219	-
	Max	984	1316	-

#### Notes:

(a) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring.

Table D7.3	Landfill Gas Flare Stack Emission Monitoring Results
------------	--

Parameters	Monitoring Results	
NO <sub>2</sub>	<0.02 gs <sup>-1</sup>	
СО	2.81 gs <sup>-1</sup>	
SO <sub>2</sub>	0.11 gs <sup>-1</sup>	
Benzene	9.9 x 10 <sup>-5</sup> gs <sup>-1</sup>	
Vinyl chloride	<1.4 x 10 <sup>-5</sup> gs <sup>-1</sup>	
Exhaust gas velocity	9.1 ms <sup>-1</sup>	

### Table D7.4Landfill Gas Flare Stack Continuous Monitoring Results

Date		Exhaust temperature	Exhaust gas	<b>Operation Statu</b>
	Temperature (°C)	(K)	velocity (ms <sup>-1</sup> ) <sup>(a)</sup>	
Flare 1 – F601	· · /			
01 Dec 21	-	-		Standby
02 Dec 21	935	1115		In Operation
03 Dec 21	-	-		Standby
04 Dec 21	-	-		Standby
05 Dec 21	-	-		Standby
06 Dec 21	-	-		Standby
07 Dec 21	-	-		Standby
08 Dec 21	-	-		Standby
09 Dec 21	-	-		Standby
10 Dec 21	-	-		Standby
11 Dec 21	-	-		Standby
12 Dec 21	-	-		Standby
13 Dec 21	850	1053		In Operation
14 Dec 21	864	1047	9.1	In Operation
15 Dec 21	854	1049	,	In Operation
16 Dec 21	820	1025		In Operation
17 Dec 21	-	-		Standby
18 Dec 21	-	-		Standby
19 Dec 21	-	-		Standby
20 Dec 21	-	_		Standby
20 Dec 21 21 Dec 21	-	_		Standby
21 Dec 21 22 Dec 21	_	_		Standby
22 Dec 21 23 Dec 21	-	-		Standby
23 Dec 21 24 Dec 21	-	-		Standby
24 Dec 21 25 Dec 21	-	-		Standby
25 Dec 21 26 Dec 21	-	-		Standby
20 Dec 21 27 Dec 21	-	-		
27 Dec 21 28 Dec 21	- 859	- 1064		Standby In Operation
		1004		In Operation
29 Dec 21 30 Dec 21	-	-		Standby Standby
	-	-		Standby Standby
31 Dec 21	-	-		Standby
Average		1059	-	
Min		1025	-	
Max Flare 2 – F602		1115	-	
		094		
01 Dec 21	892	984		In Operation
02 Dec 21	893	1097		In Operation
03 Dec 21	890	1053		In Operation
04 Dec 21	869	1065		In Operation
05 Dec 21	878	1085		In Operation
06 Dec 21	-	-		Standby
07 Dec 21	-	-		Standby

ENVIRONMENTAL RESOURCES MANAGEMENT

Date	Gas Combustion	Exhaust temperature	Exhaust gas	<b>Operation Status</b>
	Temperature	(K)	velocity (ms <sup>-1</sup> ) <sup>(a)</sup>	
	(°C)			
08 Dec 21	849	1016		In Operation
09 Dec 21	-	-		Standby
10 Dec 21	-	-		Standby
11 Dec 21	854	1037		In Operation
12 Dec 21	820	1045		In Operation
13 Dec 21	875	1078		In Operation
14 Dec 21	825	1027		In Operation
15 Dec 21	832	1026		In Operation
16 Dec 21	837	1038	9.1	In Operation
17 Dec 21	834	1014		In Operation
18 Dec 21	836	1079		In Operation
19 Dec 21	841	1078		In Operation
20 Dec 21	882	1007		In Operation
21 Dec 21	828	1038		In Operation
22 Dec 21	847	990		In Operation
23 Dec 21	829	976		In Operation
24 Dec 21	-	-		Standby
25 Dec 21	874	959		In Operation
26 Dec 21	857	949		In Operation
27 Dec 21	832	1025		In Operation
28 Dec 21	-	-		Standby
29 Dec 21	894	1040		In Operation
30 Dec 21	823	1021		In Operation
31 Dec 21	832	944		In Operation
Average	853	1027	-	
Min	820	944	-	
Max	894	1097	-	

### Notes:

(a) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring.

### Table D7.5Landfill Gas Generator Stack Emission Monitoring Results

Parameters	Monitoring Results	
NO <sub>2</sub>	0.007 gs <sup>-1</sup>	
СО	0.046 gs <sup>-1</sup>	
SO <sub>2</sub>	0.074 gs <sup>-1</sup>	
Benzene	4 x 10-6 gs-1	
Vinyl chloride	<1.2 x 10 <sup>-6</sup> gs <sup>-1</sup>	
Exhaust gas velocity	17.6 ms <sup>-1</sup>	

### Table D7.6 Landfill Gas Generator Stack Continuous Monitoring Results

Date	Exhaust	Exhaust gas velocity	<b>Operation Status (Landfill Gas</b>		
	temperature (K)	$(ms^{-1})^{(a)}$	Generator in Operation)		
01 Dec 21	837		In Operation (ENGB)		
02 Dec 21	837		In Operation (ENGB)		
03 Dec 21	838		In Operation (ENGB)		
04 Dec 21	843		In Operation (ENGB)		
05 Dec 21	841		In Operation (ENGB)		
06 Dec 21	843		In Operation (ENGB)		
07 Dec 21	843		In Operation (ENGB)		
08 Dec 21	844		In Operation (ENGB)		
09 Dec 21	843		In Operation (ENGB)		
10 Dec 21	847		In Operation (ENGA)		
11 Dec 21	847	17.6	In Operation (ENGB)		
12 Dec 21	843		In Operation (ENGB)		
13 Dec 21	-		Under maintenance		
14 Dec 21	843		In Operation (ENGB)		
15 Dec 21	845		In Operation (ENGB)		
16 Dec 21	846		In Operation (ENGB)		
17 Dec 21	748		In Operation (ENGA)		
18 Dec 21	-		Under maintenance		
19 Dec 21	-		Under maintenance		
20 Dec 21	842		In Operation (ENGB)		
21 Dec 21	844		In Operation (ENGB)		
22 Dec 21	841		In Operation (ENGB)		
23 Dec 21	841		In Operation (ENGB)		
24 Dec 21	841		In Operation (ENGB)		
25 Dec 21	840		In Operation (ENGB)		
26 Dec 21	838		In Operation (ENGB)		
27 Dec 21	838		In Operation (ENGB)		
28 Dec 21	838		In Operation (ENGB)		
29 Dec 21	840		In Operation (ENGB)		
30 Dec 21	841		In Operation (ENGB)		
31 Dec 21	840		In Operation (ENGB)		
Average	838	-			
Min	748	-			
Max	847	-			

#### Notes:

(a) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring.

Annex D8

Investigation Reports of Environmental Quality Limit Exceedance

Project	South East New Territories (SENT) Landfill Extension					
Date	13 December 2021					
Time	9:00 (13 December 2021) – 9:00 (14 December 2021)					
Monitoring Location	AM4					
Parameter	24-hour Total Suspended Particulates (TSP)					
Action / Limit Levels	Action level: >260 $\mu$ g/ m <sup>3</sup>					
	Limit level: >260 $\mu$ g/m <sup>3</sup>					
Measured Level	$282 \mu g /m^3$					
Measured Level Possible reason	From the meteorological data obtained from the SENTX on-site meteorological monitoring station, a predominantly easterly to east-southeasterly wind with highest wind speed 7.8m/s was recorded on 13 and 14 December 2021 during the sampling event. Occasional westerly to west-northwesterly wind was also recorded during the sampling event On 13 December 2021, dust emission from the public fill stockpiling areas and traffic emission from other project site n vicinity and located at the west of dust monitoring location AM4 were observed. The sample taken at AM4 on the day might not represent the operation dust emission from SENTX. In addition, no works which may lead to potential dust emission was conducted in the vicinity of dust monitoring location AM4 on the sampling day based on on-site observations and construction and operation activities as described by the Contractor. Environmental deficiency was not observed during the weekly site inspection on 9 December 2021. The Contractor has implemented the dust control and mitigation measures recommended in the updated EM&A Manual. In accordance with Table 3.8b of the updated EM&A Manual, repeat measurement was conducted on 19 December 2021 to confirm findings. 24-hour TSP level of 129 µg/m <sup>3</sup> (below Action					
	and Limit Levels) was measured during the sampling event, which demonstrate no consecutive dust impact at AM4.					
	Due to presence of the influencing factor other project sites and no potential source from the Project-related activities in the vicinity of AM4 which may lead to the high TSP level was identified, there is no adequate evidence showing that the TSP exceedance at AM4 was deemed to Project-related activities.					
Action Taken / Action to be Taken	Examination of environmental performance of the Project will be continued during the weekly inspections. The Contractor is reminded to implement relevant and appropriate mitigation					

### Investigation Report of Environmental Quality Limit Exceedance

		measures according to the updated EM&A Manual to avoid any exceedance of the Action and Limit Levels. In addition, the Contractor was reminded to discuss the dust control measures with CEDD to minimize the dust impact from
		other project site to the SENTX boundary.
Remarks		-
Prepared by:	Abbey Lau	
Designation:	Environmenta	1 Team
Date:	10 January 202	22

Project	South East New Territories (SENT) Landfill Extension
Date	17 December 2021
Time	11:00 - 11:30
Monitoring Location	Landfill Gas Flare 2 (F602)
Parameter	Carbon Monoxide (CO)
Limit Levels	>2.43 g/s
Measured Level	2.81 g/s
Possible reason	As confirmed by the Contractor, Landfill Gas Flare 2 (F602) was under normal operating conditions during the sampling event. The landfill gas flare emission monitoring results (NO <sub>2</sub> , SO <sub>2</sub> , Benzene, Vinyl chloride, gas combustion temperature, exhaust temperature and exhaust gas velocity) at Landfill Gas Flare 2 (F602) on 17 December 2021 were well within the respective limit levels. It is possible that the slight exceedance of CO limit level measured on 17 December 2021 could be due to some short-term system instability (e.g. insufficient air, short gas residence time or ineffective mixing of landfill gas and air during the combustion) during the sampling event. Hence, the CO exceedance at Landfill Gas Flare 2 (F602) on 17 December 2021 is considered to be Project related.
	In accordance with Table 3.8b of the updated EM&A Manual, repeat measurement was conducted on 12 January 2022 (it should be noted that the turnaround time of the laboratory analysis of the flue gas sample is 3 weeks and the results were available on 11 February 2022) to confirm findings. The CO concentration (0.032 g/s) measured on 12 January 2022 is well below Limit Level. There is no consecutive exceedance of CO concentrations in the flue gas emission of Landfill Gas Flare 2 (F602).
	It should also be noted that although the measured CO level exceeded the limit level of the EM&A programme (which was set based on the stack design parameters), the slight exceedance of CO on 17 December 2021 will not cause adverse air quality impact to the identified ASRs as the anticipated CO concentrations at the identified ASRs will still be well below the respective AQO criteria with reference to the findings of the operational air quality impact assessment of the SENTX Environmental Review Report.
Action Taken / Action to be Taken	Examination of environmental performance of the Project will be continued during the weekly inspections. The Contractor is reminded to closely monitoring the operating conditions of the flare to avoid any exceedance of the Action and Limit Levels.

### Investigation Report of Environmental Quality Limit Exceedance

Remarks	-	
Prepared by:	Abbey Lau	
Designation:	Environmental Tean	m
Date:	22 February 2022	

Annex E

### Noise

Annex E1

Calibration Certificates for Noise Monitoring Equipment



Sun Creation Engineering Limited

**Calibration & Testing Laboratory** 

## Certificate of Calibration 校正證書

Certificate No. : C214414 證書編號

ITEM TESTED / 送檢項目		(Job No. / 序引編號:IC21-1345)	Date of Receipt / 收件日期: 8 July 2021		
Description / 儀器名稱	:	Integrating Sound Level Meter (EQ009)			
Manufacturer / 製造商	:	Brüel & Kjær			
Model No. / 型號	:	2238			
Serial No. / 編號	:	2285722			
Supplied By / 委託者	:	Action-United Environmental Services and Consulting			
		Unit A, 20/F., Gold King Industrial Building,			
		35-41 Tai Lin Pai Road, Kwai Chung, N.T.			
TEST CONDITIONS / 測試條件					

Temperature / 溫度 : (23 ± 2)°C Line Voltage / 電壓 : ---

Relative Humidity / 相對濕度 : (50±25)%

#### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 26 July 2021

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only. The results do not exceed manufacturer's specification. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試	: <u>Chenk</u> K P Cheuk Project Engineer		
Certified By 核證	: K O Lee Engineer	Date of Issue : 簽發日期	27 July 2021

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



### Sun Creation Engineering Limited

Calibration & Testing Laboratory

### Certificate of Calibration 校正證書

Certificate No. : C214414 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- 2. Self-calibration using laboratory acoustic calibrator was performed before the test from 6.1.1.2 to 6.4.
- 3. The results presented are the mean of 3 measurements at each calibration point.
- 4. Test equipment :

Equipment ID	Description	Certificate No.
CL280	40 MHz Arbitrary Waveform Generator	C210084
CL281	Multifunction Acoustic Calibrator	AV210017

- 5. Test procedure : MA101N.
- 6. Results :
- 6.1 Sound Pressure Level
- 6.1.1 Reference Sound Pressure Level

#### 6.1.1.1 Before Self-calibration

	UUT	Setting	Applied	Value	UUT	
Range	Parameter	Frequency	Time	Level	Freq.	Reading
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)
52 - 132	L <sub>AFP</sub>	A	F	94.00	1	94.1

#### 6.1.1.2 After Self-calibration

	UUT Setting				d Value	UUT	IEC 60651
Range	Parameter	Frequency	Time	Level	Freq.	Reading	Type 1 Spec.
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)
52 - 132	L <sub>AFP</sub>	Α	F	94.00	1	94.0	$\pm 0.7$

#### 6.1.2 Linearity

UUT Setting				Applie	d Value	UUT
Range	Parameter	Frequency Time		Level	Freq.	Reading
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)
52 - 132	L <sub>AFP</sub>	А	F	94.00	1	94.0 (Ref.)
				104.00		104.0
				114.00		113.9

IEC 60651 Type 1 Spec. :  $\pm$  0.4 dB per 10 dB step and  $\pm$  0.7 dB for overall different.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



4

輝創工程有限公司

Sun Creation Engineering Limited

Calibration & Testing Laboratory

## Certificate of Calibration 校正證書

Certificate No. : C214414 證書編號

#### 6.2 Time Weighting

#### 6.2.1 Continuous Signal

	UUT	Setting		Applied Value		UUT	IEC 60651
Range	Range Parameter Frequency Time				Freq.	Reading	Type 1 Spec.
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)
52 - 132	L <sub>AFP</sub>	А	F	94.00	1	94.0	Ref.
	L <sub>ASP</sub>		S			94.0	$\pm 0.1$
	L <sub>AIP</sub>		I			94.1	$\pm 0.1$

#### 6.2.2 Tone Burst Signal (2 kHz)

Tone Durse												
	UUT	Setting		Applied Value		UUT	IEC 60651					
Range	Parameter	Frequency	Time	Level Burst		Reading	Type 1 Spec.					
(dB)		Weighting	Weighting	(dB)	Duration	(dB)	(dB)					
32 - 112	L <sub>AFP</sub>	A	F	106.0	Continuous	106.0	Ref.					
	L <sub>AFMax</sub>				200 ms	105.0	$-1.0 \pm 1.0$					
	L <sub>ASP</sub>		S		Continuous	106.0	Ref.					
	L <sub>ASMax</sub>				500 ms	102.0	$-4.1 \pm 1.0$					

#### 6.3 Frequency Weighting

#### 6.3.1 A-Weighting

		Setting		Applied Value		UUT	IEC 60651
Range	Parameter	Frequency	Time	Level	Level Freq.		Type 1 Spec.
(dB)		Weighting	Weighting	(dB)		(dB)	(dB)
52 - 132	L <sub>AFP</sub>	А	F	94.00	31.5 Hz	54.5	$-39.4 \pm 1.5$
					63 Hz	67.8	$-26.2 \pm 1.5$
					125 Hz	77.8	$-16.1 \pm 1.0$
					250 Hz	85.3	$-8.6 \pm 1.0$
					500 Hz	90.7	$-3.2 \pm 1.0$
					1 kHz	94.0	Ref.
					2 kHz	95.2	$+1.2 \pm 1.0$
					4 kHz	94.9	$+1.0 \pm 1.0$
		ž			8 kHz	92.8	-1.1 (+1.5 ; -3.0)
					12.5 kHz	89.7	-4.3 (+3.0 ; -6.0)

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



Sun Creation Engineering Limited

**Calibration & Testing Laboratory** 

## Certificate of Calibration 校正證書

Certificate No. : C214414 證書編號

#### 6.3.2 C-Weighting

C-weighting										
	UUT	Setting		Appl	ied Value	UUT	IEC 60651			
Range	Parameter	Frequency	Time	Level	Freq.	Reading	Type 1 Spec.			
(dB)		Weighting	Weighting	(dB)	~	(dB)	(dB)			
52 - 132	L <sub>CFP</sub>	С	F	94.00	31.5 Hz	90.9	$-3.0 \pm 1.5$			
					63 Hz	93.1	$-0.8 \pm 1.5$			
					125 Hz	93.8	$-0.2 \pm 1.0$			
					250 Hz	94.0	$0.0 \pm 1.0$			
					500 Hz	94.0	$0.0 \pm 1.0$			
					1 kHz	94.0	Ref.			
					2 kHz	93.8	$-0.2 \pm 1.0$			
					4 kHz	93.1	$-0.8 \pm 1.0$			
					8 kHz	90.9	-3.0 (+1.5 ; -3.0)			
					12.5 kHz	87.7	-6.2 (+3.0 ; -6.0)			

#### 6.4

Time Averaging

	UUT Setting			Applied Value					UUT	IEC 60804
Range	Parameter	Frequency	Integrating	Frequency	Burst	Burst	Burst	Equivalent	Reading	Type 1
(dB)		Weighting	Time	(kHz)	Duration	Duty	Level	Level	(dB)	Spec.
					(ms)	Factor	(dB)	(dB)		(dB)
32 - 112	L <sub>Aeq</sub>	А	10 sec.	4	1	1/10	110.0	100	99.9	± 0.5
						1/10 <sup>2</sup>		90	90.0	± 0.5
			60 sec.	1		1/10 <sup>3</sup>		80	79.1	± 1.0
			5 min.			1/104		70	69.1	± 1.0

Remarks : - UUT Microphone Model No. : 4188 & S/N : 2812706

- Mfr's Spec. : IEC 60651 Type 1 & IEC 60804 Type 1

- Uncertainties of Applied Value :	94 dB : 31.5 Hz - 125 Hz 250 Hz - 500 Hz 1 kHz 2 kHz - 4 kHz 8 kHz 12.5 kHz 104 dB : 1 kHz 114 dB : 1 kHz Burst equivalent level	
------------------------------------	--	--

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



Sun Creation Engineering Limited

**Calibration & Testing Laboratory** 

# Certificate of Calibration 校正證書

Certificate No. : C215420 證書編號

ITEM TESTED / 送檢項	目	(Job No. / 序引編號:IC21-1765)	Date of Receipt / 收件日期: 26 August 2021				
Description / 儀器名稱	:	Sound Level Meter (EQ013)					
Manufacturer / 製造商	:	Rion					
Model No. / 型號	:	NL-52	5				
Serial No. / 編號	:	00921191					
Supplied By / 委託者	:	Action-United Environmental Services and Consulting					
		Unit A, 20/F., Gold King Industrial Building,					
		35-41 Tai Lin Pai Road, Kwai Chung, N.	Г.				
TEST CONDITIONS / 3	tille:	体件					

Temperature / 溫度 :  $(23 \pm 2)^{\circ}$ C Line Voltage / 電壓 : ---

Relative Humidity / 相對濕度 : (50 ± 25)%

#### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 10 September 2021

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only. The results do not exceed manufacturer's specification. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Fluke Everett Service Center, USA

Tested By 測試	: <u>Chenk</u> K P Cheuk Project Engineer			
Certified By 核證	K C/Lee Engineer	Date of Issue 簽發日期	:	13 September 2021

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



Calibration & Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C215420 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- 2. Self-calibration was performed before the test.
- 3. The results presented are the mean of 3 measurements at each calibration point.
- 4. Test equipment :

Equipment IDDescriptionCL28040 MHz Arbitrary Waveform GeneratorCL281Multifunction Acoustic Calibrator	<u>Certificate No.</u> C210084 AV210017
---	---

- 5. Test procedure : MA101N.
- 6. Results :
- 6.1 Sound Pressure Level
- 6.1.1 Reference Sound Pressure Level

	UUT	Setting		Applied	d Value	UUT	IEC 61672
Range	Function	Frequency	Time	Level	Freq.	Reading	Class 1 Spec.
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)
30 - 130	L <sub>A</sub>	A	Fast	94.00	1	94.2	± 1.1

#### 6.1.2 Linearity

	UU	Г Setting	Applie	d Value	UUT	
Range	Function	Frequency Time		Level	Freq.	Reading
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)
30 - 130	L <sub>A</sub>	L <sub>A</sub> A		94.00 1		94.2 (Ref.)
				104.00		104.2
				114.00		114.1

IEC 61672 Class 1 Spec. :  $\pm$  0.6 dB per 10 dB step and  $\pm$  1.1 dB for overall different.

#### 6.2 Time Weighting

	UUT	Setting		Applied Value		UUT	IEC 61672
Range Function Frequency Time				Level	Freq.	Reading	Class 1 Spec.
(dB)		Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)
30 - 130	L <sub>A</sub>	А	Fast	94.00	1	94.2	Ref.
			Slow			94.2	± 0.3

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



# Certificate of Calibration 校正證書

Certificate No. : C215420 證書編號

#### 6.3 Frequency Weighting

#### A-Weighting 6.3.1

	UUT Setting					UUT	LEC 61672
Range	Function	Frequency	Time	Level	Freq.	Reading	Class 1 Spec.
(dB)		Weighting	Weighting	(dB)		(dB)	(dB)
30 - 130	$L_A$	А	Fast	94.00	63 Hz	67.9	$-26.2 \pm 1.5$
					125 Hz	78.0	$-16.1 \pm 1.5$
					250 Hz	85.5	$-8.6 \pm 1.4$
					500 Hz	91.0	$-3.2 \pm 1.4$
					1 kHz	94.2	Ref.
					2 kHz	95.4	$+1.2 \pm 1.6$
					4 kHz	95.2	$+1.0 \pm 1.6$
					8 kHz	93.2	-1.1 (+2.1 ; -3.1)
					16 kHz	86.2	-6.6 (+3.5 ; -17.0)

#### 6.3.2 C-Weighting

	UUT Setting				ed Value	UUT	IEC 61672
Range	Function	Frequency	Time	Level	Freq.	Reading	Class 1 Spec.
(dB)		Weighting	Weighting	(dB)		(dB)	(dB)
30 - 130	L <sub>C</sub>	С	Fast	94.00	63 Hz	93.3	$-0.8 \pm 1.5$
					125 Hz	94.0	$-0.2 \pm 1.5$
					250 Hz	94.2	$0.0 \pm 1.4$
					500 Hz	94.2	$0.0 \pm 1.4$
					1 kHz	94.2	Ref.
					2 kHz	94.0	$-0.2 \pm 1.6$
					4 kHz	93.4	$-0.8 \pm 1.6$
					8 kHz	91.3	-3.0 (+2.1 ; -3.1)
					16 kHz	84.3	-8.5 (+3.5 ; -17.0)

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory. 本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



# Certificate of Calibration 校正證書

Certificate No.: C215420 證書編號

Remarks : - UUT Microphone Model No. : UC-59 & S/N : 12910

- Mfr's Spec. : IEC 61672 Class 1

- Uncertainties of Applied Value :	94 dB : 63 Hz - 125 Hz 250 Hz - 500 Hz 1 kHz 2 kHz - 4 kHz 8 kHz 16 kHz	: $\pm 0.35 \text{ dB}$ : $\pm 0.30 \text{ dB}$ : $\pm 0.20 \text{ dB}$ : $\pm 0.35 \text{ dB}$ : $\pm 0.45 \text{ dB}$ : $\pm 0.70 \text{ dB}$
	16 kHz 104 dB : 1 kHz	: ± 0.70 dB : ± 0.10 dB (Ref. 94 dB)
	114 dB : 1 kHz	: $\pm$ 0.10 dB (Ref. 94 dB)

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



Sun Creation Engineering Limited

**Calibration & Testing Laboratory** 

## Certificate of Calibration 校正證書

Certificate No. : C215418 證書編號

(đ.,		
ITEM TESTED / 送檢項目 Description / 儀器名稱 : Manufacturer / 製造商 : Model No. / 型號 : Serial No. / 編號 : Supplied By / 委託者 :	<ul> <li>(Job No. / 序引編號: IC21-1345)</li> <li>Sound Calibrator (EQ083)</li> <li>Rion</li> <li>NC-74</li> <li>34246492</li> <li>Action-United Environmental Services</li> <li>Unit A, 20/F., Gold King Industrial Bui</li> <li>35-41 Tai Lin Pai Road, Kwai Chung, N</li> </ul>	lding,
TEST CONDITIONS / 測詞	式條件	
Temperature / 溫度 : (2 Line Voltage / 電壓 :	3 ± 2)°C	Relative Humidity / 相對濕度 : (50 ± 25)%
TEST SPECIFICATIONS Calibration check	/ 測試規範	
DATE OF TEST / 測試日算	期 : 10 September 2021	
TEST RESULTS / 測試結 The results apply to the parti The results do not exceed ma The results are detailed in th	cular unit-under-test only. anufacturer's specification.	
Tested By : 測試	K P Cheuk Project Engineer	
	eta	

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory. 本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Date of Issue

簽發日期

:

:

Certified By

核證

K C Lee Engineer 13 September 2021



#### Sun Creation Engineering Limited

Calibration & Testing Laboratory

### Certificate of Calibration 校正證書

Certificate No. : C215418 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- 2. The results presented are the mean of 3 measurements at each calibration point.
- 3. Test equipment :

<u>Equipment ID</u> CL130	<u>Description</u> Universal Counter	<u>Certificate No.</u> C213954
CL281	Multifunction Acoustic Calibrator	AV210017
TST150A	Measuring Amplifier	C201309

#### 4. Test procedure : MA100N.

- 5. Results :
- 5.1 Sound Level Accuracy

UUT	Measured Value	Mfr's Spec.	Uncertainty of Measured Value
Nominal Value	(dB)	(dB)	(dB)
94 dB, 1 kHz	94.0	$\pm 0.3$	$\pm 0.2$

#### 5.2 Frequency Accuracy

UUT Nominal Value	Measured Value	Mfr's	Uncertainty of Measured Value
(kHz)	(kHz)	Spec.	(Hz)
1	1.002	$1 \text{ kHz} \pm 1 \%$	± 1

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



Sun Creation Engineering Limited

Calibration & Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C212414 證書編號

ITEM TESTED / 送檢功	百百	(Job No. / 序引編號:IC21-0728)	Date of Receipt / 收件日期: 13 April 2021
Description / 儀器名稱	:	Sound Level Calibrator (EQ085)	
Manufacturer / 製造商	:	Rion	
Model No. / 型號	:	NC-73	
Serial No. / 編號	:	10655561	
Supplied By / 委託者	:	Action-United Environmental Services and G	Consulting
		Unit A, 20/F., Gold King Industrial Building	, ,
		35-41 Tai Lin Pai Road, Kwai Chung, N.T.	

#### TEST CONDITIONS / 測試條件

Temperature / 溫度 : (23 ± 2)°C Line Voltage / 電壓 : --- Relative Humidity / 相對濕度 : (50±25)%

#### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 25 April 2021

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification & user's specified acceptance criteria. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies

:

- Fluke Everett Service Center, USA

Tested By 測試

سا	h
 m	\(.
ΗT	Wong

K C Lee Engineer

1

Assistant Engineer

Certified By 核證 Date of Issue 簽發日期 :

26 April 2021

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.



Sun Creation Engineering Limited

Calibration & Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C212414 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- 2. The results presented are the mean of 3 measurements at each calibration point.
- 3. Test equipment :

<u>Equipment ID</u>	<u>Description</u>	<u>Certificate No.</u>
CL130	Universal Counter	C203952
CL281	Multifunction Acoustic Calibrator	AV210017
TST150A	Measuring Amplifier	C201309

- 4. Test procedure : MA100N.
- 5. Results :
- 5.1 Sound Level Accuracy

UUT	Measured Value	Mfr's Spec.	Uncertainty of Measured Value
Nominal Value	(dB)	(dB)	(dB)
94 dB, 1 kHz	94.0	$\pm 0.5$	± 0.2

#### 5.2 Frequency Accuracy

UUT Nominal Value	Measured Value	User's	Uncertainty of Measured Value
(kHz)	(kHz)	Spec.	(Hz)
1	0.955	$1 \text{ kHz} \pm 6 \%$	± 1

Remarks : - The user's specified acceptance criteria (user's spec.) is a customer pre-defined operating tolerance of the UUT, suitable for one's own intended use.

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration is traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.


Annex E2

Noise Monitoring Results

Date	Start Time	Finish Time	Weather	L <sub>10 (30min)</sub>	L90 (30min)	Leq (30min)
2 Dec 21	15:49	16:19	Sunny	50.5	48.0	49.7
9 Dec 21	15:21	15:51	Sunny	48.0	44.0	47.0
14 Dec 21	11:04	11:34	Sunny	52.2	49.8	51.0
22 Dec 21	15:36	16:06	Sunny	52.0	47.5	50.9
28 Dec 21	13:39	14:09	Sunny	52.5	49.0	51.1
			-		Average	e 49.9
					Mir	<b>h</b> 47.0
					Max	<b>x</b> 51.1

Table E2.1Measured Noise Levels (dB(A)) at NM1 during Normal Working Hours (0700-<br/>1900 hours; Normal Weekdays)

Figure E2.1 Graphical Presentation for Noise Monitoring at NM1

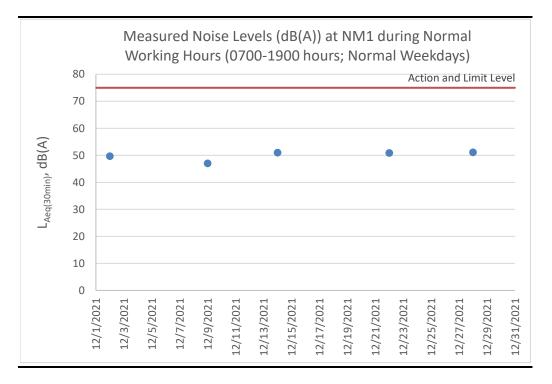

Annex E3

# Event and Action Plan for Noise Monitoring

Event	Action						
	ET	IEC	Contractor				
	<ul> <li>Identify the source(s) and investigate the cause(s) of exceedance and complaint</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> </ul>				
	<ul> <li>Identify the source(s) and investigate the cause(s) of exceedance and complaint</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project</li> <li>Analyse the operation of SENTX and investigate the causes of exceedance</li> <li>Provide interim report to Contractor, IEC, Project Proponent and EPD the causes of the exceedances</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Take immediate measures to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC within 3 working days of notification</li> <li>Implement the agreed proposals</li> <li>Resubmit proposals if problem still not under control</li> <li>Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated</li> </ul>				

### Annex E3 Event and Action Plan for Operational Noise Monitoring

Annex F

# Surface Water Quality

Annex F1

Calibration Certificates for Surface Water Quality Monitoring Equipment



ALS Technichem (HK) Pty Ltd 11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong T: +852 2610 1044 | F: +852 2610 2021

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: CLIENT:	MR BEN TAM ACTION-UNITED ENVIRONMENTAL SERVICES &	WORK ORDER:	HK2143652
	CONSULTING	SUB-BATCH:	0
ADDRESS:	RM A 20/F., GOLD KING IND BLDG,	LABORATORY:	HONG KONG
	NO. 35-41 TAI LIN PAI ROAD, KWAI CHUNG, N.T.	DATE RECEIVED:	27-Oct-2021
		DATE OF ISSUE:	02-Nov-2021

### SPECIFIC COMMENTS

Equipment information (Brand name, Model No., Serial No. and Equipment No.) is provided by client. The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the laboratory or quoted from relevant international standards.

The validity of equipment/ meter performance only applies to the result(s) stated in the report.

Equipment Type:	Multifunctional Meter
Service Nature:	Performance Check
Scope:	Conductivity, Dissolved Oxygen, pH Value, Turbidity, Salinity and Temperature
Brand Name/ Model No.:	[YSI]/ [Professional DSS]
Serial No./ Equipment No.:	[17B102764/17B100758]/ [EQW019]
Date of Calibration:	02-November-2021

### **GENERAL COMMENTS**

This is the Final Report and supersedes any preliminary report with this batch number.

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

WORK ORDER:	HK2143652		ALS
SUB-BATCH: DATE OF ISSUE: CLIENT:	0 02-Nov-2021 ACTION-UNITED ENVIRONMEN	TAL SERVICES & CONSULTING	
Equipment Type:	Multifunctional Meter		
Brand Name/ Model No.:	[YSI]/ [Professional DSS]		
Serial No./ Equipment No.:	[17B102764/17B100758]/[EC	QW019]	
Date of Calibration:	02-November-2021	Date of Next Calibration:	02-February-2022

PARAMETERS:

Conductivity

Method Ref: APHA (21st edition), 2510B

Expected Reading (µS/cm)	Displayed Reading (µS/cm)	Tolerance (%)			
146.9	148.1	+0.8			
6667	6711	+0.7			
12890	12642	-1.9			
58670	53798	-8.3			
	Tolerance Limit (%)	±10.0			

Dissolved Oxygen

### n Method Ref: APHA (21st edition), 45000: G

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
3.44	3.30	-0.14
5.01	5.10	+0.09
8.23	8.25	+0.02
	Tolerance Limit (mg/L)	±0.20

pH Value

### Method Ref: APHA (21st edition), 4500H: B

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)		
4.0	4.07	+0.07		
7.0	7.12	+0.12		
10.0	9.91	-0.09		
	Tolerance Limit (pH unit)	±0.20		

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

WORK ORDER:	HK2143652		ALS
SUB-BATCH: DATE OF ISSUE: CLIENT:	0 02-Nov-2021 ACTION-UNITED ENVIRONMEN	TAL SERVICES & CONSULTING	
Equipment Type: Brand Name/ Model No.:	Multifunctional Meter [YSI]/ [Professional DSS]		
Serial No./ Equipment No.:	[17B102764/17B100758]/ [EC	QW019]	
Date of Calibration:	02-November-2021	Date of Next Calibration:	02-February-2022

PARAMETERS:

Turbidity

Method Ref: APHA (21st edition), 2130B

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
0	0.07	
4	4.08	+2.0
40	41.36	+3.4
80	75.86	-5.2
400	406.97	+1.7
800	810.23	+1.3
	Tolerance Limit (%)	±10.0

Salinity

### Method Ref: APHA (21st edition), 2520B

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)
0	0.01	
10	9.96	-0.4
20	19.84	-0.8
30	29.56	-1.5
	Tolerance Limit (%)	±10.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

5

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

WORK ORDER:	HK2143652		ALS
SUB-BATCH: DATE OF ISSUE: CLIENT:	0 02-Nov-2021 ACTION-UNITED ENVIRONMENT	AL SERVICES & CONSULTING	
Equipment Type: Brand Name/ Model No.: Serial No./ Equipment No.: Date of Calibration:	Multifunctional Meter [YSI]/ [Professional DSS] [17B102764/17B100758]/ [EQV 02-November-2021	V019] Date of Next Calibration:	02-February-2022
PARAMETERS:			
Temperature		ional Accreditation New Zealand T h 2008: Working Thermometer Cal	
	Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)
	10.5	10.8	+0.3

10.5	10.8	+0.3
21.5	21.3	-0.2
39.5	39.0	-0.5
	Tolerance Limit (°C)	±2.0
	·	

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

# Surface Water Quality Monitoring Results

 Table F2.1 Surface Water Quality Monitoring Results at DP4T

Date	Time	Weather Condition	Water Appearance	Water Condition	Water Temperature (oC)	Ammoniacal- nitrogen (mg/L)	COD	Suspended Solids (SS) (mg/L)	Remarks
28 Dec 21	10:46	Sunny	Unable to coll	Unable to collect water sample due to insufficient flow					
					Average	-	-	-	-
					Min	-	-	-	-
					Max	-	-	-	-

### Table F2.2Surface Water Quality Monitoring Results at DP6

Date	Time	Weather Condition	Water Appearance	Water Condition	Water Temperature (oC)	Ammoniacal- nitrogen (mg/L)	COD	Suspended Solids (SS) (mg/L)	Remarks
28 Dec 21	10:42	Sunny		Unable to	collect water sam	ple due to insuffic	cient flow		-
					Average	2 -	-	-	-
					Min	l -	-	-	-
					Max	< -	-	-	-

Event and Action Plan for Surface Water Quality Monitoring

Event	Action						
	ET	IEC	Contractor				
xceedance of .imit Level for urface water nonitoring	<ul> <li>Identify source(s) of impact and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to weekly if exceedance is due to the Project until no exceedance of Limit Level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>				
xceedance of imit Level for roundwater nonitoring	<ul> <li>Identify source(s) of impact and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to weekly if exceedance is due to the Project until no exceedance of Limit Level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Divert groundwater collected at the collection sumps to the leachate treatment plant</li> <li>Submit proposals for remedial measures to IEC</li> <li>Rectify any unacceptable practice or design</li> <li>Amend working methods as required</li> <li>Implement amended working methods, if necessary</li> </ul>				

### Annex F3 Event and Action Plan for Water Quality Monitoring During Operation/Restoration Phase

Event	Action						
	ET	IEC	Contractor				
Exceedance of Limit Level for leachate level	<ul> <li>Investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operating activities and performance of the leachate collection system</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Check the performance of the leachate collection system</li> <li>Rectify any unacceptable practice;</li> <li>Amend leachate collection design if required</li> <li>Implement amended leachate collection system, if necessary</li> </ul>				
Exceedance of Limit Level of effluent discharge from LTP	<ul> <li>Investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to weekly until no exceedance of Limit Level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operation performance of the LTP</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Rectify any unacceptable practice;</li> <li>Carry out remedial measures or amend design as required</li> <li>Implement amended design, if necessary</li> </ul>				

Calibration Certificates for Effluent Quality Monitoring Equipment



ALS Technichem (HK) Pty Ltd 11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong T: +852 2610 1044 | F: +852 2610 2021

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: CLIENT:	MR IVAN LEUNG ALS TECHNICHEM (HK) PTY LTD	WORK ORDER:	HK2142558
ADDRESS:	11/F., CHUNG SHUN KNITTING CENTRE,	SUB-BATCH:	0
	1-3 WING YIP STREET, KWAI CHUNG, N.T.	LABORATORY:	HONG KONG
		DATE RECEIVED:	20-Oct-2021
		DATE OF ISSUE:	27-Oct-2021

### SPECIFIC COMMENTS

Equipment information (Brand name, Model No., Serial No. and Equipment No.) is provided by client. The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the laboratory or quoted from relevant international standards.

The validity of equipment/ meter performance only applies to the result(s) stated in the report.

Equipment Type:Multifunctional MeterService Nature:Performance CheckScope:Conductivity, Dissolved Oxygen, pH Value, Redox Potential and TemperatureBrand Name/ Model No.:[LUTRON]/ [WA-2017SD]Serial No./ Equipment No.:[T.016811]/ [HK2009]Date of Calibration:26-October-2021

### **GENERAL COMMENTS**

This is the Final Report and supersedes any preliminary report with this batch number.

ha Alij

Mr Chan Siu Ming, Vico Manager - Inorganic

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

WORK ORDER:	HK2142558			ALS
SUB-BATCH: DATE OF ISSUE: CLIENT:	0 27-Oct-2021 ALS TECHNICHEM (HK) PTY LT	D		
Equipment Type: Brand Name/ Model No.:	Multifunctional Meter [LUTRON]/ [WA-2017SD]			
Serial No./ Equipment No.: Date of Calibration:	[T.016811]/ [HK2009] 26-October-2021	Date of Next Calibration:	26-January-2022	
		Dute of Next Calibration.	20 January 2022	

PARAMETERS:

Conductivity Method Ref: APHA (21st edition), 2510B

Expected Reading (µS/cm)	Displayed Reading (µS/cm)	Tolerance (%)		
146.9	142.6	-2.9		
6667	6430	-3.6		
12890	12940	+0.4		
58670	57000	-2.8		
	Tolerance Limit (%)	±10.0		

Dissolved Oxygen

### en Method Ref: APHA (21st edition), 45000: G

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)		
3.83	4.0	+0.17		
5.24	5.1	-0.14		
7.88	8.0	+0.12		
	Tolerance Limit (mg/L)	±0.20		

pH Value

### Method Ref: APHA (21st edition), 4500H: B

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)		
4.0	4.08	+0.08		
7.0	6.98	-0.02		
10.0	9.94	-0.06		
	Tolerance Limit (pH unit)	±0.20		

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ma Siz

Mr Chan Siu Ming, Vico Manager - Inorganic

WORK ORDER:	HK2142558		ALS				
SUB-BATCH: DATE OF ISSUE: CLIENT:	0 27-Oct-2021 ALS TECHNICHEM (HK) PTY LTD						
Equipment Type: Brand Name/ Model No.:	Multifunctional Meter [LUTRON]/ [WA-2017SD]						
Serial No./ Equipment No.:	[T.016811]/ [HK2009]						
Date of Calibration:	26-October-2021	Date of Next Calibration:	26-January-2022				
PARAMETERS:							
Redox Potential	Method Ref: APHA (21st edition),	2580B					
	/ Manual						
	the Environmental of Water, Wastewater and Soil (2nd edition), Rump & Krist (1992)						
	Expected Reading (mV)	Displayed Reading (mV)	Difference of A and B (mV)				
	Solution A (~234mV)	232					

_	-				
T	em	npe	rat	ur	e

Method Ref: Section 6 of International Accreditation New Zealand Technical

Solution B (~300mV)

Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)
11.0	10.8	-0.2
22.0	21.3	-0.7
40.5	39.2	-1.3
	Tolerance Limit (°C)	±2.0

303

Tolerance Limit (mV)

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ma Ain

+71.0

>66

Mr Chan Siu Ming, Vico Manager - Inorganic

# Leachate Levels Monitoring Results

Date		Meter No.X1 (cm)	Meter No.X2 (cm)	Average (cm)
Pump Static	on No. 1X	(Cell 1X)		
01 Dec 21		53	73	63.0
02 Dec 21		53	73	63.0
03 Dec 21		53	73	63.0
04 Dec 21		55	75	65.0
05 Dec 21		57	75	66.0
06 Dec 21		57	75	66.0
07 Dec 21		57	77	67.0
08 Dec 21		57	75	66.0
09 Dec 21		86	10	48.0
10 Dec 21		84	102	93.0
11 Dec 21		84	104	94.0
12 Dec 21		90	111	100.5
13 Dec 21		111	90	100.5
14 Dec 21		62	82	72.0
15 Dec 21		68	82	75.0
16 Dec 21		64	84	74.0
17 Dec 21		64	84	74.0
18 Dec 21		66	86	76.0
19 Dec 21		88	68	78.0
20 Dec 21		88	68	78.0
21 Dec 21		70	91	80.5
22 Dec 21		44	64	54.0
23 Dec 21		46	66	56.0
24 Dec 21		46	66	56.0
25 Dec 21		53	73	63.0
26 Dec 21		53	73	63.0
27 Dec 21		53	73	63.0
28 Dec 21		55	75	65.0
29 Dec 21		57	77	67.0
30 Dec 21		59	79	69.0
31 Dec 21		82	100	91.0
	Average	65	78	71
	Min	44	10	48
	Max	111	111	101

### Table F5.1Leachate Levels Monitoring Results (Pump Station No.1X (Cell 1X))

### Table F5.2Leachate Levels Monitoring Results (Pump Station No.2X (Cell 2X))

Date	Meter No.X1 (cm)	Meter No.X2 (cm)	Average (cm)
Pump Station No	o. 2X (Cell 2X)		
10 Dec 21	84	82	83.0
11 Dec 21	88	86	87.0
12 Dec 21	88	86	87.0
13 Dec 21	88	86	87.0
14 Dec 21	88	86	87.0
15 Dec 21	88	86	87.0
16 Dec 21	88	86	87.0
17 Dec 21	88	86	87.0
18 Dec 21	88	86	87.0
19 Dec 21	70	73	71.5
20 Dec 21	70	73	71.5
21 Dec 21	84	88	86.0
22 Dec 21	79	82	80.5
23 Dec 21	82	84	83.0
24 Dec 21	73	75	74.0

ENVIRONMENTAL RESOURCES MANAGEMENT

GREEN VALLEY LANDFILL LTD.

Date	Meter No.X1	(cm) Meter No.X2 (cr	m) Average (cm)
25 Dec 21	70	73	71.5
26 Dec 21	70	73	71.5
27 Dec 21	70	73	71.5
28 Dec 21	75	77	76.0
29 Dec 21	77	82	79.5
30 Dec 21	82	84	83.0
31 Dec 21	84	88	86.0
	Average 81	82	81
	<b>Min</b> 70	73	72
	<b>Max</b> 88	88	87

Table F5.3Leachate Levels Monitoring Results (Pump Station No.3X (Cell 3X))

Date	Meter No.X1 (cm)	Meter No.X2 (cm)	Average (cm)
Pump Station No	o. 3X (Cell 3X)		
23 Dec 21	90	90	90.0
24 Dec 21	97	97	97.0
25 Dec 21	84	84	84.0
26 Dec 21	84	84	84.0
27 Dec 21	84	84	84.0
28 Dec 21	95	95	95.0
29 Dec 21	99	99	99.0
30 Dec 21	79	79	79.0
31 Dec 21	86	86	86.0
Ave	erage 89	89	89
	<b>Min</b> 79	79	79
	<b>Max</b> 99	99	99

# Effluent Quality Monitoring Results

### Table F6.1Effluent Monitoring Results

		1 Dec 21	2 Dec 21	3 Dec 21	4 Dec 21	5 Dec 21	6 Dec 21	7 Dec 21	8 Dec 21	9 Dec 21	10 Dec 21	11 Dec 21
<b>On-site Measurements</b>	3											
Temperature	°C	26.3	25.7	25.8	25.4	24.8	25.3	25.4	26.1	24.8	28.1	28.8
pH Value	pH Unit	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4
Volume Discharged	m <sup>3</sup>	1264	1193	1225	667	791	663	1149	1249	1401	1293	1139
Laboratory Analysis		•										
Suspended Solids (SS)	mg/L	32.4	23	21.6	22.8	13.3	23.1	27.5	21.3	22.1	14.2	28
Alkalinity	mg/L	2200	2180	2120	2130	2130	2160	2160	2200	2190	2130	2110
Ammoniacal-nitrogen	mg/L	0.39	0.38	0.38	0.26	0.32	< 0.10	< 0.10	0.27	0.42	0.37	0.3
Chloride	mg/L	2200	1770	1780	1640	1710	1710	1680	1660	1760	1750	1770
Nitrite-nitrogen	mg/L	0.28	0.33	0.29	< 0.10	0.36	0.3	0.19	0.18	0.21	0.23	0.16
Phosphate	mg/L	10.2	9.28	10.2	10.5	9.27	10.1	10.3	9.7	9.58	9.98	9.89
Sulphate	mg/L	66	60	61	65	59	61	64	66	62	63	62
Total Nitrogen	mg/L	104	115	125	130	127	112	90.4	93.4	110	113	118
Nitrate-nitrogen	mg/L	53.5	58	73	80.3	79.6	64.1	43	44.3	54.6	61	65.8
Biochemical Oxygen		10	11	11	24	9	9	12	11	7	7	9
Demand (BOD)	mg/L											
Chemical Oxygen		1230	1380	838	889	1430	923	973	913	785	938	823
Demand (COD)	mg/L											
Oil & Grease	mg/L	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5
Total Organic Carbon		394	424	359	348	372	409	344	360	357	348	343
(TOC)	mg/L											
Boron	µg/L	5240	5440	4940	5240	5400	5180	5170	5030	5470	5170	4580
Calcium	mg/L	15.5	16.1	14.6	18.0	15.0	15.9	15.2	15.4	14.3	14.1	15.8
Iron	mg/L	1.51	1.58	1.33	1.67	1.51	1.74	1.65	1.43	1.41	1.37	1.44
Magnesium	mg/L	13.1	13.4	12.1	15.2	13.2	13.9	13.5	12.6	12.8	12.6	14
Potassium	mg/L	844	888	816	835	860	858	836	806	818	824	868
Cadmium	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chromium	µg/L	137	140	122	112	130	131	127	120	128	130	123
Copper	µg/L	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Nickel	µg/L	117	120	107	98	114	112	107	108	113	115	106
Zinc	µg/L	60	60	50	40	50	50	50	60	56	56	54

		12 Dec 21	13 Dec 21	14 Dec 21	15 Dec 21	16 Dec 21	17 Dec 21	18 Dec 21	19 Dec 21	20 Dec 21	21 Dec 21	22 Dec 21
<b>On-site Measurements</b>	6											
Temperature	°C	29.5	26.6	26.2	27.8	30.6	27.6	23.9	27.6	22	21.7	27.3
pH Value	pH Unit	8.4	8.4	8.5	8.4	8.4	8.4	8.3	8.4	8.4	8.5	8.4
Volume Discharged	m <sup>3</sup>	926	488	1170	1293	1201	1409	668	473	531	1195	1186
Laboratory Analysis		•										
Suspended Solids (SS)	mg/L	13.6	20.3	22.7	18.1	21.7	23.5	23.1	33.8	14.4	23.9	16.3
Alkalinity	mg/L	2120	2130	2190	2200	2210	2210	2200	2150	2160	2190	2170
Ammoniacal-nitrogen	mg/L	0.3	0.42	0.32	0.36	0.32	0.35	0.32	0.34	0.75	0.35	0.18
Chloride	mg/L	1780.0	1810	1860	2080	2090	1850	1850	1930	1960	1800	1770
Nitrite-nitrogen	mg/L	0.2	0.31	0.18	0.19	0.2	0.19	0.28	0.18	0.7	0.26	0.22
Phosphate	mg/L	9.8	10.6	10.4	10.4	10.7	10.3	10.8	10.9	11.2	11.5	10.5
Sulphate	mg/L	61.0	67	63	68	64	68	64	66	70	66	61
Total Nitrogen	mg/L	123.0	119	110	104	118	121	127	135	132	129	113
Nitrate-nitrogen	mg/L	72.5	67.5	56.7	54.8	65.8	68.9	74.4	77.4	76.2	74.2	64.1
Biochemical Oxygen		8	11	13	11	12	11	8	12	10	10	8
Demand (BOD)	mg/L											
Chemical Oxygen		804	880	938	900	919	1070	919	976	981	1050	1020
Demand (COD)	mg/L											
Oil & Grease	mg/L	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5
Total Organic Carbon		347.0	359	351	348	356	352	397	374	398	386	387
(TOC)	mg/L											
Boron	μg/L	4880.0	4660	4780	5040	5680	5540	5460	5590	5520	6050	5860
Calcium	mg/L	15.0	14.8	17.1	14.4	15	13.6	13.1	13.1	12.7	14.1	17.7
Iron	mg/L	1.3	1.42	1.54	1.29	1.35	1.32	1.28	1.41	1.26	1.53	1.56
Magnesium	mg/L	13.5	13.1	14.7	12.7	12.7	12.1	11.5	11.6	11.5	13.9	14.5
Potassium	mg/L	914.0	898	934	879	931	844	827	800	808	898	892
Cadmium	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chromium	µg/L	131.0	130	130	128	138	137	141	146	138	135	138
Copper	µg/L	<10	<10	<10	<10	<10	<10	<10	61	<10	<10	<10
Nickel	µg/L	115.0	112	112	112	119	121	123	122	116	115	116
Zinc	μg/L	56.0	59	58	55	61	56	57	100	48	54	62

		23 Dec 21	24 Dec 21	25 Dec 21	26 Dec 21	27 Dec 21	28 Dec 21	29 Dec 21	30 Dec 21	31 Dec 21
<b>On-site Measurements</b>	6									
Temperature	°C	25.8	25.7	20.7	23.3	20	22.6	27.6	28.9	26.2
pH Value	pH Unit	8.4	8.5	8.4	8.5	8.5	8.5	8.4	8.4	8.5
Volume Discharged	m <sup>3</sup>	934	957	1000	734	499	1120	1348	1435	1189
Laboratory Analysis		•								
Suspended Solids (SS)	mg/L	14.3	14	17.4	13.9	10.1	11.6	15.7	26	14.8
Alkalinity	mg/L	2110	2100	2120	2190	2190	2160	2200	2250	2210
Ammoniacal-nitrogen	mg/L	0.15	0.34	0.24	0.28	0.46	0.41	0.38	0.28	0.3
Chloride	mg/L	2030	2130	1880	1840	1950	1870	2070	2070	2050
Nitrite-nitrogen	mg/L	0.19	0.18	0.15	0.15	0.33	0.16	0.16	0.14	0.16
Phosphate	mg/L	9.85	9.8	10.2	9.33	10.1	10.2	8.2	7.67	8.56
Sulphate	mg/L	57	65	67	74	78	82	88	90	92
Total Nitrogen	mg/L	121	114	106	112	106	106	91.2	98.4	108
Nitrate-nitrogen	mg/L	70.7	57	56.5	54.5	54.3	53	42.4	47.6	57
Biochemical Oxygen	-	8	6	7	7	7	6	8	9	7
Demand (BOD)	mg/L									
Chemical Oxygen		1020	973	973	973	920	1130	1040	989	1010
Demand (COD)	mg/L									
Oil & Grease	mg/L	<5	<5	<5	<5	<5	<5	<5	<5	<5
Total Organic Carbon		338	340	368	362	394	340	335	359	388
(TOC)	mg/L									
Boron	µg/L	4530	4660	4700	4750	4950	4920	4810	4830	5350
Calcium	mg/L	17.5	16.8	14.6	15.9	14.9	16.1	17.6	17.6	17.8
Iron	mg/L	1.39	1.33	1.21	1.37	1.32	1.32	1.58	1.61	1.43
Magnesium	mg/L	13.6	13	11.3	13.8	14	15.4	21.2	22.1	20.3
Potassium	mg/L	854	865	759	847	857	848	885	885	824
Cadmium	µg/L	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chromium	μg/L	124	120	128	124	124	119	127	130	125
Copper	μg/L	24	<10	<10	<10	<10	<10	<10	<10	<10
Nickel	μg/L	101	98	116	116	119	114	120	124	112
Zinc	μg/L	68	58	54	58	57	58	54	58	54

Calibration Certificates for Groundwater Monitoring Equipment



ALS Technichem (HK) Pty Ltd 11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong T: +852 2610 1044 | F: +852 2610 2021

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT: CLIENT:	MR BEN TAM ACTION-UNITED ENVIRONMENTAL SERVICES &	WORK ORDER:	HK2143652
	CONSULTING	SUB-BATCH:	0
ADDRESS:	RM A 20/F., GOLD KING IND BLDG,	LABORATORY:	HONG KONG
	NO. 35-41 TAI LIN PAI ROAD, KWAI CHUNG, N.T.	DATE RECEIVED:	27-Oct-2021
		DATE OF ISSUE:	02-Nov-2021

### SPECIFIC COMMENTS

Equipment information (Brand name, Model No., Serial No. and Equipment No.) is provided by client. The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the laboratory or quoted from relevant international standards.

The validity of equipment/ meter performance only applies to the result(s) stated in the report.

Equipment Type:	Multifunctional Meter
Service Nature:	Performance Check
Scope:	Conductivity, Dissolved Oxygen, pH Value, Turbidity, Salinity and Temperature
Brand Name/ Model No.:	[YSI]/ [Professional DSS]
Serial No./ Equipment No.:	[17B102764/17B100758]/ [EQW019]
Date of Calibration:	02-November-2021

### **GENERAL COMMENTS**

This is the Final Report and supersedes any preliminary report with this batch number.

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

WORK ORDER:	HK2143652		ALS
SUB-BATCH: DATE OF ISSUE: CLIENT:	0 02-Nov-2021 ACTION-UNITED ENVIRONMEN	TAL SERVICES & CONSULTING	
Equipment Type:	Multifunctional Meter		
Brand Name/ Model No.:	[YSI]/ [Professional DSS]		
Serial No./ Equipment No.:	[17B102764/17B100758]/[EC	QW019]	
Date of Calibration:	02-November-2021	Date of Next Calibration:	02-February-2022

PARAMETERS:

Conductivity

Method Ref: APHA (21st edition), 2510B

Expected Reading (µS/cm)	Displayed Reading (µS/cm)	Tolerance (%)				
146.9	148.1	+0.8				
6667	6711	+0.7				
12890	12642	-1.9				
58670	53798	-8.3				
	Tolerance Limit (%)	±10.0				

Dissolved Oxygen

### n Method Ref: APHA (21st edition), 45000: G

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
3.44	3.30	-0.14
5.01	5.10	+0.09
8.23	8.25	+0.02
	Tolerance Limit (mg/L)	±0.20

pH Value

### Method Ref: APHA (21st edition), 4500H: B

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)				
4.0	4.07	+0.07				
7.0	7.12	+0.12				
10.0	9.91	-0.09				
	Tolerance Limit (pH unit)	±0.20				

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

	WORK ORDER:	HK2143652		ALS
	SUB-BATCH: DATE OF ISSUE: CLIENT:	0 02-Nov-2021 ACTION-UNITED ENVIRONMEN	TAL SERVICES & CONSULTING	
Bra Moo Seri	Equipment Type: Brand Name/ Model No.:	Multifunctional Meter [YSI]/ [Professional DSS]		
	Serial No./ Equipment No.:	[17B102764/17B100758]/ [EC	QW019]	
	Date of Calibration:	02-November-2021	Date of Next Calibration:	02-February-2022

PARAMETERS:

Turbidity

Method Ref: APHA (21st edition), 2130B

Expected Reading (NTU)	Displayed Reading (NTU)	Tolerance (%)
0	0.07	
4	4.08	+2.0
40	41.36	+3.4
80	75.86	-5.2
400	406.97	+1.7
800	810.23	+1.3
	Tolerance Limit (%)	±10.0

Salinity

### Method Ref: APHA (21st edition), 2520B

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)	
0	0.01		
10	9.96	-0.4	
20	19.84	-0.8	
30	29.56	-1.5	
	Tolerance Limit (%)	±10.0	

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

5

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

WORK ORDER:	HK2143652		ALS					
SUB-BATCH: DATE OF ISSUE: CLIENT:	0 02-Nov-2021 ACTION-UNITED ENVIRONMENT	AL SERVICES & CONSULTING						
Equipment Type: Brand Name/ Model No.: Serial No./ Equipment No.: Date of Calibration:	Multifunctional Meter [YSI]/ [Professional DSS] [17B102764/17B100758]/ [EQV 02-November-2021	V019] Date of Next Calibration:	02-February-2022					
PARAMETERS:								
Temperature		Method Ref: Section 6 of International Accreditation New Zealand Technical Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.						
	Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)					
	10.5	10.8	+0.3					

10.5	10.8	+0.3
21.5	21.3	-0.2
39.5	39.0	-0.5
	Tolerance Limit (°C)	±2.0
	·	

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu, Iris Assistant Manager - Inorganic

# Groundwater Monitoring Results

### Table F8.1 Groundwater Monitoring Results

Parameters	Units	MWX-1	MWX-2	MWX-3	MWX-4	MWX-5	MWX-6	MWX-7	MWX-8	MWX-9	MWX-10	MWX-11	MWX-12	MWX-13	MWX-14
Water Level	mPD	2.70	2.84	2.79	2.69	2.71	2.65	2.42	2.53	2.89	2.93	3.23	6.62	36.50	45.13
Bicarbonate Alkalinity as CaCO3	mg/L	138	309	147	<1	<1	<1	8	<1	75	167	135	60	15	8
Carbonate Alkalinity as CaCO3	mg/L	<1	<1	<1	100	98	164	58	75	10	<1	<1	<1	<1	<1
Total Alkalinity as CaCO3	mg/L	138	309	147	129	118	200	66	114	85	167	135	60	15	8
pH Value	pH Unit	8.3	7.9	8	10.7	10.6	10.8	9.8	10.7	8.6	7.9	8.1	7	5.5	5.3
Electrical Conductivity @ 25°C	μS/cm	747	799	1110	1110	1130	1160	2330	3050	1550	863	372	319	95	97
Ammonia as N	mg/L	0.29	0.02	1.33	6.79	1.95	3.52	5.42	12.5	5.34	0.03	0.02	< 0.01	0.04	< 0.01
Chloride	mg/L	116	29	197	246	193	177	681	1010	372	133	26	22	16	20
Nitrite as N	mg/L	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Reactive Phosphorus as P	mg/L	0.02	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	0.02	0.01	0.02	0.02	0.02	0.04	< 0.01	< 0.01
Sulphate as SO4 - Turbidimetric	mg/L	54	91	95	54	131	91	66	38	111	74	13	57	3	2
Sulphide as S2-	mg/L	0.1	< 0.1	< 0.1	7.7	3.1	9.6	1.8	11.8	0.3	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Total Kjeldahl Nitrogen as N	mg/L	0.4	0.2	1.7	7.4	2.6	4.8	5.9	12.9	6	< 0.1	0.1	< 0.1	0.4	0.2
Nitrate as N	mg/L	< 0.01	0.35	< 0.01	< 0.01	< 0.01	< 0.01	0.01	0.01	< 0.01	< 0.01	< 0.01	< 0.01	0.12	0.1
Total Nitrogen as N	mg/L	0.4	0.5	1.7	7.4	2.6	4.8	5.9	12.9	6	< 0.1	0.1	< 0.1	0.5	0.3
Boron	µg∕L	120	210	180	160	170	180	480	540	380	90	50	20	10	10
Calcium	mg/L	37.6	52.1	74.4	48.8	40.4	30.8	26.3	59.9	31.8	74.3	46.5	29.5	2.3	1.53
Mercury	µg∕L	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20
Magnesium	mg/L	5.22	47.4	5.64	< 0.05	< 0.05	< 0.05	1.01	0.12	12.4	7.03	2.5	4.62	1.02	1.04
Sodium	mg/L	85.7	28.8	111	128	141	154	419	488	233	83.3	25	27	14.1	12.9
Iron	mg/L	< 0.04	< 0.04	0.21	< 0.04	< 0.04	< 0.04	< 0.04	< 0.04	< 0.04	< 0.04	< 0.04	0.38	< 0.04	< 0.04
Potassium	mg/L	20.1	9.99	27.8	34.6	51.9	55.9	57.8	54.8	36.9	11.4	6.45	3.21	4.25	4.06
Cadmium	µg/L	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Chromium	µg∕L	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1
Copper	µg/L	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	1	1
Lead	µg/L	<1	<1	<1	<1	<1	3	<1	<1	<1	<1	<1	<1	<1	<1
Manganese	µg/L	417	216	956	2	<1	<1	<1	<1	8	1090	363	800	36	9
Nickel	µg/L	<1	<1	<1	2	1	2	<1	1	<1	<1	<1	<1	<1	<1
Zinc	µg/L	<10	260	<10	<10	<10	<10	<10	<10	<10	<10	<10	360	20	<10
Biochemical Oxygen Demand	mg/L	<2	<2	<2	<2	<2	7	<2	8	2	<2	<2	<2	<2	<2
Chemical Oxygen Demand	mg/L	11	3	19	36	28	56	23	44	20	6	4	<2	<2	<2
Total Organic Carbon	mg/L	6	4	9	11	10	13	8	11	9	4	4	4	4	4

Investigation Reports of Environmental Quality Limit Exceedance

Project	South East New Territories (SENT) Landfill Extension
Date	8 December 2021
Time	10:15
Monitoring Location	MWX-6
Parameter	Chemical Oxygen Demand (COD)
Action / Limit Levels	>46 mg /L
Measured Level	56 mg /L
Possible reason	<ul> <li>Joing /L</li> <li>Groundwater contaminated with leachate is commonly characterized by high COD and ammoniacal-nitrogen levels as a result of degradation of organic matters in the waste. The groundwater quality (ammoniacal-nitrogen) monitoring results at MWX-6 (3.52mg/L) and groundwater quality (COD) monitoring results of the groundwater monitoring wells adjacent to MWX-6 (MWX-5: 28 mg/L and MWX-7: 23 mg/L) are well within the respective limit levels. In addition, no exceedance of COD Limit Levels for groundwater monitoring at other monitoring wells was recorded in the sampling event. Hence, there is a low possibility of the slight elevation of COD level at MWX-6 is due to leachate contamination from SENTX operation or at least it is not conclusive to base on this result to demonstrate exceedance is due to leachate contamination.</li> <li>In accordance with Table 4.5b of the updated EM&amp;A Manual, repeat measurement was conducted on 4 January 2022 to confirm findings. COD concentration of 44 mg/L (below Limit Level) was measured during the sampling event, which demonstrates no consecutive groundwater quality impact at MWX-6.</li> <li>In addition, in accordance with the findings of the desktop review commissioned by GVL and EPD (the Employer) in May 2021 to investigate the potential sources of the elevated methane levels at the perimeter landfill gas monitoring wells at SENTX, pockets of organic matters are identified in the fill materials of the SENTX site upon review of the historical site investigation borehole logs at the Project Site area. It is possible that the elevated COD concentration measured at MWX-6 (in close proximity to LFG13, which shows elevated methane levels continuous) on 8 December 2021could be due to localised organic matters within or around the monitoring</li> </ul>
	well. Due to the presence of influencing factor from non-project source; the COD levels at all other groundwater monitoring wells are within the respective limit level, and the subsequent month monitoring results at MWX-6 did not show exceedance, there is no adequate evidence showing that the COD level exceedance measured at MWX-6 on 8 December 2021 was deemed to Project-

# Investigation Report of Environmental Quality Limit Exceedance


	related activities.		
Action Taken / Action to be Taken	Examination of environmental performance of the Project will be continued during the weekly inspections. The Contractor is reminded to implement relevant and appropriate mitigation measures according to the updated EM&A Manual to avoid any exceedance of the Action and Limit Levels.		
Remarks	-		
Prepared by: Abbey Lau			
Designation: Environmenta	l Team		
Date: 26 January 202	22		

Annex G

# Landfill Gas

Annex G1

Landfill Gas Monitoring Locations for Service Voids, Utilities and Manholes along the Site Boundary and Within the SENTX Site

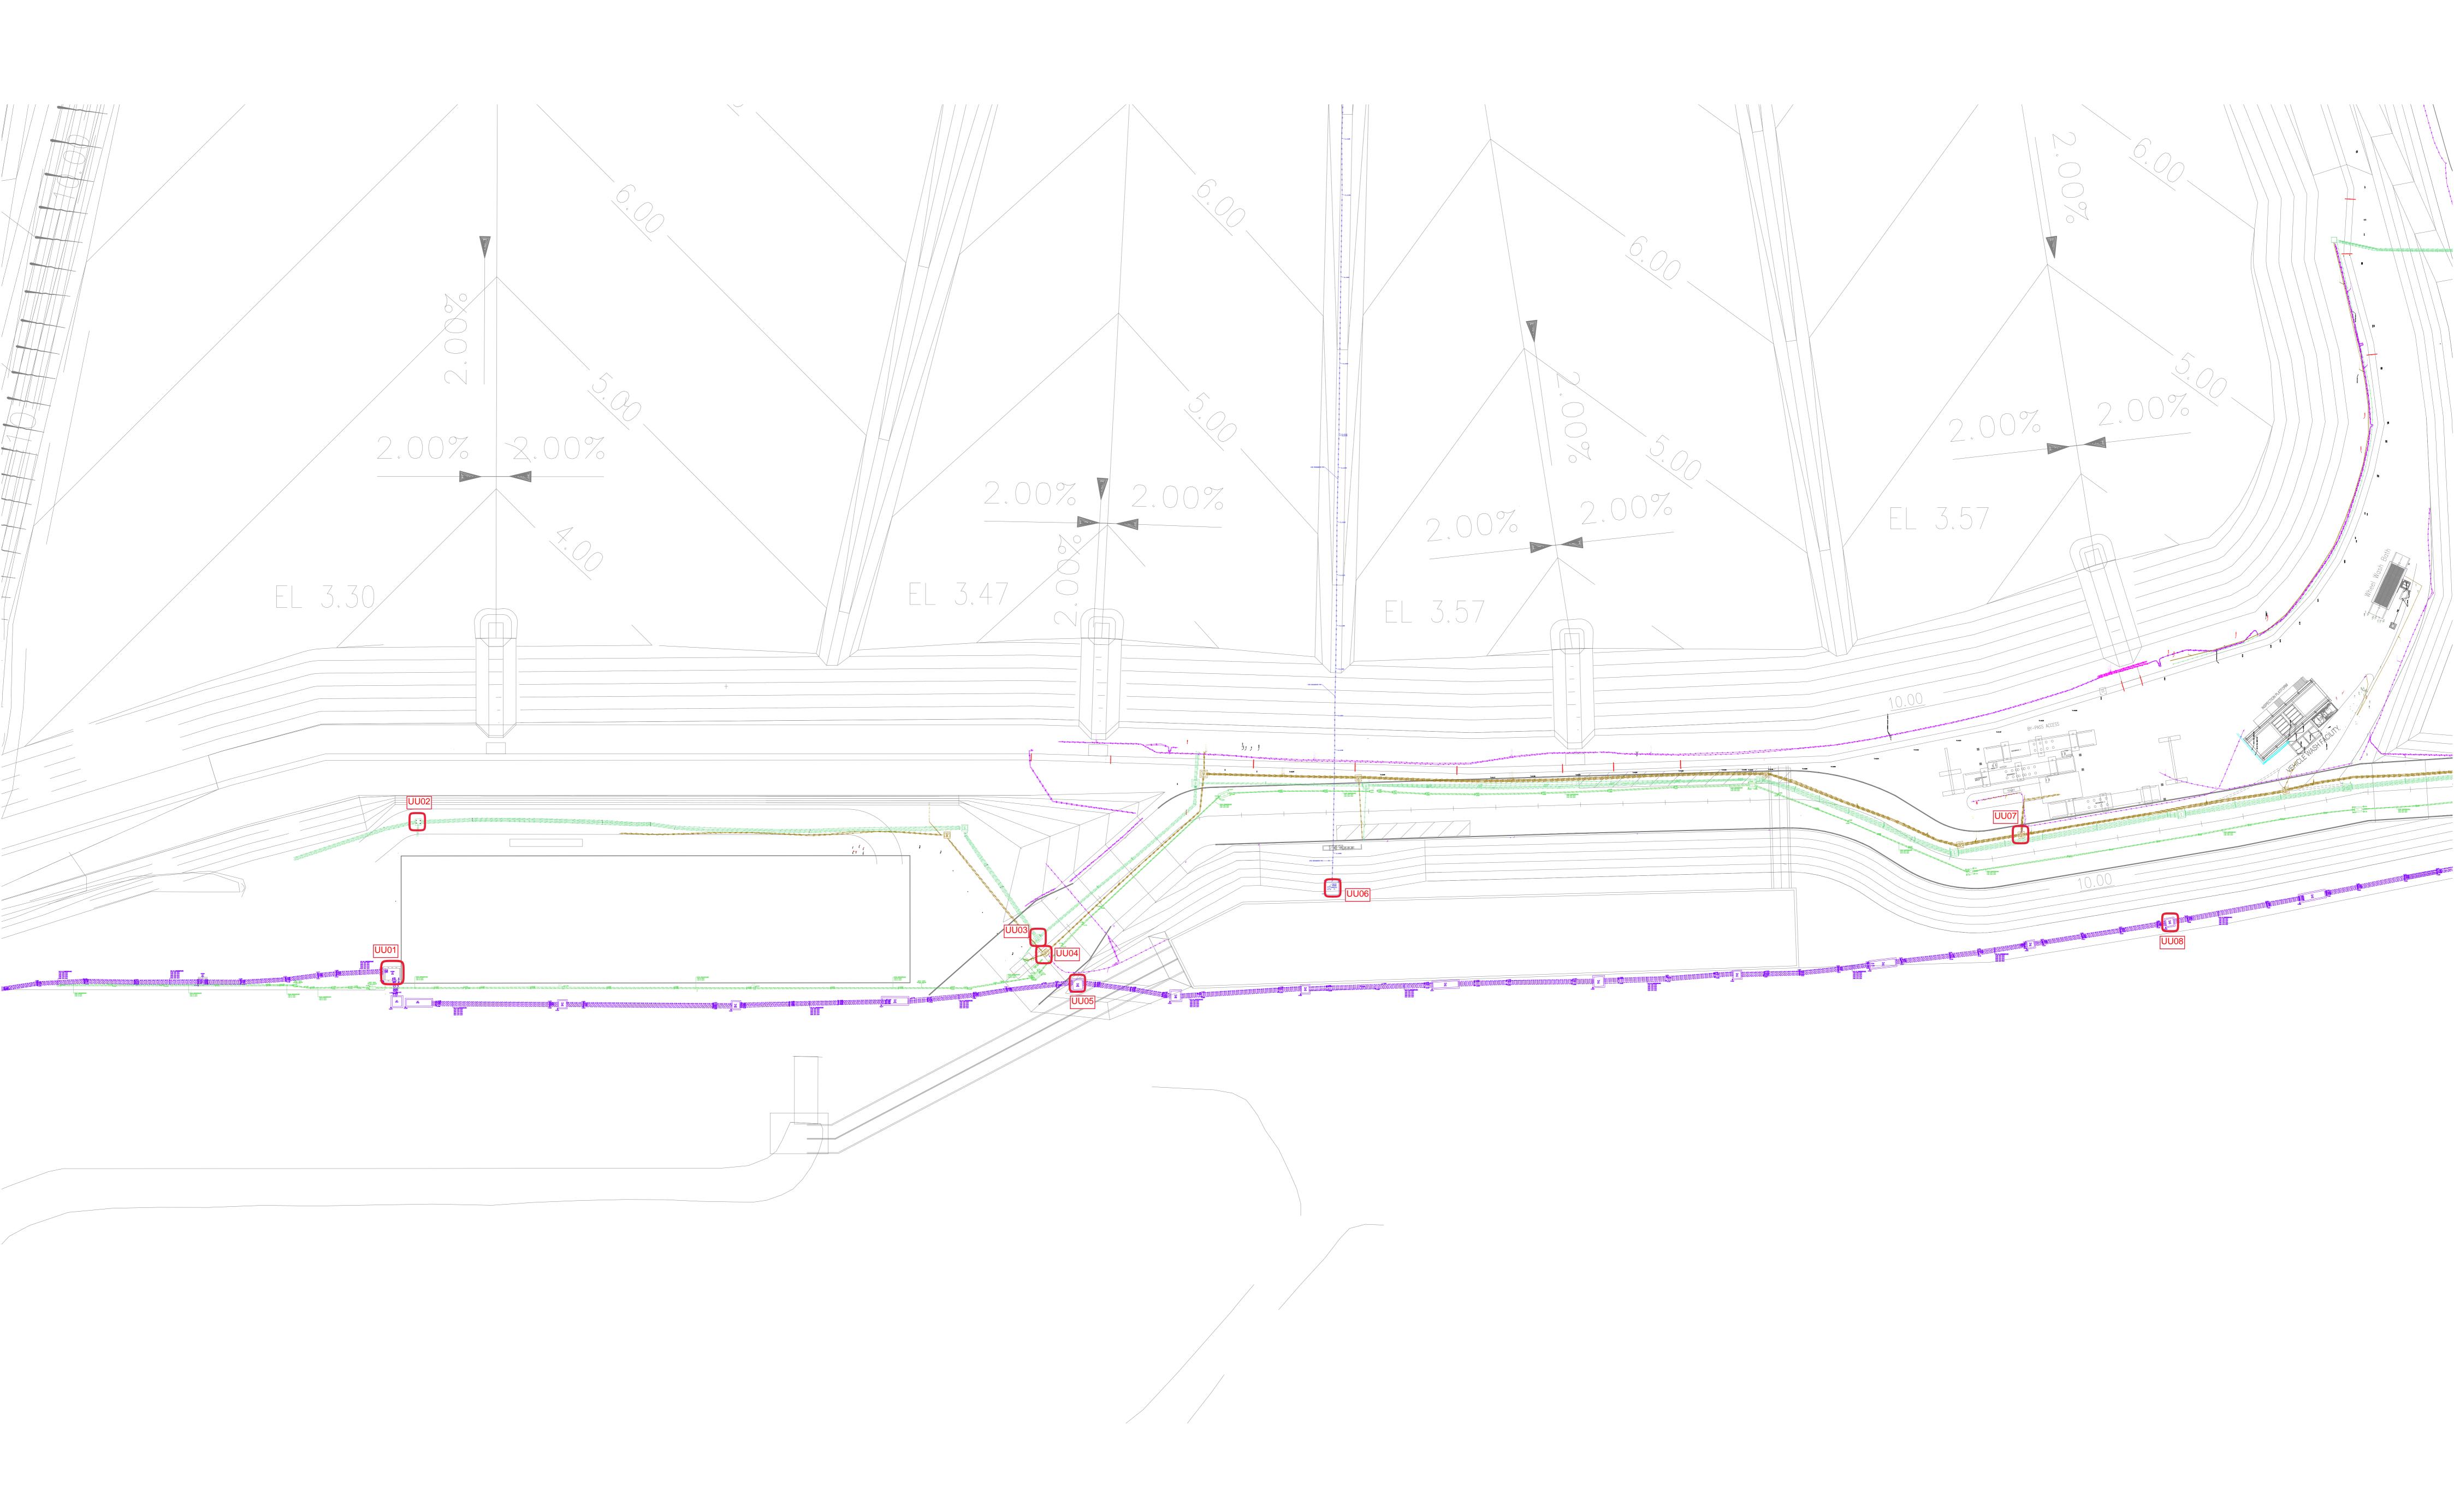



Annex G2

Calibration Certificates for Landfill Gas Monitoring Equipment ALS

ALS Technichem (HK) Pty Ltd 11/F, Chung Shun Knitting Centre 1-3 Wing Yip Street, Kwai Chung N.T., Hong Kong T: +852 2610 1044 | F: +852 2610 2021

# CERTIFICATE OF ANALYSIS

CONTACT: MR IVAN LEUNG CLIENT: ALS TECHNICHEM (HK) PTY LTD ADDRESS: 11/F., CHUNG SHUN KNITTING CENTRE, 1-3 WING YIP STREET, KWAI CHUNG, N.T.

### WORK ORDER: HK2106687

SUB BATCH:0LABORATORY:HONG KONGDATE RECEIVED:17-Feb-2021DATE OF ISSUE:25-Feb-2021

### SPECIFIC COMMENTS

Equipment information (Brand name, Model No., Serial No. and Equipment No.) is provided by client. The performance of the equipment stated in this report is checked with independent reference material and results are compared against a calibrated secondary source.

The "Instrument Specification" quoted is the acceptance criteria applicable for similar equipment used by the laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principles as practised by the laboratory or quoted from relevant international standards.

The validity of equipment/ meter performance only applies to the result(s) stated in the report.

Equipment Type:	Landfill Gas Analyser
Service Nature:	Performance Check
Scope:	Carbon dioxide, Methane and Oxygen
Brand Name/ Model No.:	GA5000
Serial No./Equipment No.:	G507306 (HK1935)
Date of Calibration:	25 February, 2021

### **GENERAL COMMENTS**

This is the Final Report and supersedes any preliminary report with this batch number.

Ms Chan Ka Yu, Karen Manager - Organics

This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.

Page 1 of 2

## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

Work Order: Sub-Batch: Client: Date of Issue:	HK2106687 0 ALS TECHNICHEM (HK) PTY LTD 25-Feb-2021
Equipment Type: Brand Name/ Model No.:	Landfill Gas Analyser GA5000
Serial No./ Equipment No.:	G507306 (HK1935)
Date of Calibration:	25 February, 2021



Date of next Calibration: 25 February, 2022

Parameters:

Methane

Calibrated Gas Standard, %	Monitor Readout, %	% error	Instrument Specification, %
0.0 (Nitrogen)	0.0	0.0	± 0.5
1.0	1.0	0.0	± 0.5
10.0	9.9	-0.1	± 0.5

#### Carbon Dioxide

Calibrated Gas Standard, %	Monitor Readout, %	% error	Instrument Specification, %
0.0 (Nitrogen)	0.0	0.0	± 0.5
1.0	1.0	0.0	± 0.5
10.0	10.1	0.1	± 0.5

Oxygen

Calibrated Gas Standard, %	Monitor Readout, %	% error	Instrument Specification, %
0.0 (Nitrogen)	0.0	0.0	± 1.0
23.5	23.6	0.1	± 1.0

aren

Ms Chan Ka Yu, Karen Manager - Organics

Annex G3

## Landfill Gas Monitoring Results

Location	Water Level (mPD)	Methane (% (v/v))	Carbon Dioxide (% (v/v))	Oxygen (% (v/v))
LFG1	2.40	0.0	0.1	18.9
LFG2	2.30	0.0	0.1	19.9
LFG3	2.33	0.0	0.9	17.4
LFG4	2.32	0.0	0.0	20.1
LFG5	2.65	0.0	0.2	7.2
LFG6	2.29	0.0	0.1	19.3
LFG7	2.48	0.0	0.0	17.6
LFG8	2.42	0.0	0.0	19.3
LFG9	2.38	0.0	0.1	8.8
LFG10	2.12	0.0	0.0	18.0
LFG11	2.29	0.0	0.1	7.8
LFG12	2.23	0.0	0.0	19.6
LFG13	2.07	19.6	0.0	0.4
LFG14	1.81	0.0	0.0	16.2
LFG15	2.05	1.8	0.4	12.7
LFG16	2.19	0.0	0.1	18.6
LFG17	2.38	0.0	0.2	0.8
LFG18	2.59	0.0	0.1	19.3
LFG19	2.74	0.0	0.1	3.6
LFG20	2.80	0.0	1.1	17.0
LFG21	2.85	0.0	2.0	9.7
LFG22	2.62	0.0	1.0	16.3
LFG23	12.52	0.0	2.1	18.1
LFG24	6.33	0.0	0.9	19.0
GP1	Probe bent	0.2	5.2	14.6
GP2 (shallow)	Probe bent	0.5	0.3	19.2
GP2 (deep)	Probe bent	0.2	0.1	19.6
GP3 (shallow)	Probe bent	0.3	2.5	14.4
GP3 (deep)	Probe bent	0.1	0.2	19.3
GP4 (shallow)	Probe bent	0.6	0.7	19.0
GP4 (deep)	Probe bent	0.7	1.7	17.4
GP5 (shallow)	Probe bent	0.1	5.4	16.8
GP5 (deep)	38.80	0.1	0.3	19.5
GP6	37.19	0.0	5.6	14.4
GP7	36.21	0.0	0.1	20.0
GP12	1.83	0.0	0.0	20.1
GP15	2.34	0.0	0.0	20.0
P7	2.32	0.0	0.0	20.0
P8	2.44	0.0	0.0	20.1
Р9	2.26	0.0	0.0	20.1

### Table G3.1Landfill Gas Monitoring Results at Perimeter LFG Monitoring Wells

Location	<b>Methane (% (v/v))</b>	Carbon Dioxide (% (v/v))	Oxygen (% (v/v))
UU01	0.1	0.0	20.7
UU02	0.0	0.0	20.7
UU03	0.0	0.0	20.5
UU04	0.1	0.0	20.6
UU05	0.0	0.0	20.6
UU06	0.0	0.0	20.5
UU07	0.1	0.0	20.4
UU08	0.0	0.0	20.5
UU09	0.2	0.0	20.1
UU10	0.1	0.0	20.3
UU11	Inaccess	ible due to on-going const	ruction work
UU12	Inaccess	ible due to on-going const	ruction work
UU13	Inaccess	ible due to on-going const	ruction work
UU14	Inaccess	ible due to on-going const	ruction work
UU15	0.1	0.0	20.2
UU16	0.1	0.0	20.3
UU17	0.3	0.0	20.3
UU18	0.1	0.0	20.3
UU19	0.0	0.0	20.7
UU20	0.1	0.0	20.3
UU21	0.0	0.0	19.4
UU22	0.0	0.0	19.3
UU23	0.0	0.0	19.3
UU24	0.0	0.0	19.3
UU25	0.0	0.0	19.2
UU26	0.0	0.0	20.1
UU27	0.0	0.0	19.5
UU28	0.0	0.0	19.8

Annex G4

## Event and Action Plan for Landfill Gas Monitoring

Event	Action					
	ET	IEC	Contractor			
Limit Level being exceeded for field monitoring at the perimeter monitoring wells	<ul> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project for monitoring wells in the areas where there is development within 250m of the SENTX Site Boundary and to weekly for other monitoring wells, until no exceedance of limit level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Repeat field measurement to confirm findings</li> <li>Check the performance of landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Discuss with the ET and IEC and submi proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>			
Limit Level being exceeded for the bulk gas sampling at the perimeter monitoring wells	<ul> <li>Check and compare the results of field monitoring and laboratory analyse of bulk samples</li> <li>If the results of field monitoring also show exceedance, the action(s) for limit level being exceeded for field monitoring would have been triggered</li> <li>If the results of field monitoring does not show exceedance, the sampling procedures should be checked and if deems necessary, to repeat the monitoring and recalibrate the portable monitoring instruments</li> <li>Notify the above findings to Contractor and IEC</li> </ul>		• Nil			

### Annex G4 Event and Action Plan for Landfill Gas Monitoring

Event	Action					
	ET	IEC	Contractor			
Limit Level being exceeded at the permanent gas monitoring system	<ul> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check the methane gas level at the perimeter monitoring wells, manholes or utilities duct</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Evacuate all staff in the concerned building</li> <li>Open the doors and window of all rooms on the ground floor</li> <li>Do not allow staff to go back to the room if methane level is higher than 1% gas</li> <li>Check the performance of the landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>			
Limit Level being exceeded during surface emission monitoring	<ul> <li>Repeat the measurement to confirm findings</li> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to monthly if exceedance is due to the Project until no exceedance of limit level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Check landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>			

Event	Action					
	ET	IEC	Contractor			
Limit Level being exceeded at the service voids, utilities pits, manholes and location of vegetation stress	<ul> <li>Repeat the measurement to confirm findings</li> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to weekly if exceedance is due to the Project until no exceedance of limit level</li> </ul>	<ul> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>the effectiveness of the implemented remedial measures</li> </ul>	<ul> <li>Check landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Discuss with the ET and IEC and submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>			

Annex H

Cumulative Statistics on Exceedances, Environmental Complaints, Notification of Summons and Status of Prosecutions

		Total No. recorded in this reporting period	Total No. recorded since project
Air Quality (Duct)	Action	0	commencement 0
Air Quality (Dust)	Limit	•	·
		1	1
Air Quality (Odour)	Action	0	0
	Limit	0	0
Air Quality (Emissions of Thermal	Limit	0	0
Oxidiser)			
Air Quality (Emissions of Landfill	Limit	1	1
Gas Flare)			
Air Quality (Emissions of Landfill	Limit	0	0
Gas Generator)			
Noise	Action	0	0
	Limit	0	0
Water Quality (Surface Water)	Limit	0	57
Water Quality (Leachate)	Limit	0	0
Water Quality (Groundwater)	Limit	1	1
Landfill Gas (Perimeter Landfill Gas	Limit	0	0
Monitoring Wells)			
Landfill Gas (Service Void, Utilities	Limit	0	0
and Manholes)			
Landfill Gas (Permanent Gas	Limit	0	0
Monitoring System)			

### Table H1Cumulative Statistics on Exceedances

# Table H2Cumulative Statistics on Complaints, Notifications of Summons and Successful<br/>Prosecutions

Reporting Period	Cumulative Statistics			
	Complaints	Notifications of Summons	Prosecutions	
This Reporting Period (1 - 31 Dec 2021)	0	0	0	
Total no. received since project commencement	1	0	0	

Annex I

Monitoring Schedule for the Next Reporting Period

#### South East New Territories (SENT) Landfill Extension

EM&A Impact Monitoring Schedule during Operation/ Restoration Phase

Sun	Mon	Tue	Wed	Thu	Fri	Sat
						Odour Monitoring Leachate Monitoring
2 Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring	3 Odour Monitoring Leachate Monitoring Groundwater Monitoring	5 Odour Monitoring Leachate Monitoring	6 Odour Monitoring Leachate Monitoring Dust Monitoring	7 Odour Monitoring Leachate Monitoring Noise Monitoring	Odour Monitoring Leachate Monitoring
9 Odour Monitoring Leachate Monitoring	l ( Odour Monitoring Leachate Monitoring	) 11 Odour Monitoring Leachate Monitoring Groundwater Monitoring	12 Odour Monitoring Leachate Monitoring Stack Monitoring Dust Monitoring	13 Odour Monitoring Leachate Monitoring Noise Monitoring	14 Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring
16 Odour Monitoring Leachate Monitoring	i Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Perimeter LFG Monitoring Dust Monitoring	19 Odour Monitoring Leachate Monitoring Noise Monitoring	20 Odour Monitoring Leachate Monitoring Service Void LFG Monitoring	21 Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring
23 Odour Monitoring Leachate Monitoring	24 Odour Monitoring Leachate Monitoring Dust Monitoring	Codour Monitoring Leachate Monitoring Noise Monitoring Surface Water Monitoring	26 Odour Monitoring Leachate Monitoring	27 Odour Monitoring Leachate Monitoring	28 Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring
3C Odour Monitoring Leachate Monitoring Dust Monitoring	3. Odour Monitoring Leachate Monitoring Noise Monitoring					

January 2022