



翠谷工程有限公司  
Green Valley Landfill, Limited

## South East New Territories (SENT) Landfill Extension

### Quarterly Environmental Monitoring & Audit Report No.12

March 2022

**ERM**

2509, 25/F  
One Harbourfront  
18 Tak Fung Street  
Hung Hom, Kowloon  
Hong Kong  
T: 2271 3000  
F: 3015 8052  
[www.erm.com](http://www.erm.com)





翠谷工程有限公司  
Green Valley Landfill, Limited

## South East New Territories (SENT) Landfill Extension

### Environmental Certification Sheet EP-308/2008/B and FEP-01/308/2008/B

#### Reference Document/Plan

Document/Plan to be Certified/Verified:	Quarterly Environmental Monitoring & Audit Report No. 12 for South East New Territories (SENT) Landfill Extension
Date of Report:	8 March 2022

#### Reference EM&A Manual Requirement

EM&A Manual:	Section 11.4
The quarterly EM&A summary report shall be prepared by the ET, certified by the ET Leader and verified by the IEC. The quarterly EM&A summary report should contain all information listed under Section 11.4 of the approved EM&A Manual.	

#### ET Certification

I hereby certify that the above referenced document/plan complies with the above referenced EM&A Manual requirement.

Frank Wan,  
Environmental Team Leader:  
(ERM Hong-Kong, Limited)

Date: 8 March 2022

#### IEC Verification

I hereby verify that the above referenced document/plan complies with the above referenced EM&A Manual requirement.

W.K. Chiu,  
Independent Environmental Checker:  
(Meinhardt Infrastructure and  
Environment Limited)



Date: 10 March 2022

# South East New Territories (SENT) Landfill Extension

## Quarterly Environmental Monitoring & Audit Report No.12

### Environmental Resources Management

2509, 25/F, One Harbourfront  
18 Tak Fung Street  
Hung Hom, Kowloon  
Hong Kong  
Telephone: (852) 2271 3000  
Facsimile: (852) 3015 8052  
E-mail: post.hk@erm.com  
http://www.erm.com

Client:  Green Valley Landfill Ltd.		Project No:  0465169			
Summary:  This document presents the Quarterly EM&A Report No.12 for <i>South East New Territories (SENT) Landfill Extension</i>		Date: 8 March 2022			
		Approved by:   Frank Wan Partner			
0	Quarterly EM&A Report No.12	AL	FW	FW	8 Mar 22
Revision	Description	By	Checked	Approved	Date
<p>This report has been prepared by Environmental Resources Management the trading name of 'ERM Hong-Kong, Limited', with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client.</p> <p>We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.</p> <p>This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk.</p>		<p>Distribution</p> <p><input type="checkbox"/> Internal</p> <p><input checked="" type="checkbox"/> Public</p> <p><input type="checkbox"/> Confidential</p> 			

## CONTENTS

	<i>EXECUTIVE SUMMARY</i>	<i>1</i>
<i>1</i>	<i>INTRODUCTION</i>	<i>1</i>
<i>1.1</i>	<i>BACKGROUND</i>	<i>1</i>
<i>1.2</i>	<i>PROJECT DESCRIPTION</i>	<i>1</i>
<i>1.3</i>	<i>SCOPE OF THE EM&amp;A REPORT</i>	<i>2</i>
<i>1.4</i>	<i>PROJECT ORGANISATION</i>	<i>2</i>
<i>1.5</i>	<i>SUMMARY OF CONSTRUCTION WORKS</i>	<i>3</i>
<i>1.6</i>	<i>SUMMARY OF EM&amp;A PROGRAMME REQUIREMENTS</i>	<i>5</i>
<i>1.7</i>	<i>STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT</i>	<i>6</i>
<i>1.8</i>	<i>STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS</i>	<i>6</i>
<i>2</i>	<i>EM&amp;A RESULTS</i>	<i>8</i>
<i>2.1</i>	<i>AIR QUALITY MONITORING</i>	<i>8</i>
<i>2.2</i>	<i>NOISE MONITORING</i>	<i>17</i>
<i>2.3</i>	<i>WATER QUALITY MONITORING</i>	<i>20</i>
<i>2.4</i>	<i>LANDFILL GAS MONITORING</i>	<i>29</i>
<i>2.5</i>	<i>LANDSCAPE AND VISUAL MONITORING</i>	<i>33</i>
<i>2.6</i>	<i>EM&amp;A SITE INSPECTION</i>	<i>34</i>
<i>2.7</i>	<i>WASTE MANAGEMENT STATUS</i>	<i>37</i>
<i>2.8</i>	<i>IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES</i>	<i>38</i>
<i>2.9</i>	<i>SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANCE LIMIT</i>	<i>38</i>
<i>2.10</i>	<i>SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS</i>	<i>38</i>
<i>3</i>	<i>CONCLUSION AND RECOMMENDATION</i>	<i>40</i>

## *ANNEXES*

*ANNEX A WORK PROGRAMME*

*ANNEX B ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE*

*ANNEX C MONITORING SCHEDULE FOR THIS REPORTING PERIOD*

*ANNEX D AIR QUALITY*

*ANNEX D1 24-HOUR TSP MONITORING RESULTS*

*ANNEX D2 EVENT AND ACTION PLAN FOR AIR QUALITY MONITORING*

*ANNEX D3 METEOROLOGICAL DATA*

*ANNEX D4 ODOUR MONITORING RESULTS*

*ANNEX D5 THERMAL OXIDIZER, LANDFILL GAS FLARE AND LANDFILL GAS GENERATOR STACK EMISSION MONITORING RESULTS*

*ANNEX D6 INVESTIGATION REPORTS OF ENVIRONMENTAL QUALITY LIMIT EXCEEDANCE*

*ANNEX E NOISE*

*ANNEX E1 NOISE MONITORING RESULTS*

*ANNEX E2 EVENT AND ACTION PLAN FOR NOISE MONITORING*

*ANNEX F WATER QUALITY*

*ANNEX F1 SURFACE WATER QUALITY MONITORING RESULTS*

*ANNEX F2 EVENT AND ACTION PLAN FOR WATER QUALITY MONITORING*

*ANNEX F3 LEACHATE LEVELS MONITORING RESULTS*

*ANNEX F4 EFFLUENT QUALITY MONITORING RESULTS*

*ANNEX F5 GROUNDWATER MONITORING RESULTS*

*ANNEX F6 INVESTIGATION REPORTS OF ENVIRONMENTAL QUALITY LIMIT EXCEEDANCE*

*ANNEX G LANDFILL GAS*

*ANNEX G1 LANDFILL GAS MONITORING LOCATIONS FOR SERVICE VOIDS, UTILITIES AND MANHOLES ALONG THE SITE BOUNDARY AND WITHIN THE SENTX SITE*

*ANNEX G2 LANDFILL GAS MONITORING RESULTS*

*ANNEX G3 EVENT AND ACTION PLAN FOR LANDFILL GAS MONITORING*

*ANNEX H CUMULATIVE STATISTICS ON EXCEEDANCES, ENVIRONMENTAL COMPLAINTS, NOTIFICATION OF SUMMONS AND STATUS OF PROSECUTIONS*

## **EXECUTIVE SUMMARY**

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. ERM-Hong Kong, Limited (ERM) is commissioned to undertake the role of Environmental Team (ET) for the construction, operation/restoration and aftercare of SENTX Project (“the Project”) in accordance with the requirements specified in the Environmental Permit (EP), updated Environmental Monitoring and Audit (EM&A) Manual, the approved Environmental Impact Assessment (EIA) Report of the Project taking account of the latest design and other relevant statutory requirements. The construction (not including works related to site clearance and preparation) of the Project commenced on 2 January 2019.

This Quarterly EM&A report presents the EM&A works carried out during the period from 1 October to 31 December 2021 for the Project in accordance with the updated EM&A Manual.

### **Exceedance of Action and Limit Levels for Air Quality**

One exceedance of the Limit Level for Total Suspended Particulates (TSP) and one exceedance of the Limit Level for landfill gas flare stack emission (Carbon Monoxide (CO)) were recorded for air quality impact monitoring in the reporting period. The TSP exceedance at AM4 on 13 December 2021 was considered non Project-related upon further investigation. The landfill gas flare stack emission (CO) exceedance on 17 December 2021 was found to be Project-related.

### **Exceedance of Action and Limit Levels for Noise**

No exceedance of Action and Limit Levels for construction and operation/restoration phase noise monitoring was recorded in the reporting period.

### **Exceedance of Action and Limit Levels for Water Quality**

One exceedance of the Limit Level for groundwater (Chemical Oxygen Demand (COD)) was recorded for water quality impact monitoring in the reporting period. The groundwater (COD) exceedance at MWX-6 on 8 December 2021 was considered non Project-related upon further investigation.

### **Exceedance of Action and Limit Levels for Landfill Gas**

No exceedance of Action and Limit Levels for operation/restoration phase landfill gas monitoring was recorded in the reporting period.

### **Environmental Complaints, Summons and Prosecutions**

There were no complaints, notification of summons or prosecution recorded in the reporting period.

## Reporting Change

There was no reporting change in the reporting period.

# 1 INTRODUCTION

## 1.1 BACKGROUND

The SENT Landfill Extension (SENTX) forms an integral part in the Strategic Plan in maintaining the continuity of landfill capacity in the Hong Kong for the cost-effective and environmentally satisfactory disposal of waste. The *Environmental Impact Assessment (EIA) Report* and the associated *Environmental Monitoring and Audit (EM&A) Manual* for the construction, operation, restoration and aftercare of the SENTX (hereafter referred to as “the Project”) have been approved under the *Environmental Impact Assessment Ordinance (EIAO)* in May 2008 (Register No.: AEIAR-117/2008) (hereafter referred to as the approved EIA Report) and an Environmental Permit (EP-308/2008) (EP) was granted by the Director of Environmental Protection (DEP) on 5 August 2008.

Since then, applications for Variation of an Environmental Permit (No. VEP-531/2017) were submitted to EPD and the Variation of Environmental Permits (EP-308/2008/A and EP-308/2008/B) were granted on 6 January 2012 and 20 January 2017, respectively, as the Hong Kong SAR Government has decided to reduce the scale of the design scheme of SENTX assessed in the approved EIA Report and SENTX will only receive construction waste. In May 2018, a Further Environmental Permit (FEP) (FEP-01/308/2008/B) was granted to the SENTX’s contractor, Green Valley Landfill, Limited (GVL).

ERM-Hong Kong, Limited (ERM) and Meinhardt Infrastructure and Environment Limited (Meinhardt) are commissioned to undertake the roles of Environmental Team (ET) and the Independent Environmental Checker (IEC), respectively, to undertake the EM&A activities for the Project in accordance with the requirements specified in the EP, updated EM&A Manual <sup>(1)</sup>, approved EIA Report <sup>(2)</sup> taking account of the latest design and other relevant statutory requirements.

## 1.2 PROJECT DESCRIPTION

The SENTX is a piggyback landfill, occupying the southern part of the existing SENT Landfill (including its infrastructure area) and 13 ha of Tseung Kwan O (TKO) Area 137. A layout plan of the SENTX is shown in *Figure 1.1*. Under the latest design, the SENTX has a net void capacity of about 6.5 Mm<sup>3</sup> and provides an additional lifespan of about 6 years, commencing operation upon exhaustion of the SENT Landfill. The SENTX will receive construction waste only.

(1) ERM (2018). South East New Territories (SENT) Landfill Extension: Environmental Monitoring & Audit Manual

(2) ERM (2007). South East New Territories (SENT) Landfill Extension - Feasibility Study: Environmental Impact Assessment Report



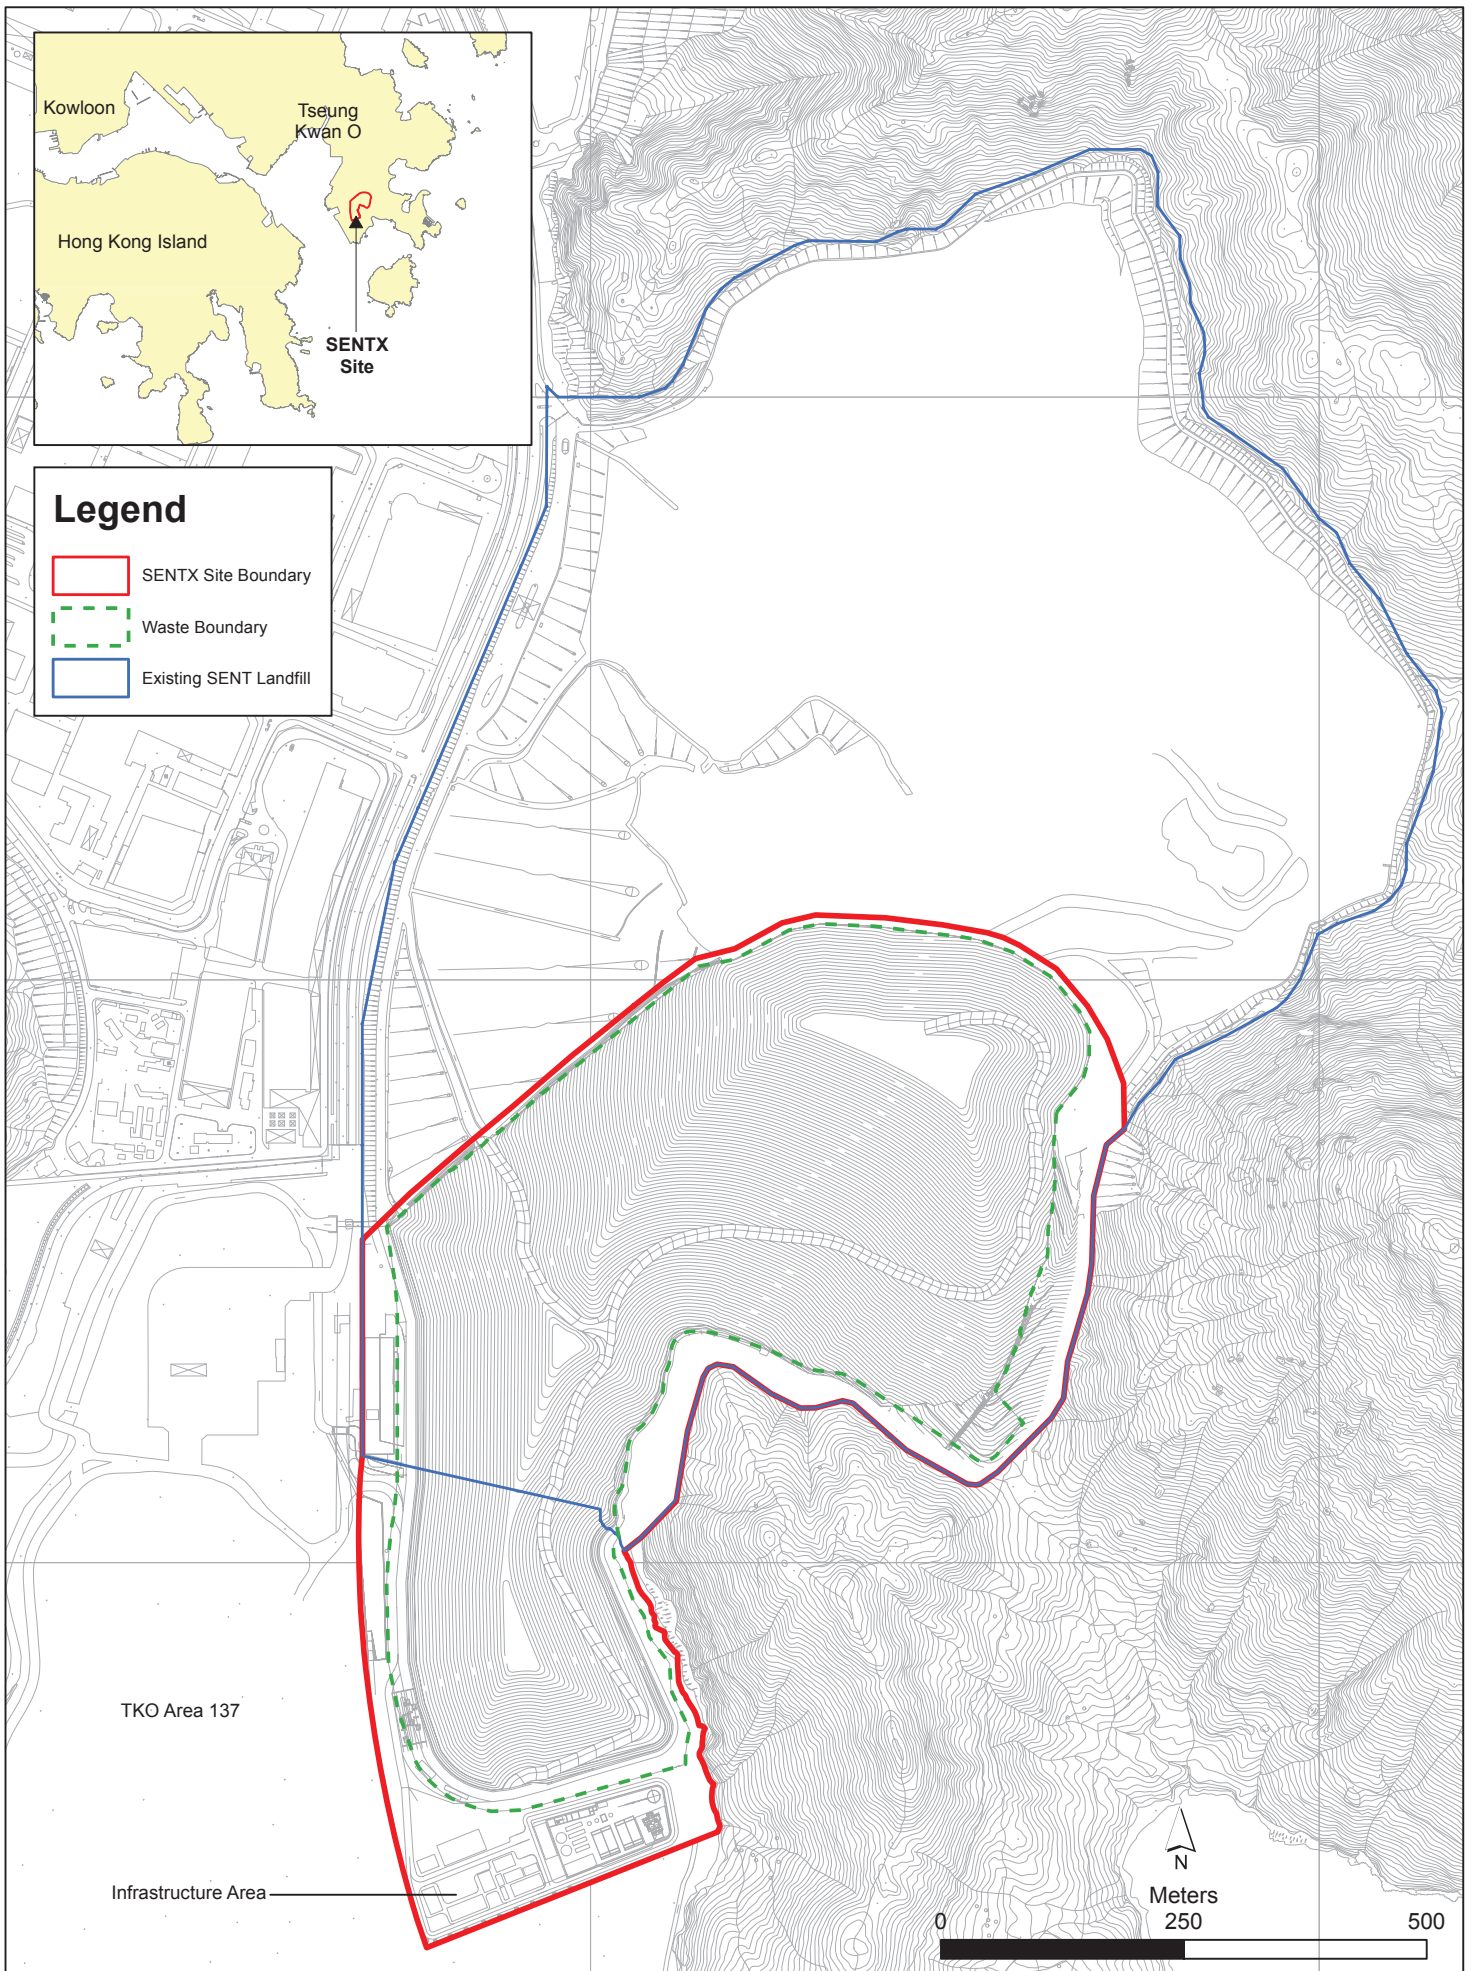


Figure 1.1

Layout Plan of SENTX

Environmental  
Resources  
Management



The key implementation milestones of the Project are indicatively summarised in *Table 1.1*. The construction works and operation of the Project commenced on 2 January 2019 and 21 November 2021, respectively.

**Table 1.1** *Estimated Key Dates of Implementation Programme*

<b>Key Stage of the Project</b>	<b>Indicative Date</b>
Start construction	2 January 2019
Commissioning of new infrastructure facilities	2020
Demolition of existing infrastructure facilities	2021
Start waste intake at SENTX	21 November 2021
Estimated exhaustion date of SENTX	2027
End of aftercare for SENTX	2057

The major construction works of the SENTX includes:

- Site formation at the TKO Area 137 and the existing infrastructure area at SENT Landfill;
- Construction of surface and groundwater drainage systems;
- Construction of the leachate containment and collection systems;
- Construction of new leachate and landfill gas treatment facilities, site offices, maintenance yards at the new infrastructure area;
- Construction of new pipelines to transfer the leachate and landfill gas collected from the existing SENT Landfill to the treatment facilities at the new infrastructure area;
- Construction of the site access and new waste reception facilities; and
- Demolition of the facilities at the existing SENT Landfill infrastructure area.


### **1.3** *SCOPE OF THE EM&A REPORT*

This is the Quarterly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 October to 31 December 2021 for the construction and operation works.

### **1.4** *PROJECT ORGANISATION*

The organisation structure of the Project is presented in *Figure 1.2*.

Figure 1.2 Organisation Chart

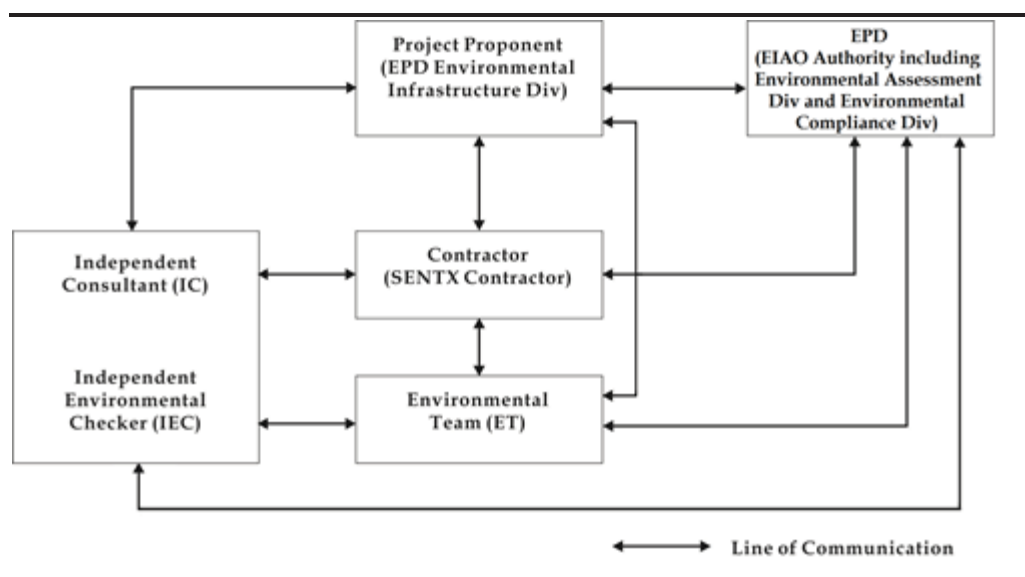

Contact details of the key personnel are summarized in *Table 1.2* below.

Table 1.2 Contact Information of Key Personnel

Party	Position	Name	Telephone
Contractor (Green Valley Landfill Limited)	Project Manager	Gary Barnicott	2706 8827
Environmental Team (ET) (ERM-Hong Kong, Limited)	ET Leader	Frank Wan	2271 3152
Independent Environmental Checker (IEC) (Meinhardt Infrastructure and Environment Limited)	IEC	W.K. Chiu	2858 0738

## 1.5 SUMMARY OF CONSTRUCTION WORKS

The programme of the construction is shown in *Annex A*. As informed by the Contractor, the major works carried out in this reporting period include:

### October 2021

- Follow up on civil provision work detects at Landfill Gas (LFG) Plant, Leachate Treatment Plant (LTP) and infrastructure area;
- Construction of screeding at LTP;
- Permanent equipment installation for sump houses 1, 2 and 3;
- Construction of mechanically stabilised earth (MSE) wall and Cell 4X formation;
- Maintenance and improvement of temporary surface water drainage; and

- Underground utilities and pipes installation at waste reception area.

#### November 2021

- Follow up on civil provision work defects at LFG Plant, LTP, infrastructure area and waste reception area;
- Construction of screeding at LTP;
- Permanent equipment installation for sump houses 1, 2 and 3;
- Maintenance and improvement of temporary surface water drainage;
- Demolition of SENT infrastructure buildings; and
- Liner works at Cell 4X.

#### December 2021

- Follow up on civil provision work defects at LFG Plant, LTP, infrastructure area and waste reception area;
- Construction of MSE wall;
- Site formation for Cell 4X;
- Liner works at Cell 4X; and
- Maintenance and improvement of temporary surface water drainage.

The implementation schedule of the mitigation measures recommended in the Updated EM&A Manual is presented in *Annex B*.

The status for all environmental aspects are presented in *Table 1.3*. The EM&A requirements remained unchanged during the reporting period.

**Table 1.3** *Summary of Status for the Environmental Aspects under the Updated EM&A Manual*

Parameters	Status
<b>Air Quality</b>	
Baseline Monitoring	The results of baseline air quality monitoring were reported in Baseline Monitoring Report and Pre-operation Baseline Monitoring Report and submitted to EPD under EP Condition 3.3
Impact Monitoring	On-going
<b>Noise</b>	
Baseline Monitoring	The results of baseline noise monitoring were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.3
Impact Monitoring	On-going
<b>Water Quality</b>	
Baseline Monitoring	The results of baseline surface water quality monitoring were reported in Baseline Monitoring Report and Pre-operation Baseline Monitoring Report and submitted to EPD under EP Condition 3.3
Impact Monitoring	On-going
<b>Landfill Gas</b>	
Impact Monitoring	On-going
<b>Waste Management</b>	
Waste Monitoring	On-going
<b>Landscape and Visual</b>	
Baseline Monitoring	The results of baseline landscape and visual monitoring were reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.3
Construction Phase Audit	On-going
<b>Site Environmental Audit</b>	
Regular Site Inspection	On-going
Complaint Hotline and Email Channel	On-going
Environmental Log Book	On-going

Taking into account the construction/operation works, impact monitoring of air quality, noise, water quality, landfill gas and waste management were carried out in the reporting period. The impact monitoring schedule of air quality, noise, water quality and landfill gas monitoring are provided in *Annex C*.

The EM&A programme also involved environmental site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation measures recommended in the approved EIA Report and relevant EP submissions. To promote the environmental awareness and enhance the environmental performance of the contractors, environmental trainings and regular environmental management meetings were conducted during the reporting period, which are summarised as below:

- Three environmental management meetings were held with the Contractor, ER, ET, IEC and EPD on 21 October, 26 November and 16

December 2021; and

- Environmental toolbox trainings on the following topics were provided by the Contractor to the workers:
  - Cut Down Construction Dust on 6 October 2021;
  - Waste Water Management on 20 October 2021;
  - Trip Ticket System on 10 November 2021;
  - Illegal Dumping on 23 November 2021;
  - Noise Control Ordinance on 8 December 2021; and
  - Air Pollution Control (NRMM) Regulation on 22 December 2021 .

**1.7 STATUS OF STATUTORY ENVIRONMENTAL COMPLIANCE WITH THE ENVIRONMENTAL PERMIT**

The status of statutory environmental compliance with the EP conditions under the EIAO, submission status under the EP and implementation status of the recommended mitigation measures are presented in *Table 1.4*.

**Table 1.4 Status of Submissions required under the EP and Implementation Status of the recommended Mitigation Measures**

EP Condition	Submission / Implementation Status	Status
2.3	Management Organisation of Main Construction Companies	Submitted and accepted by EPD.
2.4	Setting up of Community Liaison Group	Community Liaison Group was set up.
2.5	Submission of Detailed Landfill Gas Hazard Assessment Report	Submitted, and accepted by EPD on 10 January 2019.
2.6	Submission of Restoration and Ecological Enhancement Plan	Submitted to EPD on 28 June 2019.
2.7	Setting up of Trial Nursery	Trial Nursery works was commenced on 28 August 2019.
2.8	Advance Screen Planting	Advance Screen Planting works were completed on 28 June 2019.
2.9	Provision of Multi-layer Composite Liner System	Under implementation.

**1.8 STATUS OF OTHER STATUTORY ENVIRONMENTAL REQUIREMENTS**

The environmental licenses and permits (including EP, *Water Pollution Control Ordinance* (WPCO) discharge license, registration as a chemical waste producer, and construction noise permit) that are valid in the reporting period are presented in *Table 1.5*. No non-compliance with environmental statutory requirements was identified.

**Table 1.5**      **Status of Statutory Environmental Requirements**

<b>Description</b>	<b>Ref No.</b>	<b>Status</b>
Environmental Permit	EP-308/2008	Granted on 5 August 2008
Variation of Environmental Permit	EP-308/2008/A	Granted on 6 January 2012
	EP-308/2008/B	Granted on 20 January 2017
Further Environmental Permit	FEP-01/308/2008/B	Granted on 16 May 2018
Water Discharge License under WPCO (Permit Holder: Chun Wo)	Licence No.: WT00033525-2019	Validity from 27 March 2019 to 31 March 2024
Water Discharge License under WPCO (Permit Holder: GVL)	Licence No.: WT00036269-2020	Validity from 21 June 2020 to 30 June 2022
Billing Account for Disposal of Construction Waste	Chit Account Number: 5001692	Approved on 28 December 2005
Registration as a Chemical Waste Producer (Permit Holder: Chun Wo)	5213-839-C3507-10	Issued on 23 August 2018
Registration as a Chemical Waste Producer (Permit Holder: REC)	5518-839-R2289-06	Issued on 24 October 2019
Construction Noise Permit (Permit Holder: GVL)	GW-RE0990-21	Validity from 6 October 2021 to 5 April 2022
Construction Noise Permit (Permit Holder: Chun Wo)	GW-RE0564-21	Validity from 7 June 2021 to 6 December 2021
Construction Noise Permit (Permit Holder: Paul Y.)	GW-RE1138-21	Validity from 16 November 2021 to 15 February 2022

The EM&A programme for the Project required environmental monitoring for air quality, noise, water quality and landfill gas as well as environmental site inspections for air quality, noise, water quality, landfill gas, waste management, and landscape and visual impacts. The EM&A requirements and related findings for each component are summarised in the following sections.

## 2.1 AIR QUALITY MONITORING

### 2.1.1 Dust Monitoring

#### *Monitoring Requirements and Equipment*

According to the updated EM&A Manual of the Project, impact air quality monitoring (dust, in term of Total Suspended Particulates (TSP)) was carried out at the two designated monitoring locations (i.e. DM1 and DM2) and four designated locations along the site boundary (i.e. AM1, AM2, AM3 and AM4) during the construction and operation/restoration phase, respectively, at a 6-day interval. During the construction phase, as there are two existing TSP monitoring stations (i.e. TKO-A1 and TKO-A2a) currently operating by the Civil Engineering and Development Department (CEDD) to monitor the 24-hour TSP levels at the proposed dust monitoring stations for the SENTX, it is considered that the CEDD monitoring data can represent the dust condition of the SENTX during the construction phase.

The Action and Limit Levels of the air quality monitoring is provided in *Table 2.1* below.

**Table 2.1** *Action and Limit Levels for 24-hour TSP*

<b>Monitoring Station</b>	<b>Action Level</b>	<b>Limit Level</b>
<b>Construction Phase:</b>		
DM-1 - Site Egress of TKO Area 137 Fill Bank	204 $\mu\text{g m}^{-3}$	260 $\mu\text{g m}^{-3}$
DM-2A -Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank	193 $\mu\text{g m}^{-3}$	260 $\mu\text{g m}^{-3}$
<b>Operation/ Restoration Phase:</b>		
AM1 - SENTX Site Boundary (North)		
AM2 - SENTX Site Boundary (West, near DP3)		
AM3 - SENTX Site Boundary (West, near RC15)	260 $\mu\text{g m}^{-3}$	260 $\mu\text{g m}^{-3}$
AM4 - SENTX Site Boundary (West, near EPD building)		

High volume air samplers (HVSs) in compliance with the specifications listed under Section 3.2.2 of the updated EM&A Manual were used to measure 24-hour TSP levels at the CEDD dust monitoring stations. The HVSs were calibrated upon installation and thereafter at bi-monthly intervals to check the validity and accuracy of the results.



The equipment used in the impact air quality monitoring programme and monitoring locations are summarised in *Table 2.2* and illustrated in *Figure 2.1* respectively.

**Table 2.2** *Dust Monitoring Details*

Monitoring Station	Location	Parameter	Frequency and Duration	Monitoring Dates	Equipment
<b>Construction Phase</b>					
DM1	Site Egress of TKO Area 137 Fill Bank	24-hour TSP	Once every 6 days	3, 11, 15, 21, 27 October 2021	HVS Greasby 105 (S/N: 9795 (ET/EA/003/18))
DM2	Combined Reception and Exit Office (CREO) of TKO Area 137 Fill Bank			2, 8, 14, 20 November 2021	HVS Andersen G1051 (S/N: 1176 (ET/EA/003/05))
<b>Operation/ Restoration Phase</b>					
AM1	SENTX Site Boundary (North)	24-hour TSP	Once every 6 days	25 November 2021	Tisch TE-5170 (S/N: 1190)
AM2	SENTX Site Boundary (West, near DP3)			1, 7, 13, 19, 25, 31 December 2021	Tisch TE-5170 (S/N: 1047)
AM3	SENTX Site Boundary (West, near RC15)				Tisch TE-5170 (S/N: 1258)
AM4	SENTX Site Boundary (West, near EPD building)				Tisch TE-5170 (S/N: 1101)

#### *Monitoring Schedule for the Reporting Period*

The schedule for air quality monitoring during the reporting period is provided in *Annex C*.

#### *Results and Observations*

The 24-hour TSP monitoring results are summarised in *Table 2.3*. The detailed monitoring results and the graphical presentation of the 24-hour TSP monitoring results at each monitoring location are provided in *Annex D1*.

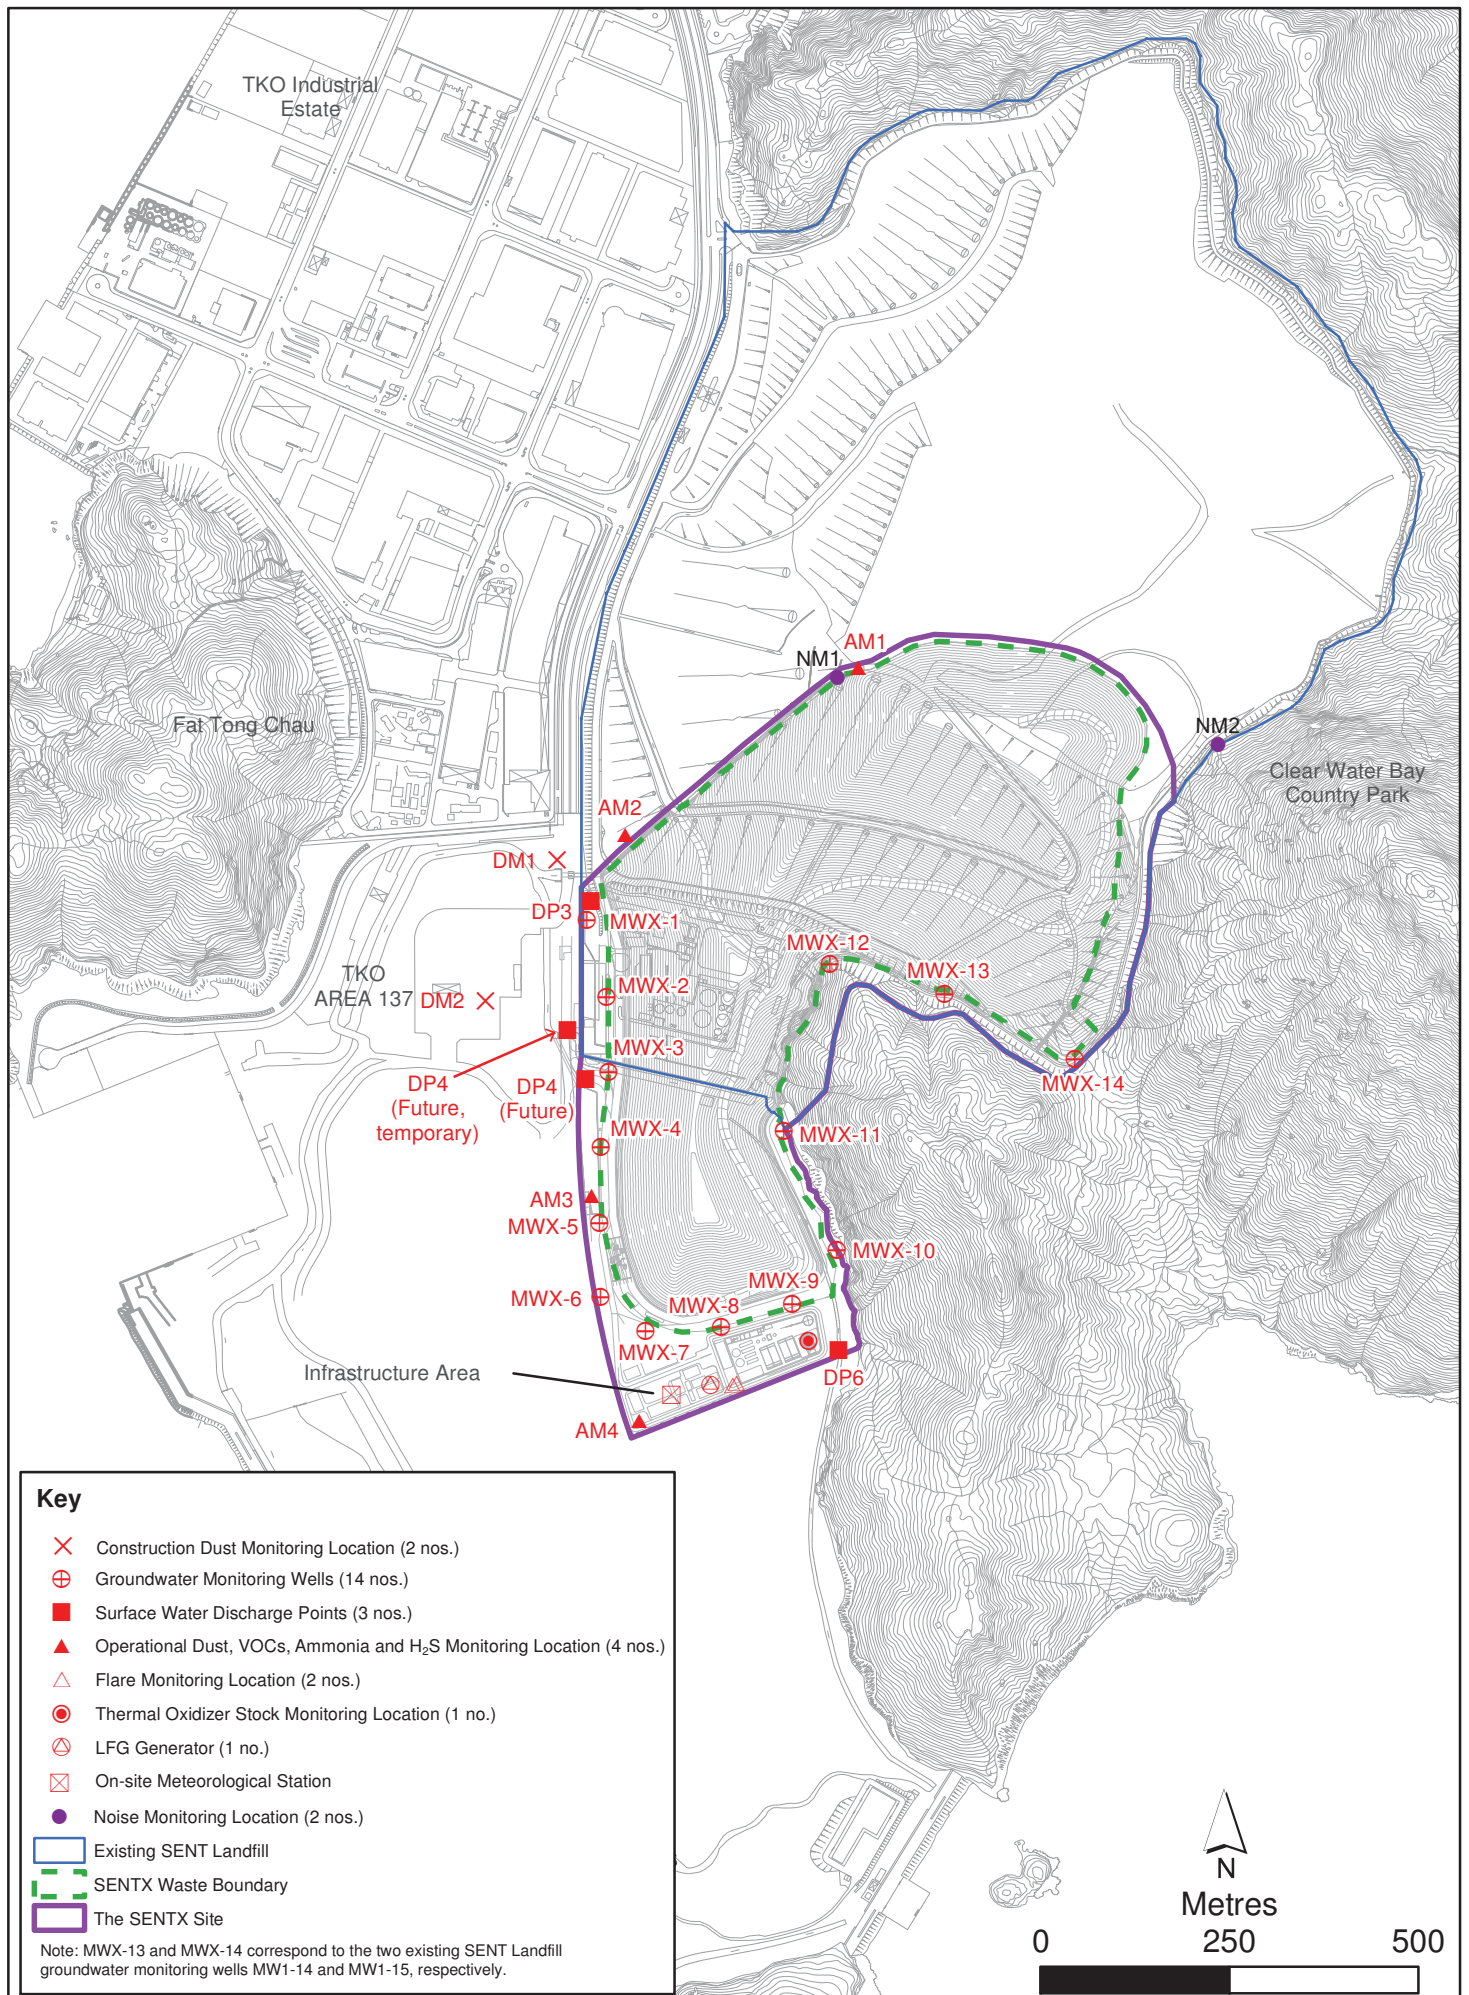


Figure 2.1

Environmental Monitoring Locations

**Table 2.3 Summary of 24-hour TSP Monitoring Results in the Reporting Period**

Month	Monitoring Station	24-hr TSP Concentration ( $\mu\text{g m}^{-3}$ )		Action Level ( $\mu\text{g/m}^3$ )	Limit Level ( $\mu\text{g/m}^3$ )
		Average	Range		
<b>Construction Phase</b>					
October 2021	DM-1	98	92 - 112	204	260
	DM-2	92	86 - 104	193	260
November 2021	DM-1	101	94 - 109	204	260
	DM-2	91	86 - 197	193	260
<b>Operation/ Restoration Phase</b>					
November 2021	AM1	100	-	260	260
	AM2	154	-	260	260
	AM3	158	-	260	260
	AM4	235	-	260	260
December 2021	AM1	112	57 - 173	260	260
	AM2	129	100 - 156	260	260
	AM3	182	128 - 258	260	260
	AM4	168	102 - 282	260	260

The major dust sources in the reporting period included fugitive dust emission from exposed area in SENTX, as well as nearby operations of the SENT landfill and the TKO Area 137 Fill Bank.

Action and Limit Levels exceedance was recorded for TSP monitoring in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex D2* were undertaken. Investigation of the Action and Limit Levels exceedance was conducted and the investigation report is presented in *Annex D6*.

Based on the investigation conducted for the monitoring event with potential Action and Limit Levels exceedance with the Contractor and the IEC, the TSP exceedance at AM4 on 13 December 2021 was considered non Project-related. The Contractor was reminded to implement all relevant mitigation measures for the construction and operation works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor’s compliance of the environmental requirements.

#### *Meteorological Data*

Meteorological data obtained from the SENTX on-site meteorological monitoring station was used for the dust monitoring and is shown in *Annex D3*. It is considered that meteorological data obtained at the on-site meteorological monitoring station is representative of the Project area and could be used for the construction/operation phase dust monitoring programme for the Project.

## 2.1.2

### *Odour Monitoring*

#### *Monitoring Requirements*

According to the updated EM&A Manual of the Project, odour patrol was carried out along the site boundary during the operation/ restoration phase. During the first month of operation, daily odour patrol (3 times per day) was conducted jointly by the ET and the IEC. The odour intensity detected was based on that determined by the IEC. In addition, an independent party (ALS Technichem (HK) Pty Ltd.) was appointed to undertake odour patrol together with the ET and IEC three times per week. During these patrols, the odour intensity detected was based on that determined by the independent third party.


The Action and Limit Levels for odour patrol is provided in *Table 2.4* below.

**Table 2.4** *Action and Limit Levels for Odour Patrol*

<b>Parameter</b>	<b>Action Level</b>	<b>Limit Level</b>
Perceived odour intensity and odour complaints	<ul style="list-style-type: none"> <li>• Odour intensity <math>\geq</math> Class 2 recorded; or</li> <li>• One documented complaint received</li> </ul>	<ul style="list-style-type: none"> <li>• Odour intensity <math>\geq</math> Class 3 recorded on 2 consecutive patrol <sup>(a)</sup> <sup>(b)</sup></li> </ul>
<b>Notes:</b>		
(a) i.e. either Class 3-strong or Class 4-extreme odour intensity.		
(b) The exceedances of the odour intensity do not need to be recorded at the same location.		

Odour patrol was conducted by trained personnel / competent persons with a specific sensitivity to a reference odour (i.e. on reference materials n-butanol with the concentration of 50ppm in nitrogen (v/v)) in compliance with Section 3.7.2 of the updated EM&A Manual patrolling and sniffing along the SENTX Site boundary to detect any odour.

The odour monitoring programme and patrol route are summarised in *Table 2.5* and illustrated in *Figure 2.2* respectively.

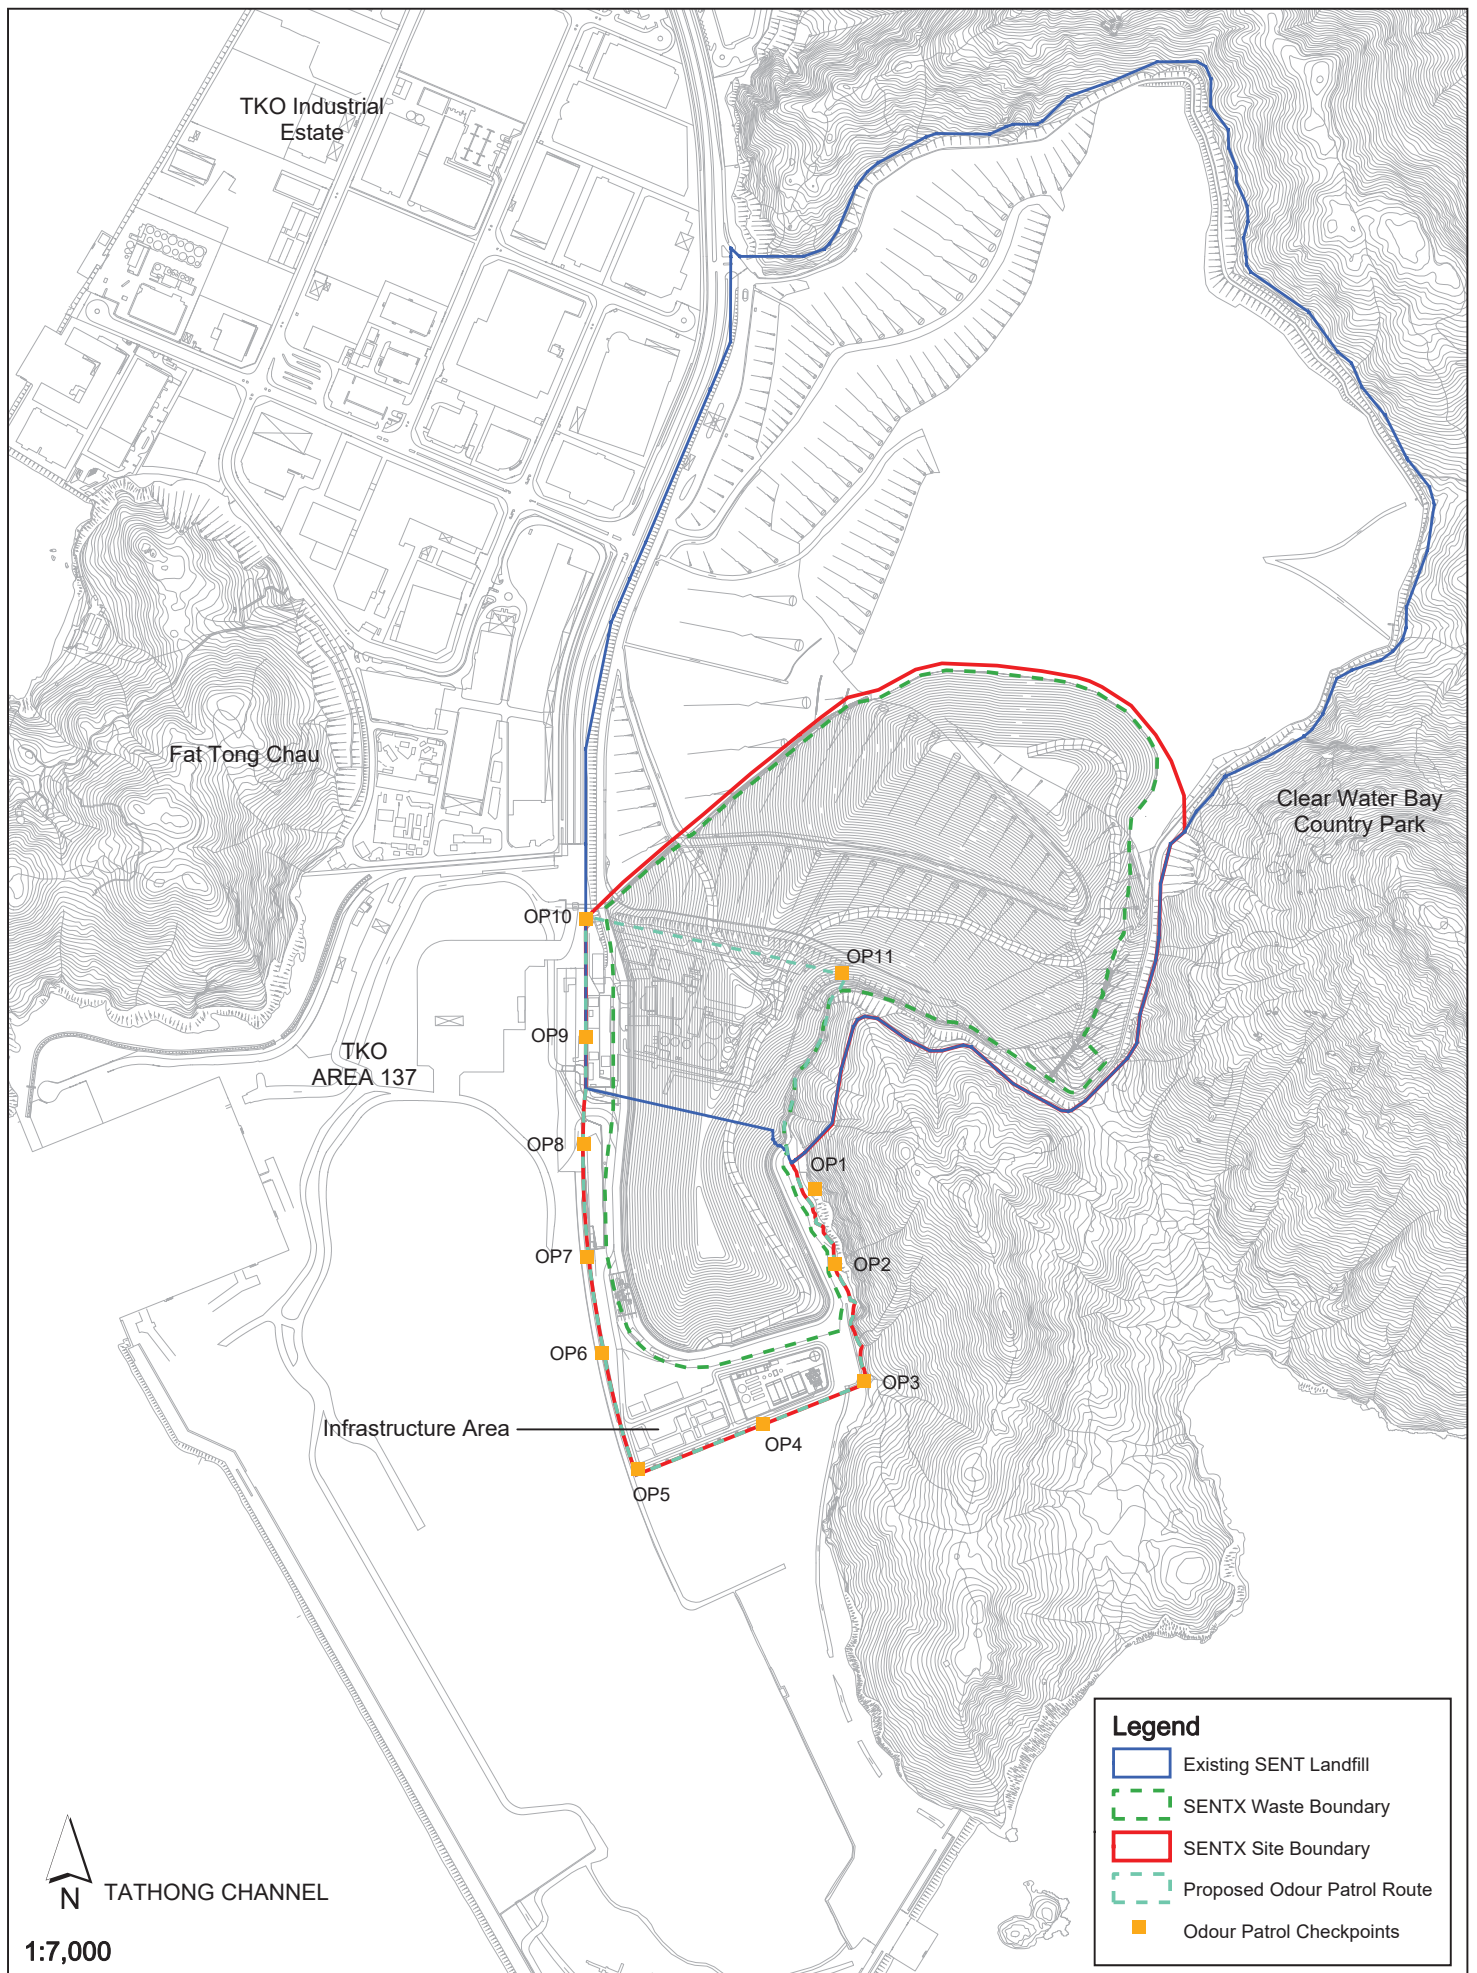

1:7,000

Figure 2.2

Odour Patrol Route for Operation/ Restoration Phase Odour Monitoring

**Table 2.5 Odour Monitoring Details**

Patrol Locations	Parameters	Patrol Frequency <sup>(a)</sup>	Monitoring Dates and Time
Patrol along the SENTX Site Boundary (Checkpoints OP1 - OP11 <sup>(d)</sup> )	Odour Intensity (see Table 2.6)	<u>Period 1 - First month of operation</u>	<u>Conducted by ET &amp; IEC:</u> 21 - 30 Nov 2021, 1 - 31 Dec 2021 (10:30 - 12:00, 14:30 - 16:00, 18:00 - 19:30)
		Three times per week on different days conducted by an independent third party together with the ET and IEC <sup>(b)</sup>	<u>Conducted by an independent third party, ET &amp; IEC:</u> 22 Nov 2021 (14:30 - 16:00), 24 Nov 2021 (10:00 - 12:00), 26 Nov 2021 (14:30 - 16:00), 29 Nov 2021 (14:30 - 16:00), 1 Dec 2021 (14:30 - 16:00), 3 Dec 2021 (10:00 - 12:00), 6 Dec 2021 (14:30 - 16:00), 8 Dec 2021 (10:00 - 12:00), 10 Dec 2021 (10:00 - 12:00), 13 Dec 2021 (10:00 - 12:00), 15 Dec 2021 (10:00 - 12:00), 17 Dec 2021 (14:30 - 16:00), 20 Dec 2021 (10:00 - 12:00), 22 Dec 2021 (14:30 - 16:00), 24 Dec 2021 (14:30 - 16:00), 28 Dec 2021 (14:30 - 16:00), 29 Dec 2021 (10:00 - 12:00), 31 Dec 2021 (14:30 - 16:00)
		<u>Period 2 - Three months following period 1 <sup>(c)</sup></u>	
		Weekly conducted by the ET and the IEC	
		Once every two weeks conducted by an independent third party together with the ET and IEC <sup>(b)</sup>	
		<u>Period 3 - Throughout operation following period 2 <sup>(c)</sup></u>	
Monthly conducted by the ET and the IEC			
Quarterly conducted by an independent third party together with the ET and IEC <sup>(b)</sup>			

**Notes:**

- (a) Reduction of monitoring frequency will be subject to the monitoring results to demonstrate environmentally acceptable performance.
- (b) Patrol shall be scheduled so that they are carried out together with the patrols to be carried out jointly by the ET and the IEC.
- (c) Commencement of each period will be justified by the ET Leader and verified by the IEC and will be subject to agreement with the EPD (EIAO Authority) and Project Proponent.
- (d) The revised odour patrol route with the addition of checkpoint OP11 was applied from 10 December 2021.

**Table 2.6 Odour Intensity Level**

Class	Odour Intensity	Description
0	Not Detected	No odour perceived or an odour so weak that it cannot be easily characterised or described.
1	Slight	Identified odour, slight
2	Moderate	Identified odour, moderate
3	Strong	Identified odour, strong
4	Extreme	Severe odour

### *Monitoring Schedule for the Reporting Month*

The schedule for odour patrol during the reporting period is provided in *Annex C*.

### *Results and Observations*

The odour monitoring results are summarised and provided in *Table 2.7* and *Annex D4*, respectively.

**Table 2.7** *Summary of Odour Monitoring Results in the Reporting Period*

<b>Odour Checkpoints</b>	<b>Odour Intensity Class (Range)</b>	<b>Action Level</b>	<b>Limit Level</b>
OP1	0 – 1	Odour intensity $\geq$ Class 2 recorded	Odour intensity $\geq$ Class 3 recorded on 2 consecutive patrol
OP2	0 – 1		
OP3	0 – 1		
OP4	0 – 1		
OP5	0 – 1		
OP6	0 – 1		
OP7	0 – 1		
OP8	0 – 1		
OP9	0 – 1		
OP10	0		
OP11	0 – 1		

The potential odour sources in the reporting period included the construction works, operation of leachate treatment plant, generator, slurry truck, excavator, vehicles and vegetation at SENTX, as well as nearby operations of the Town Gas Plant.

All the odour monitoring results were below the Action and Limit Levels in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex D2*.

### **2.1.3** *Thermal Oxidiser, Landfill Gas Flare and Landfill Gas Generator Stack Emission Monitoring*

#### *Monitoring Requirements and Equipment*

According to the updated EM&A Manual of the Project, the performance of the thermal oxidiser, landfill gas flare and landfill gas generator was monitored when they are in operation. Gas samples were collected from the stack of the thermal oxidizer, landfill gas flare and landfill gas generator for laboratory analysis for NO<sub>2</sub>, CO, SO<sub>2</sub>, Benzene and Vinyl chloride and in-situ analysis for exhaust gas velocity at monthly interval. The operating conditions of the thermal oxidiser, landfill gas flare and landfill gas generator were also monitored continuously.

The Limit Levels for stack emission of the thermal oxidiser, landfill gas flare and landfill gas generator are provided in *Tables 2.8 – 2.10* below.

**Table 2.8** *Limit Levels for Stack Emission of the Thermal Oxidiser*

Parameters	Limit Level
NO <sub>2</sub>	1.58 gs <sup>-1</sup>
CO	0.53 gs <sup>-1</sup>
SO <sub>2</sub>	0.07 gs <sup>-1</sup>
Benzene	3.01 × 10 <sup>-2</sup> gs <sup>-1</sup>
Vinyl chloride	2.23 × 10 <sup>-3</sup> gs <sup>-1</sup>
Gas combustion temperature	850°C (minimum)
Exhaust gas exit temperature	443K (minimum) <sup>(a)</sup>
Exhaust gas velocity	7.5 ms <sup>-1</sup> (minimum) <sup>(a)</sup>

**Note:**  
<sup>(a)</sup> Level under full load condition.

**Table 2.9** *Limit Levels for Stack Emission of the Landfill Gas Flare*

Parameters	Limit Level
NO <sub>2</sub>	0.97 gs <sup>-1</sup>
CO	2.43 gs <sup>-1</sup>
SO <sub>2</sub>	0.22 gs <sup>-1</sup>
Benzene	4.14 × 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl Chloride	2.60 × 10 <sup>-4</sup> gs <sup>-1</sup>
Gas combustion temperature	815°C (minimum)
Exhaust gas exit temperature	923 K (minimum) <sup>(a)</sup>
Exhaust gas velocity	9.0 m s <sup>-1</sup> (minimum) <sup>(a)</sup>

**Note:**  
<sup>(a)</sup> Level under full load condition.

**Table 2.10** *Limit Levels for Stack Emission of the Landfill Gas Generator*

Parameters	Limit Level
NO <sub>2</sub>	1.91 gs <sup>-1</sup>
CO	2.48 gs <sup>-1</sup>
SO <sub>2</sub>	0.528 gs <sup>-1</sup>
Benzene	2.47 × 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl chloride	1.88 × 10 <sup>-5</sup> gs <sup>-1</sup>
Gas combustion temperature	450°C (minimum)
Exhaust gas exit temperature	723K (minimum) <sup>(a)</sup>
Exhaust gas velocity	30.0 ms <sup>-1</sup> (minimum) <sup>(a)</sup>

**Note:**  
<sup>(a)</sup> Level under full load condition.

Gas samples were collected from the centroid of the stack with stainless steel sampling probe, into inert sample containers (i.e. Canister and Tedlar Bag) and transferred to ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066) laboratory within 24 hours of collection for direct analysis on a gas chromatography within 48 hours after collection. The flue gas velocity of the gas stream at the exhaust of thermal oxidize was determined by S-Pitot tube during the emission sampling.



The stack emission monitoring programme and monitoring locations are summarised in *Table 2.11* and illustrated in *Figure 2.1*, respectively.

**Table 2.11** *Thermal Oxidiser, Landfill Gas Flare and Landfill Gas Generator Stack Emission Monitoring Details*

Monitoring Location	Parameter	Frequency	Monitoring Date
Stack of Thermal Oxidiser	Laboratory analysis for	Monthly for the first 12 months of operation and thereafter at quarterly intervals	20 Dec 2021
	• NO <sub>2</sub>		
	• CO		
	• SO <sub>2</sub>		
Stack of Landfill Gas Flare	In-situ analysis for	Continuously	1 – 31 Dec 2021
	• Exhaust gas velocity		
	• Gas combustion temperature		
	• Exhaust temperature		
Stack of Landfill Gas Generator	Laboratory analysis for	Monthly for the first 12 months of operation and thereafter at quarterly intervals	17 Dec 2021
	• NO <sub>2</sub>		
	• CO		
	• SO <sub>2</sub>		
Stack of Landfill Gas Generator	In-situ analysis for	Continuously	1 – 31 Dec 2021
	• Exhaust gas velocity		
	• Exhaust temperature		
	• Exhaust gas velocity <sup>(a)</sup>		

**Note:**

(a) The exhaust gas velocity will be calculated based on the cross-section area of the stack and continuous monitored gas flow and combustion temperature data.

### Monitoring Schedule for the Reporting Month

The schedule for thermal oxidizer, landfill gas flare and landfill gas generator stack emission monitoring during the reporting period is provided in *Annex C*.

### Results and Observations

The thermal oxidizer, landfill gas flare and landfill gas generator stack emission monitoring results and detailed continuous monitoring results are summarised in *Tables 2.12 - 2.14* and provided in *Annex D5*, respectively.

**Table 2.12** *Summary of Thermal Oxidiser Stack Emission Monitoring in the Reporting Period*

Parameters	Monitoring Results (Range in Bracket)	Limit Level
NO <sub>2</sub>	0.38 gs <sup>-1</sup>	1.58 gs <sup>-1</sup>
CO	<0.02 gs <sup>-1</sup>	0.53 gs <sup>-1</sup>
SO <sub>2</sub>	<0.01 gs <sup>-1</sup>	0.07 gs <sup>-1</sup>
Benzene	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>	3.01 x 10 <sup>-2</sup> gs <sup>-1</sup>
Vinyl chloride	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>	2.23 x 10 <sup>-3</sup> gs <sup>-1</sup>
Gas combustion temperature	943°C (932°C - 984°C)	850°C (minimum)
Exhaust gas exit temperature	1,237K (1,219K - 1,316K)	443K (minimum) <sup>(a)</sup>
Exhaust gas velocity	15.3 <sup>(b)</sup>	7.5 ms <sup>-1</sup> (minimum) <sup>(a)</sup>

**Note:**

(a) Level under full load condition.

(b) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring. The limit level was not applicable as the stack was not operated under full load condition.

**Table 2.13** *Summary of Landfill Gas Flare Stack Emission Monitoring in the Reporting Period*

Parameters	Monitoring Results (Range in Bracket)	Limit Level
NO <sub>2</sub>	<0.02 gs <sup>-1</sup>	0.97 gs <sup>-1</sup>
CO	2.81 gs <sup>-1</sup>	2.43 gs <sup>-1</sup>
SO <sub>2</sub>	0.11 gs <sup>-1</sup>	0.22 gs <sup>-1</sup>
Benzene	9.9 x 10 <sup>-5</sup> gs <sup>-1</sup>	4.14 x 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl chloride	<1.4 x 10 <sup>-5</sup> gs <sup>-1</sup>	2.60 x 10 <sup>-4</sup> gs <sup>-1</sup>
Gas combustion temperature	Flare 1: 864°C (820°C - 935°C) Flare 2: 853°C (820°C - 894°C)	815°C (minimum)
Exhaust gas exit temperature	Flare 1: 1,059K (1,025K - 1,115K) Flare 2: 1,027K (944K - 1,097K)	923 K (minimum) <sup>(a)</sup>
Exhaust gas velocity	9.1 <sup>(b)</sup>	9.0 m s <sup>-1</sup> (minimum) <sup>(a)</sup>

**Note:**

(a) Level under full load condition.

(b) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring. The limit level was not applicable as the stack was not operated under full load condition.

**Table 2.14** *Summary of Landfill Gas Generator Stack Emission Monitoring in the Reporting Period*

Parameters	Monitoring Results (Range in Bracket)	Limit Level
NO <sub>2</sub>	0.007 gs <sup>-1</sup>	1.91 gs <sup>-1</sup>
CO	0.046 gs <sup>-1</sup>	2.48 gs <sup>-1</sup>
SO <sub>2</sub>	0.074 gs <sup>-1</sup>	0.528 gs <sup>-1</sup>
Benzene	4 x 10 <sup>-6</sup> gs <sup>-1</sup>	2.47 x 10 <sup>-4</sup> gs <sup>-1</sup>
Vinyl chloride	<1.2 x 10 <sup>-6</sup> gs <sup>-1</sup>	1.88 x 10 <sup>-5</sup> gs <sup>-1</sup>
Exhaust gas exit temperature	838K (748K - 847K)	723K (minimum) (a)
Exhaust gas velocity	17.6 (b)	30.0 ms <sup>-1</sup> (minimum) (a)

**Note:**

(a) Level under full load condition.

(b) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring. The limit level was not applicable as the stack was not operated under full load condition.

Limit Levels exceedance was recorded for landfill gas flare stack emission (CO) in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex D2* were undertaken. Investigation of the Limit Levels exceedance was conducted and the investigation report is presented in *Annex D6*.

Based on the investigation conducted for the monitoring event with potential Limit Levels exceedance with the Contractor and the IEC, the landfill gas flare stack emission (CO) exceedance on 17 December 2021 was found to be Project-related. The Contractor was reminded to implement all relevant mitigation measures for the construction and operation works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor's compliance of the environmental requirements.

## 2.2 NOISE MONITORING

### 2.2.1 Monitoring Requirements and Equipment

According to the updated EM&A Manual of the Project, impact noise monitoring was conducted weekly at the monitoring location (i.e. NM1) to obtain one set of 30 minutes measurement between 07:00 and 19:00 hours on normal weekdays.

The Action and Limit Levels for construction and operational noise of the Project are provided in *Table 2.15* below.

**Table 2.15 Action and Limit Levels for Construction/Operational Noise**

<b>Time Period</b>	<b>Action Level (a)</b>	<b>Limit Level (b)</b>
<b>Construction Noise:</b>		
07:00 – 19:00 hrs on normal weekdays	When one documented complaint is received from any one of the noise sensitive receivers (NSRs) or 75 dB(A) recorded at the monitoring station	75 dB(A) at NSRs
<b>Operational Noise:</b>		
07:00 – 19:00 hrs on all days	When one documented complaint is received from any one of the noise sensitive receivers (NSRs)	65 dB(A) at NSRs (c)
19:00 – 23:00 hrs on all days	or 75 dB(A) recorded at the monitoring station	65 dB(A) at NSRs (c)
23:00 – 07:00 hrs on all days		55 dB(A) at NSRs (c)
<b>Notes:</b>		
(a)	75dB(A) along and at about 100m from the SENTX site boundary was set as the Action Level.	
(b)	Limits specified in the GW-TM and IND-TM for construction and operational noise, respectively.	
(c)	Limit Level only apply to operational noise without road traffic and construction activities noise.	

Noise monitoring was performed by ALS Technichem (HK) Pty Ltd (HOKLAS Registration No. 066) using a sound level meter placed at the designated monitoring station NM1 (see *Figure 2.1*) in accordance with the requirements stipulated in the updated EM&A Manual. Acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. Details of the deployed equipment are provided in *Table 2.16*.

**Table 2.16 Noise Monitoring Details**

Monitoring Station <sup>(1)</sup>	Location	Parameter	Frequency and Duration	Monitoring Dates	Equipment
NM1	SENTX Site Boundary (North)	L <sub>eq</sub> (30 min) measurement between 07:00 and 19:00 hours on normal weekdays (Monday to Saturday)	Once per week for 30 mins during the construction and operation period of the Project	7, 15, 21, 28 October 2021 4, 11, 18, 25 November 2021 2, 9, 14, 22, 28 December 2021	Sound Level Meter: B&K 2238 (S/N: 2285721) Rion NL-31 (S/N: 00410221) B&K 2238 (S/N: 2285722) Rion NL-52 (S/N: 00921191) Acoustic Calibrator: Rion NC-73 (S/N: 10655561) Rion NC-74 (S/N: 34657230) Rion NC-75 (S/N: 34680623)

**2.2.2 Monitoring Schedule for the Reporting Period**

The schedule for noise monitoring during the reporting period is provided in Annex C.

**2.2.3 Results and Observations**

A total of 13 impact noise monitoring events were scheduled during the reporting period. However, noise monitoring on 15 October 2021 was cancelled due to adverse weather. The noise monitoring results are summarised in Table 2.17 and graphically presented in Annex E1.

**Table 2.17 Summary of Construction/Operation Noise Monitoring Results in the Reporting Period**

Month	Monitoring Station	Measured Noise Level L <sub>eq</sub> (30 min), dB(A)		
		Average	Range	Action and Limit Level
October 2021	NM1	53.5	49.7 – 56.4	75
November 2021	NM1	51.4	49.0 – 53.4	75
December 2021	NM1	49.9	47.0 – 51.1	75

Major noise sources identified during the noise monitoring included noise from operations of the existing SENT landfill and the TKO Area 137 Fill Bank, aircrafts and insects.

No exceedance of the Action and Limit Levels for construction/operation noise monitoring was recorded in the reporting period. No further mitigation measure was required in accordance with the Event and Action Plan presented in *Annex E2*.

## 2.3 WATER QUALITY MONITORING

### 2.3.1 Surface Water Quality Monitoring

#### *Monitoring Requirements and Equipment*

According to the updated EM&A Manual of the Project, impact surface water quality monitoring were carried out at the three designated surface water discharge points (i.e. DP3, DP4 and DP6) at weekly and monthly intervals during construction phase and operation/ restoration phase, respectively to ensure that the SENTX will not cause adverse water quality impact. Temporary relocation of surface water discharge point DP4 to DP4 (Future, temporary) as an interim arrangement due to site constraints and construction sequence was approved by EPD on 14 May 2019. Impact surface water quality monitoring was carried out at DP4 (Future, temporary) (i.e. DP4T) from the monitoring event on 16 May 2019. In addition, suspension of impact surface water quality monitoring at DP3 was approved under the Baseline Monitoring Report by EPD on 24 July 2019 until the actual commencement of construction works affecting DP3 in 2022.

Dissolved Oxygen (DO) and pH value were measured *in situ* whereas the level of suspended solids (SS) were determined by ALS Technichem (HK) Pty Ltd (HOKLAS Registration No. 066).

The Action and Limit Levels of the surface water quality impact monitoring are provided in *Table 2.18*.

**Table 2.18** *Action and Limit Levels for Surface Water Quality*

Parameters	Action Level	Limit Level
	<b>DP4 &amp; DP6</b>	
<b>Construction Phase:</b>		
DO	< 5.80 mg/L	< 5.42 mg/L
SS	> 11.7 mg/L	> 12.7 mg/L
pH	> 8.39	> 8.40
<b>Operation/ Restoration Phase:</b>		
Ammoniacal-nitrogen		> 7.1 mg/L
COD		> 30 mg/L
SS		> 20 mg/L

The locations of the monitoring stations for the Project are shown in *Figure 2.1*. All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the surface water quality monitoring programme.

Calibration for a DO meter was carried out before measurement according to the instruction manual of the equipment model. Details of the equipment used in the impact surface water quality monitoring works are provided in *Table 2.19*.

**Table 2.19** *Impact Surface Water Quality Monitoring Details*

Monitoring Station	Location	Frequency	Monitoring Dates	Parameter	Equipment	
<b>Construction Phase:</b>						
DP4 (Future, temporary)	Surface water discharge point DP4	Weekly	7, 15, 21, 28 October 2021 4, 11, 18 November 2021	•pH •DO •SS	YSI Professional DSS (S/N: 15H103928)	
DP6	Surface water discharge point DP6					
<b>Operation/Restoration Phase:</b>						
DP4 (Future, temporary)	Surface water discharge point DP4	Monthly	25 November 2021, 28 December 2021	<ul style="list-style-type: none"> <li>• pH</li> <li>• Electrical conductivity (EC)</li> <li>• DO</li> <li>• SS</li> <li>• COD</li> <li>• BOD<sub>5</sub></li> <li>• TOC</li> <li>• Ammoniacal-nitrogen</li> <li>• Nitrate-nitrogen</li> <li>• Nitrite-nitrogen</li> <li>• TKN</li> <li>• TN</li> <li>• Phosphate</li> <li>• Sulphate</li> <li>• Sulphide</li> <li>• Carbonate</li> <li>• Oil &amp; Grease</li> </ul>	<ul style="list-style-type: none"> <li>• Bicarbonate Chloride</li> <li>• Sodium</li> <li>• Potassium</li> <li>• Calcium</li> <li>• Magnesium</li> <li>• Nickel</li> <li>• Manganese</li> <li>• Chromium</li> <li>• Cadmium</li> <li>• Copper</li> <li>• Lead</li> <li>• Iron</li> <li>• Zinc</li> <li>• Mercury</li> <li>• Boron</li> </ul>	YSI Professional DSS (S/N: 15H103928)
DP6	Surface water discharge point DP6				YSI Professional DSS (S/N: 17B102764)	

Notes:

- (a) DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.
- (b) Impact surface water quality monitoring at DP3 was suspended from the monitoring event on 25 July 2019 until the actual commencement of construction works affecting DP3 in 2021.

#### *Monitoring Schedule for the Reporting Period*

The schedule for surface water quality monitoring during the reporting period is provided in *Annex C*.

## Results and Observations

A total of 9 monitoring events for impact surface water quality monitoring were scheduled at all designated monitoring stations during the reporting period. However, sampling could not be carried out at the monitoring events below due to insufficient flow:

- October 2021 at all monitoring locations;
- 4 November 2021 at all monitoring locations;
- 18 November 2021 at all monitoring locations;
- 25 November 2021 at all monitoring locations; and
- 28 December 2021 at all monitoring locations.

Impact surface water quality monitoring results and graphical presentations are provided in *Annex F1*.

All the surface water monitoring results were below the Action and Limit Levels in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex F2*.

### 2.3.2 Leachate Monitoring

#### *Monitoring Requirements and Equipment*

According to the updated EM&A Manual, continuous monitoring of leachate level and daily monitoring of effluent quality were carried out during the operation/ restoration phase.

Temperature, pH and volume of the effluent discharged from the leachate treatment plant were measured in-situ whereas the parameters as listed in *Table 2.21* were determined by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066).

The Limit Levels of the leachate monitoring are provided in *Table 2.20*.

**Table 2.20** *Limit Levels for Leachate Levels and Effluent Quality*

Parameters	Limit Level
<b>Leachate Levels</b>	
Leachate levels above the basal liner	1 m above the primary liner of the leachate containment system
<b>Effluent Quality</b>	
Temperature	> 43 °C
pH Value	6 - 10
Volume Discharged	>1,500 m <sup>3</sup>
Suspended Solids (SS)	> 800 mg/L
Ammoniacal-nitrogen	> 100 mg/L
Nitrite-nitrogen	> 100 mg/L



Parameters	Limit Level
Phosphate	> 25 mg/L
Sulphate	> 900 mg/L
Nitrate-nitrogen	> 100 mg/L
Biochemical Oxygen Demand (BOD)	> 800 mg/L
Chemical Oxygen Demand (COD)	> 2,000 mg/L
Oil & Grease	> 20 mg/L
Boron	> 7,000 µg/L
Iron	> 7.5 mg/L
Cadmium	> 1 µg/L
Chromium	> 400 µg/L
Copper	> 1,000 µg/L
Nickel	> 800 µg/L
Zinc	> 800 µg/L

All *in situ* monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or other international accreditation scheme before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the leachate quality monitoring programme. Details of the equipment used are provided in *Table 2.21*.

**Table 2.21 Leachate Levels and Effluent Quality Monitoring Details**

Location	Frequency	Parameter	Monitoring Dates	Equipment
Leachate levels above the basal liner	Continuous	Leachate Levels	21 - 30 November 2021, 1 - 31 December 2021	Pairs of pressure transducers
Effluent discharged from LTP	Daily for the first 3 months upon full operation of the LTP at wet season (Apr to Sep) and dry season (Oct to Mar), respectively and reduce to monthly thereafter subject to the monitoring results of the first 3 months for each season and agreement with the EIAO Authority, IEC and IC. <sup>(a)</sup>	<i>On-site Measurements:</i> <ul style="list-style-type: none"> <li>• Volume</li> <li>• pH</li> <li>• Temperature</li> </ul> <i>Laboratory analysis:</i> <ul style="list-style-type: none"> <li>• Suspended Solids</li> <li>• COD</li> <li>• BOD<sub>5</sub></li> <li>• TOC</li> <li>• Ammoniacal-nitrogen</li> <li>• Nitrate-nitrogen</li> <li>• Nitrite-nitrogen</li> <li>• Total Nitrogen</li> <li>• Sulphate</li> <li>• Phosphate</li> <li>• Oil &amp; Grease</li> <li>• Alkalinity</li> <li>• Chloride</li> <li>• Calcium</li> <li>• Potassium</li> <li>• Magnesium</li> <li>• Iron</li> <li>• Zinc</li> <li>• Copper</li> <li>• Chromium</li> <li>• Nickel</li> <li>• Cadmium</li> <li>• Boron</li> </ul>	21 - 30 November 2021, 1 - 31 December 2021	Lutron WA-2017SD (S/N: T.016811)

Note:

(a) Reduction of monitoring frequency will be subject to the monitoring results to demonstrate environmentally acceptable performance.

*Monitoring Schedule for the Reporting Month*

The schedule for leachate monitoring during the reporting period is provided in *Annex C*.

*Results and Observations*

The leachate levels and effluent quality monitoring results are summarised in *Table 2.22* and *Table 2.23*, respectively. The detailed monitoring results are provided in *Annex F3* and *Annex F4*, respectively.

**Table 2.22 Summary of Leachate Levels in the Reporting Period**

Month	Monitoring Location	Average Leachate Head Levels (cm) (Range in Bracket)	Limit Level (cm)
<b>Pump Station No. 1X (Cell 1X)</b>			
November 2021	Meter No. X-1	61 (44 - 79)	> 178
	Meter No. X-2	81 (64 - 99)	
	<b>Average</b>	71 (54 - 89)	
December 2021	Meter No. X-1	65 (44 - 111)	
	Meter No. X-2	78 (10 - 111)	
	<b>Average</b>	71 (48 - 101)	
<b>Pump Station No. 2X (Cell 2X)</b>			
December 2021	Meter No. X-1	81 (70 - 88)	> 180
	Meter No. X-2	82 (73 - 88)	
	<b>Average</b>	81 (72 - 87)	
<b>Pump Station No. 3X (Cell 3X)</b>			
December 2021	Meter No. X-1	89 (79 - 99)	> 175
	Meter No. X-2	89 (79 - 99)	
	<b>Average</b>	89 (79 - 89)	

**Table 2.23 Summary of Effluent Quality Monitoring Results in the Reporting Period**

Month	Parameters	Average Monitoring Results (Range in Bracket)	Limit Level
<b>Effluent Discharged from LTP</b>			
November 2021	Temperature	25.0°C (18.6°C - 28.9°C)	> 43 °C
	pH Value	8.4 (8.3 - 8.5)	6 - 10
	Volume Discharged	981m <sup>3</sup> (301m <sup>3</sup> - 1,462m <sup>3</sup> )	>1,500 m <sup>3</sup>
	Suspended Solids (SS)	27.0mg/L (20.4mg/L - 35.2mg/L)	> 800 mg/L
	Ammoniacal-nitrogen	0.40mg/L (0.28mg/L - 0.84mg/L)	> 100 mg/L
	Nitrite-nitrogen	0.20mg/L (0.04mg/L - 0.63mg/L)	> 100 mg/L
	Phosphate	9.7mg/L (9.2mg/L - 10.3mg/L)	> 25 mg/L
	Sulphate	64mg/L (58mg/L - 70mg/L)	> 900 mg/L
	Nitrate-nitrogen	60.8mg/L (46.4mg/L - 69.6mg/L)	> 100 mg/L
	BOD	10mg/L (6mg/L - 14mg/L)	> 800 mg/L
	COD	1,018mg/L (888mg/L - 1,620mg/L)	> 2,000 mg/L
	Oil & Grease	<5mg/L (<5mg/L - <5mg/L)	> 20 mg/L
	Boron	5,246µg/L (4,900µg/L - 5,500µg/L)	> 7,000 µg/L
	Iron	1.40mg/L (1.28mg/L - 1.56mg/L)	> 7.5 mg/L
	Cadmium	<1.0µg/L (<1.0µg/L - <1.0µg/L)	> 1 µg/L
	Chromium	126µg/L (120µg/L - 134µg/L)	> 400 µg/L
	Copper	11µg/L (11µg/L - 11µg/L)	> 1,000 µg/L
Nickel	114µg/L (110µg/L - 117µg/L)	> 800 µg/L	
Zinc	65µg/L (60µg/L - 70µg/L)	> 800 µg/L	
December 2021	Temperature	25.7°C (20.0°C - 30.6°C)	> 43 °C
	pH Value	8.4 (8.3 - 8.5)	6 - 10
	Volume Discharged	1,025m <sup>3</sup> (473m <sup>3</sup> - 1,435m <sup>3</sup> )	>1,500 m <sup>3</sup>
	Suspended Solids (SS)	20.0mg/L (10.1mg/L - 33.8mg/L)	> 800 mg/L

Month	Parameters	Average Monitoring Results (Range in Bracket)	Limit Level
	Ammoniacal-nitrogen	0.34mg/L (0.15mg/L - 0.75mg/L)	> 100 mg/L
	Nitrite-nitrogen	0.24mg/L (0.14mg/L - 0.70mg/L)	> 100 mg/L
	Phosphate	10.0mg/L (7.7mg/L - 11.5mg/L)	> 25 mg/L
	Sulphate	68mg/L (57mg/L - 92mg/L)	> 900 mg/L
	Nitrate-nitrogen	62.0mg/L (42.4mg/L - 80.3mg/L)	> 100 mg/L
	BOD	10mg/L (6mg/L - 24mg/L)	> 800 mg/L
	COD	987mg/L (785mg/L - 1,430mg/L)	> 2,000 mg/L
	Oil & Grease	<5mg/L (<5mg/L - <5mg/L)	> 20 mg/L
	Boron	5,143µg/L (4,530µg/L - 6,050µg/L)	> 7,000 µg/L
	Iron	1.44mg/L (1.21mg/L - 1.74mg/L)	> 7.5 mg/L
	Cadmium	<1.0µg/L (<1.0µg/L - <1.0µg/L)	> 1 µg/L
	Chromium	129µg/L (112µg/L - 146µg/L)	> 400 µg/L
	Copper	43µg/L (24µg/L - 61µg/L)	> 1,000 µg/L
	Nickel	114µg/L (98µg/L - 124µg/L)	> 800 µg/L
	Zinc	57µg/L (40µg/L - 100µg/L)	> 800 µg/L

All the leachate levels and effluent quality monitoring results were below the Limit Levels in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex F2*.

### 2.3.3

#### *Groundwater Monitoring*

##### *Monitoring Requirements and Equipment*

According to the updated EM&A Manual of the Project with incorporation of the proposed updates under the Amendment Summary approved by EPD on 15 June 2020, groundwater monitoring was carried out at 14 perimeter groundwater monitoring wells (including 5 up-gradient wells and 9 down-gradient wells) (i.e. MWX-1 to MWX-14) to monitor the groundwater quality and level of the perimeter groundwater monitoring wells at monthly interval.

The Limit Levels for groundwater quality is provided in *Table 2.24* below.

**Table 2.24** *Limit Levels for Groundwater Quality*

Location	Limit Levels	
	Ammoniacal-nitrogen (mg L <sup>-1</sup> )	COD (mg L <sup>-1</sup> )
MWX-1	5.00	30
MWX-2	5.00	30
MWX-3	5.00	30
MWX-4	7.63	36
MWX-5	5.00	30
MWX-6	5.00	46
MWX-7	6.55	36
MWX-8	15.85	50
MWX-9	7.30	71
MWX-10	5.00	30
MWX-11	5.00	30
MWX-12	5.00	30
MWX-13	5.00	30
MWX-14	5.00	30

A bladder pump with Teflon sampling tube and adjustable discharge rates was used for purging and taking of groundwater sample from the monitoring wells. Filtered groundwater samples was collected by connecting a disposable in-line filter system to the tubing of the sampling pump, prior to storage and analysis by ALS Technichem (HK) Pty Ltd. (HOKLAS Registration No. 066).

A portable dip meter with 5mm accuracy was used for measurement of groundwater level at each well. The dip meter have an audio indicator of the water level and was checked before use.

The measurements of pH and electrical conductivity (EC) were undertaken *in situ*. *In situ* monitoring instruments in compliance with the specifications listed under Section 4.3.2 of the updated EM&A Manual were used to undertake the groundwater quality monitoring for the Project.

Details of the equipment used and the monitoring locations are summarised in *Table 2.25* and illustrated in *Figure 2.1*, respectively.

**Table 2.25** *Groundwater Monitoring Details*

Monitoring Location	Frequency	Parameter	Monitoring Dates	Equipment
All groundwater monitoring wells (MWX-1 to MWX-14)	Monthly	<ul style="list-style-type: none"> <li>• Water level</li> <li>• pH</li> <li>• EC</li> <li>• COD</li> <li>• BOD5</li> <li>• TOC</li> <li>• Ammoniacal-nitrogen</li> <li>• Nitrate-nitrogen</li> <li>• Nitrite-nitrogen</li> <li>• TKN</li> <li>• TN</li> <li>• Sulphate</li> <li>• Sulphide</li> <li>• Carbonate</li> <li>• Bicarbonate</li> <li>• Phosphate</li> </ul>	<ul style="list-style-type: none"> <li>• Chloride</li> <li>• Sodium</li> <li>• Potassium</li> <li>• Calcium</li> <li>• Magnesium</li> <li>• Nickel</li> <li>• Manganese</li> <li>• Chromium</li> <li>• Cadmium</li> <li>• Copper</li> <li>• Lead</li> <li>• Iron</li> <li>• Zinc</li> <li>• Mercury</li> <li>• Boron</li> </ul>	7-8 Dec 2021 YSI Professional DSS (S/N: 17B102764)

*Monitoring Schedule for the Reporting Month*

The schedule for groundwater quality monitoring during the reporting period is provided in *Annex C*.

*Results and Observations*

The groundwater quality monitoring results and detailed monitoring results are summarised in *Table 2.26* and provided in *Annex F5*, respectively.

**Table 2.26 Summary of Groundwater Monitoring Results in the Reporting Period**

Location	Ammoniacal-nitrogen (mg L <sup>-1</sup> )		COD (mg L <sup>-1</sup> )	
	Monitoring Results	Limit Levels	Monitoring Results	Limit Levels
MWX-1	0.29	5.00	11	30
MWX-2	0.02	5.00	3	30
MWX-3	1.33	5.00	19	30
MWX-4	6.79	7.63	36	36
MWX-5	1.95	5.00	28	30
MWX-6	3.52	5.00	56	46
MWX-7	5.42	6.55	23	36
MWX-8	12.50	15.85	44	50
MWX-9	5.34	7.30	20	71
MWX-10	0.03	5.00	6	30
MWX-11	0.02	5.00	4	30
MWX-12	<0.01	5.00	<2	30
MWX-13	0.04	5.00	<2	30
MWX-14	<0.01	5.00	<2	30

Limit Levels exceedance was recorded for groundwater monitoring in the reporting period and actions in accordance with the Event and Action Plan presented in *Annex F2* were undertaken. Investigation of the Limit Levels exceedance was conducted and the investigation report is presented in *Annex F6*.

Based on the investigation conducted for the monitoring event with potential Limit Levels exceedance with the Contractor and the IEC, the groundwater quality (COD) exceedance at MWX-6 on 8 December 2021 was considered non Project-related. The Contractor was reminded to implement all relevant mitigation measures for the construction and operation works and maintain good site practice. The ET will keep track on the monitoring data and ensure Contractor’s compliance of the environmental requirements.

**2.4 LANDFILL GAS MONITORING**

**2.4.1 Monitoring Requirements**

According to the updated EM&A Manual of the Project, landfill gas monitoring was carried out at the perimeter of the waste boundary (monitoring wells), area between the SENTX Site boundary and the waste boundary (surface emission), occupied on-site building, service voids, utilities pit and manholes in the vicinity of the SENTX (build-up of landfill gas) during the operation/restoration phase.

The Limit Levels for landfill gas monitoring is provided in *Table 2.27* below.

**Table 2.27 Limit Levels for Landfill Gas Constituents**

Parameters	Monitoring Location	Limit Level (% (v/v))	
<b>Perimeter Landfill Gas Monitoring Wells (a)</b>			
Methane & Carbon Dioxide		Methane	Carbon Dioxide
	LFG1	1.0	2.2
	LFG2	1.0	4.2
	LFG3	1.0	6.3
	LFG4	1.0	7.0
	LFG5	1.0	3.4
	LFG6	1.0	9.1
	LFG7	1.0	1.5
	LFG8	1.0	1.7
	LFG9	2.5	1.7
	LFG10	1.0	1.6
	LFG11	3.0	2.0
	LFG12	13.2	1.5
	LFG13	22.5	2.7
	LFG14	1.0	1.6
	LFG15	18.2	2.0
	LFG16	1.0	1.7
	LFG17	10.5	2.1
	LFG18	2.3	1.9
	LFG19	6.3	3.1
	LFG20	1.0	4.2
	LFG21	1.0	4.3
	LFG22	1.0	3.9
	LFG23	1.0	10.3
	LFG24	1.0	4.0
	GP1	1.0	8.5
	GP2 (shallow)	1.0	11.4
	GP2 (deep)	1.0	10.4
	GP3 (shallow)	1.0	3.9
	GP3 (deep)	1.0	1.9
	GP4 (shallow)	1.0	2.3
	GP4 (deep)	1.0	5.6
	GP5 (shallow)	1.0	9.5
	GP5 (deep)	1.0	7.5
	GP6	1.0	7.8
	GP7	1.0	4.5
	GP12	1.0	2.3
	GP15	1.0	2.2
	P7	1.0	2.5
	P8	1.0	1.7
	P9	1.0	2.7
<b>Service Voids, Utilities Pits and Manholes</b>			
Methane (or flammable gas)	Service voids, utilities pits and manholes	1% by volume	



Parameters	Monitoring Location	Limit Level (% (v/v))
<b>Permanent Gas Monitoring System</b>		
Methane (or flammable gas)	Permanent Gas Monitoring System	1% by volume (20% LEL)

**Notes:**

- (a) Provisional Limit Levels established based on the pre-operation phase baseline and additional landfill gas monitoring results in the Pre-operation Baseline Monitoring Report.

Gas analysers in compliance with the specifications listed under Section 5.4.1 of the updated EM&A Manual were used to monitor the gas parameters at the landfill gas monitoring wells, service voids, utilities pits and manholes. The gas analyser was calibrated by a laboratory accredited under HOKLAS at yearly intervals and checked before use to ensure the validity and accuracy of the results. A portable dip meter was used to monitor the water level in the monitoring wells.

Permanent gas monitoring systems with pre-set alarm levels for methane at 20% lower explosive limit (LEL, equivalent to 1% methane gas (v/v)) were installed and operated in all occupied on-site buildings at SENTX. A central control panel is equipped to alert site personnel when the gas concentration at any detector reaches the alarm level.

The equipment used in the landfill gas monitoring programme is summarised in *Table 2.28*. The landfill gas monitoring locations for perimeter landfill gas monitoring wells and service voids, utilities and manholes along the Site boundary and within the SENTX site are illustrated in *Figure 2.3* and *Annex G1*, respectively.

**Table 2.28** *Landfill Gas Monitoring Details*

Monitoring Location	Frequency	Parameter	Monitoring Dates	Equipment
Perimeter landfill gas monitoring wells (LFG1 to LFG24, P7 to P9, GP1 to GP7, GP12 and GP15)	Monthly	<ul style="list-style-type: none"> <li>• Methane</li> <li>• Carbon dioxide</li> <li>• Oxygen</li> <li>• Atmospheric pressure</li> </ul>	14 Dec 2021	GA5000 (S/N: G507306)
Service voids, utilities and manholes along the Site boundary and within the SENTX Site (UU1 to UU28)	Monthly	<ul style="list-style-type: none"> <li>• Methane</li> <li>• Carbon dioxide</li> <li>• Oxygen</li> </ul>	16 Dec 2021	GA5000 (S/N: G507306)
Permanent gas monitoring system in all occupied on-site buildings	Continuous	<ul style="list-style-type: none"> <li>• Methane (or flammable gas) by permanent gas monitoring system</li> </ul>	1 - 31 Dec 2021	Permanent gas monitoring system

*Monitoring Schedule for the Reporting Month*

The schedule for dust monitoring during the reporting period is provided in *Annex C*.

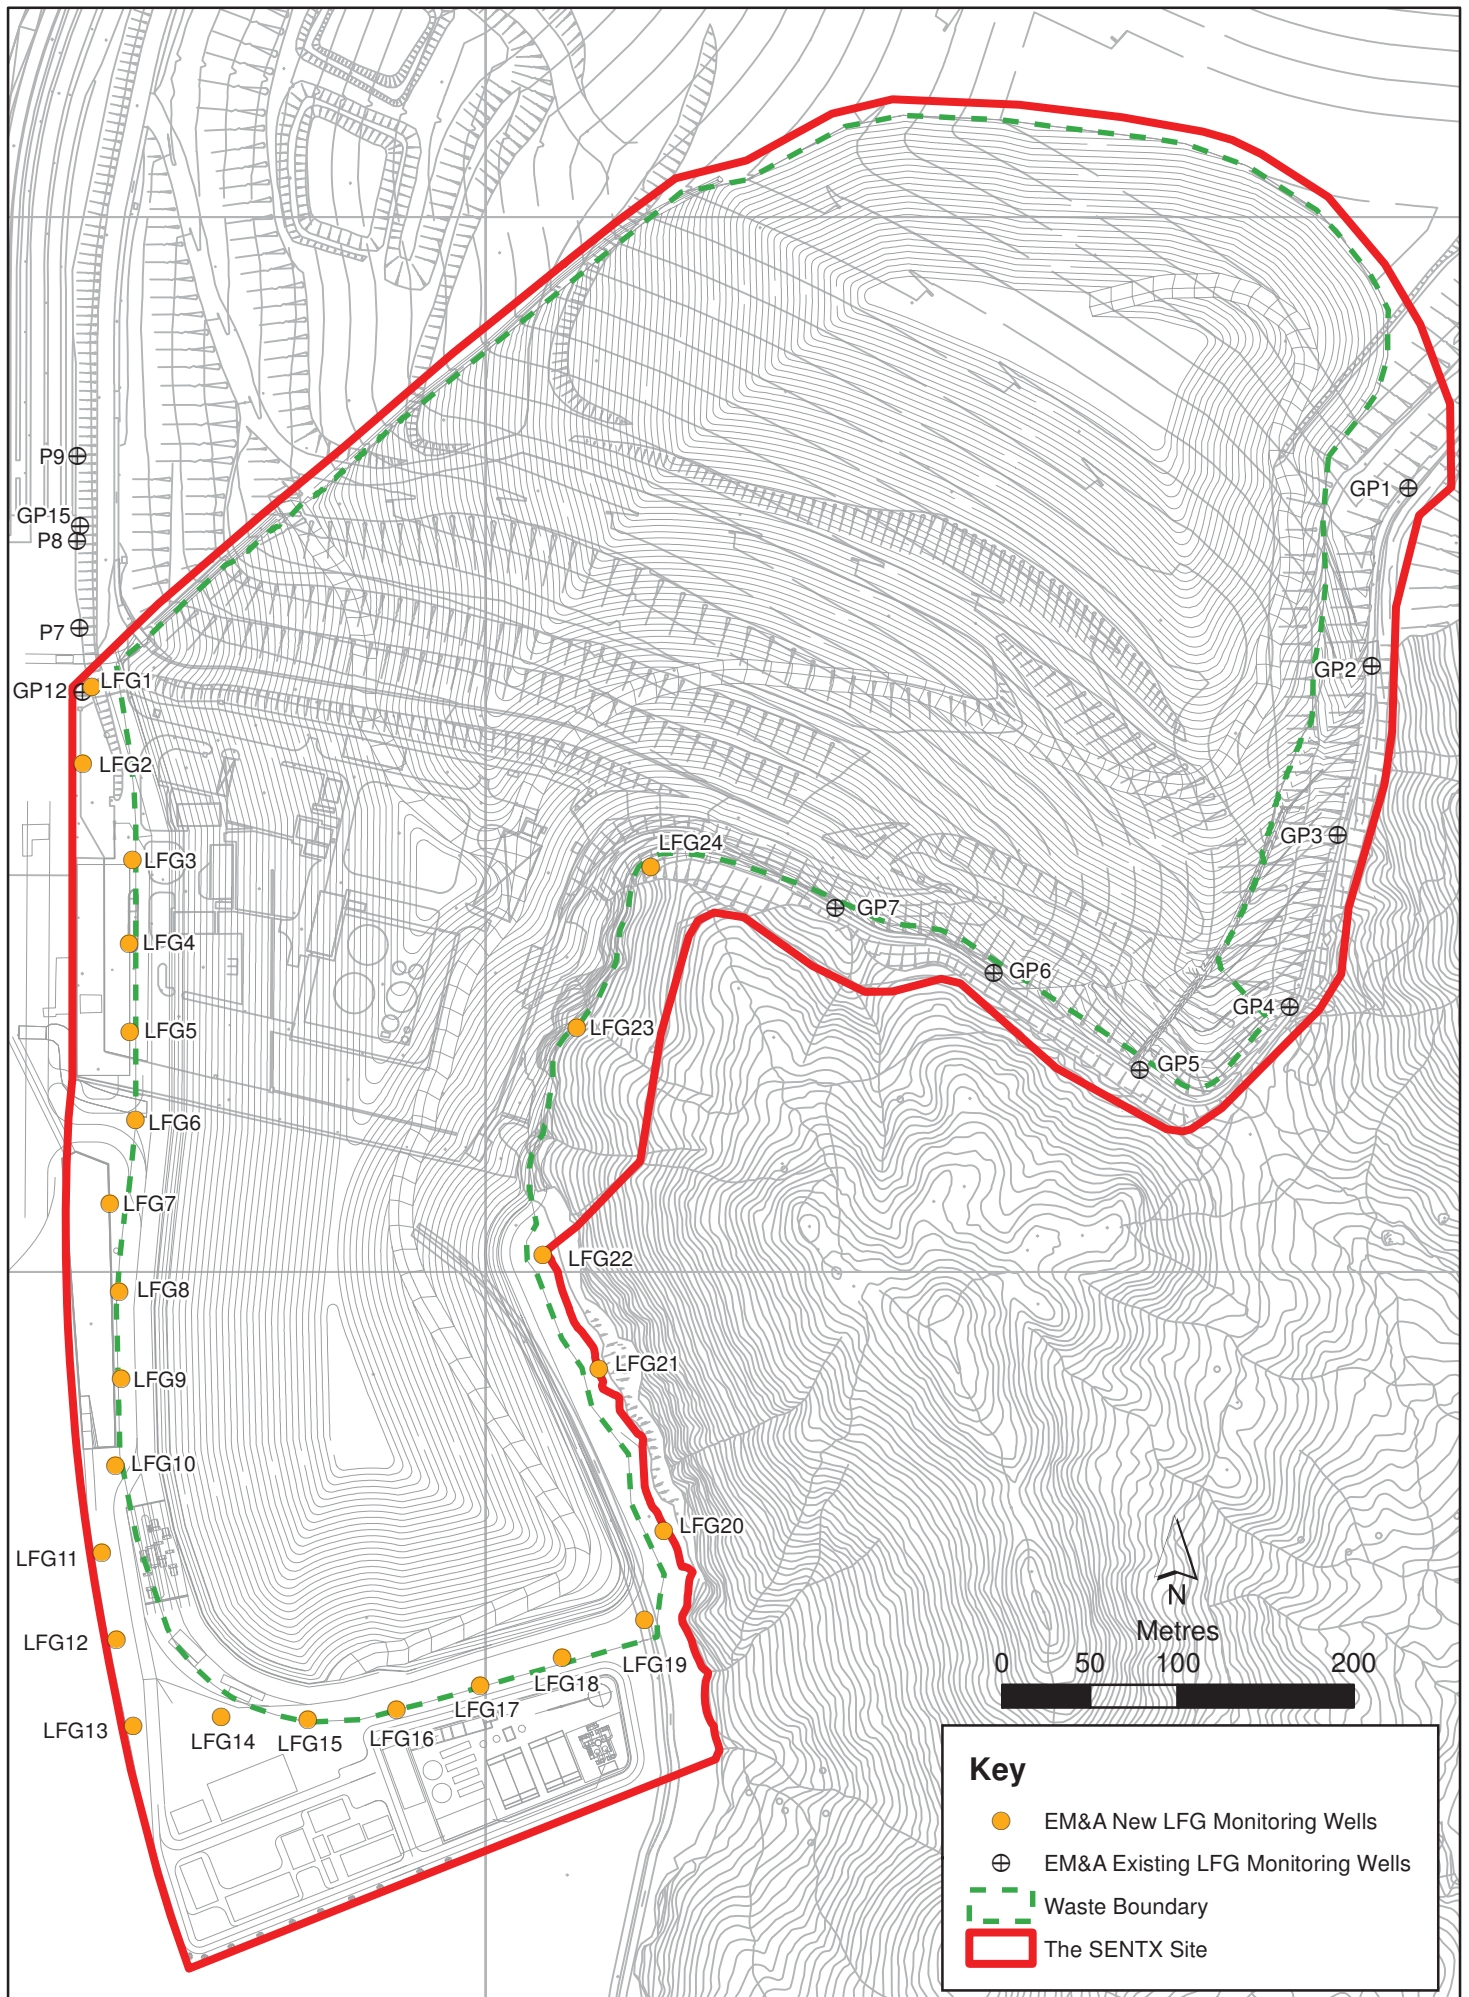


Figure 2.3

Location of Landfill Gas Monitoring Wells

*Results and Observations*

The landfill gas monitoring results are summarised and provided in *Tables 2.29 - 2.30 and Annex G2*, respectively.

**Table 2.29** *Summary of Landfill Gas Monitoring Results at Perimeter LFG Monitoring Wells in the Reporting Period*

Location	Methane (% (v/v))		Carbon Dioxide (% (v/v))	
	Monitoring Results	Limit Levels <sup>(a)</sup>	Monitoring Results	Limit Levels <sup>(a)</sup>
LFG1	0.0	1.0	0.1	2.2
LFG2	0.0	1.0	0.1	4.2
LFG3	0.0	1.0	0.9	6.3
LFG4	0.0	1.0	0.0	7.0
LFG5	0.0	1.0	0.2	3.4
LFG6	0.0	1.0	0.1	9.1
LFG7	0.0	1.0	0.0	1.5
LFG8	0.0	1.0	0.0	1.7
LFG9	0.0	2.5	0.1	1.7
LFG10	0.0	1.0	0.0	1.6
LFG11	0.0	3.0	0.1	2.0
LFG12	0.0	13.2	0.0	1.5
LFG13	19.6	22.5	0.0	2.7
LFG14	0.0	1.0	0.0	1.6
LFG15	1.8	18.2	0.4	2.0
LFG16	0.0	1.0	0.1	1.7
LFG17	0.0	10.5	0.2	2.1
LFG18	0.0	2.3	0.1	1.9
LFG19	0.0	6.3	0.1	3.1
LFG20	0.0	1.0	1.1	4.2
LFG21	0.0	1.0	2.0	4.3
LFG22	0.0	1.0	1.0	3.9
LFG23	0.0	1.0	2.1	10.3
LFG24	0.0	1.0	0.9	4.0
GP1	0.2	1.0	5.2	8.5
GP2 (shallow)	0.5	1.0	0.3	11.4
GP2 (deep)	0.2	1.0	0.1	10.4
GP3 (shallow)	0.3	1.0	2.5	3.9
GP3 (deep)	0.1	1.0	0.2	1.9
GP4 (shallow)	0.6	1.0	0.7	2.3
GP4 (deep)	0.7	1.0	1.7	5.6
GP5 (shallow)	0.1	1.0	5.4	9.5
GP5 (deep)	0.1	1.0	0.3	7.5
GP6	0.0	1.0	5.6	7.8
GP7	0.0	1.0	0.1	4.5
GP12	0.0	1.0	0.0	2.3
GP15	0.0	1.0	0.0	2.2
P7	0.0	1.0	0.0	2.5
P8	0.0	1.0	0.0	1.7
P9	0.0	1.0	0.0	2.7

**Notes:**

**(a)** Provisional Limit Levels established based on the pre-operation phase baseline and additional landfill gas monitoring results in the Pre-operation Baseline Monitoring Report.

**Table 2.30** *Summary of Landfill Gas Monitoring Results at Service Voids, Utilities Pits and Manholes in the Reporting Period*

Location	Methane (% (v/v))	
	Monitoring Results	Limit Levels
UU01	0.1	1.0
UU02	0.0	1.0
UU03	0.0	1.0
UU04	0.1	1.0
UU05	0.0	1.0
UU06	0.0	1.0
UU07	0.1	1.0
UU08	0.0	1.0
UU09	0.2	1.0
UU10	0.1	1.0
UU11	Inaccessible due to on-going construction work	1.0
UU12	Inaccessible due to on-going construction work	1.0
UU13	Inaccessible due to on-going construction work	1.0
UU14	Inaccessible due to on-going construction work	1.0
UU15	0.1	1.0
UU16	0.1	1.0
UU17	0.3	1.0
UU18	0.1	1.0
UU19	0.0	1.0
UU20	0.1	1.0
UU21	0.0	1.0
UU22	0.0	1.0
UU23	0.0	1.0
UU24	0.0	1.0
UU25	0.0	1.0
UU26	0.0	1.0
UU27	0.0	1.0
UU28	0.0	1.0

The alarm of the permanent gas monitoring systems with pre-set levels for methane at 20% lower explosive limit (LEL, equivalent to 1% methane gas (v/v)) was not triggered at all occupied on-site buildings at SENTX in November and December 2021.

All the landfill gas monitoring results were below the Limit Levels in the reporting period. No action is thus required to be undertaken in accordance with the Event and Action Plan presented in *Annex G3*.

## 2.5 LANDSCAPE AND VISUAL MONITORING

### 2.5.1 Monitoring Requirements

According to the updated EM&A Manual of the Project, the monthly landscape and visual audit was conducted on 26 October, 19 November and 22 December 2021 to monitor the implementation of the landscape and visual mitigation measures during construction and operation/ restoration phase.

All relevant environmental mitigation measures listed in the approved EIA Report and the updated EM&A Manual and their implementation status are summarised in *Annex B*.

## 2.5.2 *Results and Observations*

The Contractor has implemented environmental mitigation measures as stated in the approved EIA Report and the EM&A Manual.

Regarding the landscape and visual audit, the Contractor was reminded to maintain the advance screen planting works as soon as possible to ensure effective screening of views of project works from the High Junk Peak Trail. The Contractor has considered the mitigation measures during the design phase, including the preparation of the Construction Drawings and Detailed Landscape Design Drawings.

## 2.6 *EM&A SITE INSPECTION*

Site inspections were carried out on a weekly basis with the Contractor, IEC and ER to monitor the implementation of proper environmental pollution control and mitigation measures for air quality, noise, surface water quality and waste management under the Project. In the reporting period, 13 site inspections were carried out on 7, 15, 21 and 28 October, 4, 11, 17 and 26 November and 2, 9, 16, 23 and 30 December 2021.

Key observations during the site inspections are summarized in *Table 2.31*.

**Table 2.31** *Key Observations Identified during the Site Inspections in this Reporting Period*

<b>Inspection Date</b>	<b>Environmental Observations and Recommendations</b>
7 October 2021	<ul style="list-style-type: none"> <li>• The Contractor shall enhance watering around the site, especially at Cell4X and near existing LFG plant.</li> <li>• The Contractor shall provide drip trays for the chemical stored near existing LFG plant and new container area.</li> <li>• The Contractor shall remove the stagnant water accumulated near site entrance and spray larvicides for mosquito control, if necessary.</li> <li>• The Contractor shall maintain the wheel washing facilities at the site exit to ensure it is functioning properly at all times.</li> <li>• The Contractor shall remove the general refuse accumulated near new container area and at the temporary drains and dispose of the waste regularly.</li> </ul>
15 October 2021	<ul style="list-style-type: none"> <li>• The Contractor shall ensure that the Wetseps are functioning properly at all times and all surface water discharged at DP4T and DP6 is treated before discharge.</li> <li>• The Contractor shall clean up the oil spillage near DP6 and handle the clean-up materials as chemical waste.</li> <li>• The Contractor shall provide drip trays for the chemicals stored near MSE wall, new container area and X9B.</li> <li>• The Contractor shall remove the stagnant water accumulated at the drip tray near new container area and treat the clean-up materials as chemical waste.</li> </ul>

Inspection Date	Environmental Observations and Recommendations
21 October 2021	<ul style="list-style-type: none"> <li>• The Contractor shall fix the oil interceptor at DP4T Wetsep outlet to ensure that all surface water is treated by the oil interceptor before discharge.</li> <li>• The Contractor shall display NRMM labels on the generator near site entrance and excavator near sump house 3.</li> <li>• The Contractor shall remove the deposited silt and grit accumulated at DP6 regularly to ensure it is functioning properly at all times.</li> <li>• The Contractor shall provide drip trays for the chemicals stored at new container area and remove the stagnant water accumulated in the drip trays near Cell4X and site entrance and treat the clean-up materials as chemical waste.</li> <li>• The Contractor shall dispose of the emptied chemical container in the refuse skip near DP4T as chemical waste in the chemical waste cabinet.</li> <li>• The Contractor shall remove the general refuse accumulated near site entrance and new container area and dispose of the waste regularly to minimise odour and pest issues.</li> </ul>
28 October 2021	<ul style="list-style-type: none"> <li>• The Contractor shall fix the oil interceptor at DP4T Wetsep outlet to ensure that all surface water is treated by the oil interceptor before discharge.</li> <li>• The Contractor shall clean up the oil spillage near site entrance and existing LFG plant and handle the clean-up materials as chemical waste.</li> <li>• The Contractor shall provide proper drip trays for the chemicals stored at new container area and LTP and the generator near EPD building. The Contractor shall also remove the stagnant water accumulated in the drip trays near sump house 2 and EPD building and treat the clean-up materials as chemical waste.</li> <li>• The Contractor shall maintain the signage of the chemical waste cabinet at new container area in accordance with the COP.</li> <li>• The Contractor shall remove the general refuse accumulated around the site, especially near DP4T Wetsep, guardhouse and EPD building and dispose of the waste regularly to minimise odour and pest issues.</li> </ul>
4 November 2021	<ul style="list-style-type: none"> <li>• The Contractor shall replace the faded NRMM label displayed on the cherry picker near future weighbridge.</li> <li>• The Contractor shall maintain site drainage and remove the stagnant water and algae accumulated at the temporary drain at new container area and spray larvicides for mosquito control, if necessary.</li> <li>• The Contractor shall clean up the oil spillage at Southern perimeter bund and near EPD building and handle the clean-up materials as chemical waste.</li> <li>• The Contractor shall remove the concrete residue at the concrete truck washing area to ensure that all wash-water is properly contained.</li> <li>• The Contractor shall maintain the signage of the chemical waste cabinet at new container area in accordance with the COP.</li> <li>• The Contractor shall dispose of the emptied chemical containers near EPD building as chemical waste.</li> <li>• The Contractor shall remove the general refuse accumulated at new container area and dispose of the waste regularly to minimise odour and pest issues.</li> </ul>

Inspection Date	Environmental Observations and Recommendations
11 November 2021	<ul style="list-style-type: none"> <li>The Contractor shall spray water on the surface continuously during rock breaking operation at the buttress wall to minimise dust impact.</li> <li>The Contractor shall cover the cement stored at new container area to minimise dust impact.</li> <li>The Contractor shall clean up the oil spillage at the breaker near future guardhouse and at the EVA and handle the clean-up materials as chemical waste.</li> <li>The Contractor shall provide drip trays for the chemicals stored near buttress wall.</li> <li>The Contractor shall maintain the signage of the chemical waste cabinet at new container area in accordance with the COP.</li> </ul>
17 November 2021	<ul style="list-style-type: none"> <li>The Contractor shall clean up the oil spillage at the breaker near town gas plant and handle the clean-up materials as chemical waste.</li> <li>The Contractor shall remove the stagnant water accumulated at the drip tray near DP6 and treat the clean-up material as chemical waste.</li> <li>The Contractor shall remove the general refuse accumulated near DP4T, main haul road, weighbridge, town gas plant, drainage channel near maintenance building and DP6.</li> </ul>
26 November 2021	<ul style="list-style-type: none"> <li>The Contractor shall clean up the oil/ chemical spillage at the generator near DP6 and handle the clean-up materials as chemical waste.</li> <li>The Contractor shall provide drip trays for the chemicals stored near guardhouse and sediment trap.</li> <li>The Contractor shall dispose of the waste accumulated at the refuse skips near DP4T and DP6 regularly to minimise odour and pest issues.</li> </ul>
2 December 2021	<ul style="list-style-type: none"> <li>The Contractor shall clean up the oil spillage at sediment trap and handle the clean-up materials as chemical waste.</li> <li>The Contractor shall trim the climbing plants around the transplanted trees near DP6 regularly.</li> </ul>
9 December 2021	<ul style="list-style-type: none"> <li>The Contractor shall provide drip trays for the chemicals stored near EPD building, diesel fuel tank and at Cell 1X slope.</li> <li>The Contractor shall provide drip trays for the chemicals stored near EPD building, diesel fuel tank and at Cell 1X slope.</li> </ul>
16 December 2021	<ul style="list-style-type: none"> <li>The Contractor shall replace the faded NRMM labels displayed on the excavators near Cell 4X and EPD building.</li> <li>The Contractor shall remove the general refuse accumulated near town gas plant and at the sediment trap and dispose of the waste regularly.</li> </ul>
23 December 2021	<ul style="list-style-type: none"> <li>The Contractor shall replace the faded NRMM label displayed on the excavator near Cell 4X.</li> <li>The Contractor shall remove the general refuse accumulated near water services house and dispose of the waste regularly.</li> <li>The Contractor shall cover/ remove the stockpile of dusty materials near EPD building to minimise dust impact.</li> </ul>
30 December 2021	<ul style="list-style-type: none"> <li>The Contractor shall clean up the oil spillage at the generators near GVL building and handle the clean-up materials as chemical waste.</li> <li>The Contractor shall remove the general refuse accumulated in the refuse skip near LTP regularly to minimise odour and pest issues.</li> <li>The Contractor shall remove the stagnant water accumulated at the channel near sump house 3 and spray larvicides for mosquito control, if necessary.</li> </ul>

The Contractor has rectified all of the observations identified during environmental site inspections in the reporting period. Key environmental deficiencies identified and the corresponding rectification actions are presented in *Table 2.32*.

**Table 2.32 Summary of Environmental Deficiencies Identified and Corresponding Additional Control Measures**

Deficiencies	Rectifications Implemented	Proposed Additional Control Measures
<b>Surface Water</b>		
Intercepting channels & drainage system	<ul style="list-style-type: none"> <li>Reviewed drainage plan.</li> </ul>	<ul style="list-style-type: none"> <li>Provision of additional drainage channels.</li> <li>Expedite the construction of permanent sediment trap and discharge culverts.</li> </ul>
DP channels (design & regular silt removal)	<ul style="list-style-type: none"> <li>Carried out regular maintenance and cleaning of channels.</li> <li>DP4 channel: Area near the channel was paved with concrete and a bund was built.</li> <li>DP6 channel: Gravel piles on the channel were covered with concrete which serve as blocks for running water and to divide the channel into several sections. A pump was placed in the water zone in the upstream section to pump water to the Wetsep for treatment prior to the discharge to the last section before the weir plate.</li> <li>DP6: Pipes through the gravel piles between different channel sections were covered with geotextiles to block debris and silt.</li> </ul>	N.A.
Stockpiles & exposed soil	<ul style="list-style-type: none"> <li>Installed silt fencing near surface water channel along DP6 channel.</li> </ul>	<ul style="list-style-type: none"> <li>Improve soil covering.</li> <li>Compaction and cover for stockpiles and soil slopes.</li> </ul>
Wetsep (treatment capacity & number)	<ul style="list-style-type: none"> <li>Reviewed Wetsep capacity.</li> <li>Chemicals dosage of the Wetsep was increased to enhance the efficiency.</li> </ul>	<ul style="list-style-type: none"> <li>Install additional Wetsep.</li> </ul>
Backflow / ponding during heavy rainfall	<ul style="list-style-type: none"> <li>Raised with EPD (LDG) and CEDD.</li> </ul>	N.A.

**2.7**

**WASTE MANAGEMENT STATUS**

The Contractor has registered as a chemical waste producer under the Contract. Sufficient numbers of receptacles were available for general refuse collection and sorting.

As informed by the Contractor, waste generated during this reporting period include mainly inert C&D materials. Reference has been made to the waste flow table prepared by the Contractor. The quantities of different types of wastes and imported fill materials are summarised in *Table 2.33*.



**Table 2.33 Quantities of Different Waste Disposed and Imported Fill Materials**

Month/ Year	Inert C&D Materials <sup>(a)</sup> (in '000m <sup>3</sup> )	Imported Fill (in '000kg) <sup>(b)</sup>		Inert Construction Waste Re- used (in '000m <sup>3</sup> )	Non-inert Construction Waste <sup>(c)</sup> (in '000m <sup>3</sup> )	Recyclable Materials <sup>(d)</sup> (in '000kg)	Chemical Wastes (in '000kg)
		Rock	Soil				
Oct 2021	0.710	0	1912.010	0	0.053	0	0
Nov 2021	3.152	0	1378.680	0	0.121	222.310	0
Dec 2021	0.412	0	2043.810	0	0.058	11.660	0.800

Notes:

- (a) Inert construction wastes include hard rock and large broken concrete, and materials disposed as public fill. Density assumption: 1.6 (kg/L) for public fill.
- (b) Imported fill refers to materials generated from other project for on-site reuse.
- (c) Non-inert construction wastes include general refuse disposed at landfill. Density assumption: 0.9 (kg/L) for general refuse.
- (d) Recyclable materials include metals, paper, cardboard, plastics and others.

## 2.8 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

A summary of the Environmental Mitigation Implementation Schedule is presented in *Annex B*. The necessary mitigation measures were implemented properly for the Project.

## 2.9 SUMMARY OF EXCEEDANCES OF THE ENVIRONMENTAL QUALITY PERFORMANCE LIMIT

The construction and operation/ restoration phase noise and landfill gas monitoring results complied with the Action and Limit Levels in the reporting period. One exceedance of the Limit Level for TSP and one exceedance of the Limit Level for landfill gas flare stack emission (CO) were recorded for air quality impact monitoring in the reporting period. The TSP exceedance at AM4 on 13 December 2021 was considered non Project-related upon further investigation. The landfill gas flare stack emission (CO) exceedance on 17 December 2021 was found to be Project-related. One exceedance of the Limit Level for groundwater (COD) was recorded for water quality impact monitoring in the reporting period. The groundwater (COD) exceedance at MWX-6 on 8 December 2021 was considered non Project-related upon further investigation.

Cumulative statistics on exceedances is provided in *Annex H*.

## 2.10 SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

There were no complaints, notification of summons or prosecution recorded in the reporting period.

Statistics on complaints, notifications of summons and successful prosecutions are summarised in *Annex H*.

This Quarterly EM&A Report presents the findings of the EM&A activities undertaken during the period from 1 October to 31 December 2021 in accordance with the updated EM&A Manual and the requirements of the Environmental Permit (EP-308/2008/B).

Air quality (24-hour TSP, odour, thermal oxidiser, landfill gas flare and landfill gas generator stack emission), noise, water quality (surface water, leachate and groundwater) and landfill gas monitoring were carried out in the reporting period. Results for noise and landfill gas monitoring complied with the Action and Limit Levels in the reporting period. One exceedance of the Limit Level for TSP, one exceedance of the Limit Level for landfill gas flare stack emission (CO) and one exceedance of the Limit Level for groundwater (COD) were recorded in the reporting period.

Thirteen environmental site inspections were carried out during the reporting period. Environmental deficiencies were identified during the site inspection and the Contractor has proposed additional control measures to rectify the deficiencies.

There were no complaints, notification of summons or prosecution recorded in the reporting period.

It is noted that most environmental pollution control and mitigation measures were properly implemented and the construction and operation activities of the Project did not introduce any adverse impact to the sensitive receivers in the reporting period. Yet, some environmental deficiencies were identified during the reporting period and additional control measures have been proposed by the Contractor to rectify the corresponding deficiencies. The monitoring programme has been reviewed and was considered as adequate to cater for the nature of works in progress. Change to the monitoring programme was thus not recommended at this stage. The monitoring programme will be evaluated as appropriate in the next reporting period. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Annex A

## Work Programme



Task ID	Task Name	Start	End	Duration	Predecessors
101	<b>SA2.0.0.0 Landfill Closures</b>	05-Jun-19	23-Jan-21	815	
102	<b>SA2.0.0.1 Landfill Cell 2</b>	05-Jun-19	23-Jan-21	815	
103	6.0.1.1 (C1-05) Earth Work (Ewms)	17-Jun-19	19-Feb-20	9	11-1300 FS, 13-2000 FS, 13-4000 FS, 13-1400 FL, 13-2000 FS
104	6.0.1.2 (C1-10) Earth Work (Ewms)	10-Jul-19	09-Jun-20	84	11-1300 FS, 13-2000 FS, 13-3000 FS, 13-1400 FL, 13-2000 FS, 13-1500 FS, 13-1700 FS, 13-2000 FS
105	6.0.1.3 (C1-10) Infrastructure Cell 2(C1)	30-Sep-19	06-Sep-20	74	11-1300 FS, 13-2000 FS, 13-3000 FS, 13-1400 FL, 13-2000 FS, 13-1500 FS
106	6.0.1.4 (C1-10) Site Remediation	13-Oct-19	10-Jan-20	14	11-1300 FS, 13-2000 FS, 13-3000 FS, 13-1400 FL, 13-2000 FS, 13-1500 FS
107	6.0.1.5 (C1-1400) Pump Station (PSt04)	45-Oct-19	23-Jul-20	84	13-1400 FS, 13-1500 FS
108	6.0.1.6 (C1-1500) Long Works	01-Nov-19	20-Nov-20	710	41-1000 FS, 43-1000 FS, 43-1100 FS, 43-1200 FS, 43-1300 FS, M12 3 FS, 43-1400 FS
109	6.0.1.7 (C1-1600) Practical Stone Laying & Leachate Collection Pipe	25-Dec-19	23-Nov-20	810	41-1000 FS, 41-1100 FS, 43-1400 FS, 43-1500 FS, 43-1600 FS
110	6.0.1.8 (C1-1700) Install Leachate From Main	15-Dec-19	08-Dec-20	84	43-1700 FS, 41-1800 FS, 43-1400 FS
111	6.0.1.9 (C1-1800) Install Leachate From Main	15-Dec-19	20-Nov-20	108	41-1800 FS, 43-1800 FS, 43-1900 FS, 43-2000 FS
112	<b>SA2.0.0.2 Landfill Cell 3</b>	25-Feb-20	07-Feb-22	435	
113	6.0.1.1 (C2-00) Earth Work (Ewms)	25-Feb-20	08-Apr-20	9	11-1300 FS, 13-4000 FS, 13-1000 FS, 13-4000 FL, 13-1000 FS, 13-1400 FS, 13-2000 FS, 41-1300 FS, 43-2700 FS, M12 3 FS, 41- M12 2 FS, 43-2000 FS, 41-13-2000 FS, 13-2700 FS, 13-2800 FS, 43-4000 FS
114	6.0.1.2 (C2-00) Earth Work (Ewms)	110	25-Apr-20	17	11-1300 FS, 13-1000 FS, 13-4000 FS, 43-4000 FS, 43-3000 FS, 45-13000 FS
115	6.0.1.3 (C2-00) Infrastructure Cell 3(C1)	100	25-Jun-20	78	11-1300 FS, 13-1000 FS, 13-4000 FS, 43-4000 FS, 43-3000 FS, 45-13000 FS
116	6.0.1.4 (C2-00) Site Remediation	75	05-Jun-20	20	11-1300 FS, 13-1000 FS, 13-4000 FS
117	6.0.1.5 (C2-00) Pump Station (PSt05)	42	23-Jun-20	9	13-2000 FS, 13-2000 FS
118	6.0.1.6 (C2-00) Long Works	100	01-Oct-21	420	41-1000 FS, 43-1000 FS, 43-2000 FS, 43-2100 FS, 43-1000 FS
119	6.0.1.7 (C2-00) Practical Stone Laying & Leachate Collection Pipe	25	09-Jun-21	420	43-2400 FS, 41-1800 FS, 43-2300 FS, 43-2700 FS, M12 3 FS
120	6.0.1.8 (C2-00) Install Leachate From Main	75	01-Oct-21	0	43-2000 FS, 41-1800 FS, 43-2300 FS
121	6.0.1.9 (C2-00) Install Leachate From Main	35	05-Oct-21	18	41-1800 FS, 43-1800 FS
122	<b>SA2.0.0.3 Landfill Cell 4</b>	09-Mar-21	13-Jun-22	36	
123	6.0.1.4 (C3-00) Remediation Point at Off-Route Road	100	07-Mar-21	0	43-1000 FS
124	6.0.1.5 (C3-00) Earth Work (Ewms) and M&E Wall	100	07-Mar-21	23	43-3000 FS, 43-1000 FS, 43-2000 FS, 43-1400 FL, 43-2000 FS, 43-2000 FS, 43-4100 FS, 43-1800 FS, M12 3 FS, M12 2 FS, M12 1 FS
125	6.0.1.6 (C3-00) Site Remediation	100	05-Jun-21	23	43-1000 FS, 43-1100 FS, 43-1200 FS, 43-1300 FS, 43-2000 FS, 43-2100 FS
126	6.0.1.7 (C3-00) Pump Station (PSt06)	45	05-Jun-21	23	43-2000 FS, 43-2000 FS
127	6.0.1.8 (C3-00) Long Works	100	01-Oct-21	0	41-1000 FS, 43-2000 FS, 43-2100 FS, 43-2000 FS, 43-1800 FS, M12 6 FS
128	6.0.1.9 (C3-00) Practical Stone Laying & Leachate Collection Pipe	40	13-Feb-21	13	41-1000 FS, 43-2000 FS, 43-2100 FS, 43-2000 FS, 43-1800 FS, M12 6 FS
129	6.0.1.10 (C3-00) Install Leachate From Main & Remove Temporary Leachate Pipe	30	19-Jun-21	18	41-1000 FS, 43-2000 FS, 43-2100 FS
130	<b>SA2.0.0.4 Drainage - Site Remediation</b>	19-Jun-21	02-Jun-22	466	
131	6.0.1.1 (C4-00) Perimeter Channel (WC) at Cell 2 Western Bund	15	09-Jun-21	104	43-1100 FS
132	6.0.1.2 (C4-00) Perimeter Channel (WC) at Cell 2 Western Bund	30	09-Jun-21	100	43-1100 FS
133	6.0.1.3 (C4-00) Perimeter Channel (WC) at Cell 2 Western Bund	30	13-Jun-21	104	43-1100 FS
134	6.0.1.4 (C4-00) Perimeter Channel (WC) at Cell 2 Western Bund	30	09-Jun-21	466	43-2000 FS
135	6.0.1.5 (C4-00) Perimeter Channel (WC) at Cell 2 Western Bund	15	09-Jun-21	100	43-2000 FS
136	6.0.1.6 (C4-00) Connection to Existing CFS	10	25-Jun-21	46	43-2000 FS, 43-3000 FS, 43-3700 FL, 43-3800 FS
137	6.0.1.7 (C4-00) Remove Gas Off Channel C-T at Bottom of Buffering Wall	30	09-Jun-21	419	43-2000 FS, 56
138	6.0.1.8 (C4-00) Temporary Channel (C-T) at Infrastructure Area	30	19-Jun-21	14	43-1000 FS
139	<b>SA2.0.0.5 Drainage - Operational Phase</b>	19-Jun-21	30-Jun-22	500	
140	6.0.1.1 (C4-00) Construct Temporary Channel (C-T) from M11 & Banking to Cell 2	10	07-Jun-21	53	21-1000 FS, 11-1300 FS, 43-1000 FS
141	6.0.1.2 (C4-00) Construct Temporary Channel (C-T) from M11 & Banking to Cell 2	5	27-Jun-21	31	43-4000 FS
142	6.0.1.3 (C4-00) Reconstruction of GMPF across Cell 4	30	01-Nov-21	53	43-1100 FS, 43-1200 FS, 43-4400 FS
143	<b>SA2.0.0.6 Utilities - Works Associated with Utility Undertakes</b>	200	06-Jun-21	600	
144	6.0.1.1 (C4-00) L10 L10	170	05-Jun-21	170	
145	6.0.1.2 (C4-00) L10 L10	100	06-Jun-21	100	20-2000 FS, 12-1200 FS, 14-4000 FS
146	6.0.1.3 (C4-00) L10 L10	30	28-Jun-21	600	43-4000 FS
147	<b>SA2.0.0.7 Landfill Cells</b>	15	15-Jun-21	600	
148	6.0.1.1 (C4-00) Landfill Cells (M11) to M13	15	15-Jun-21	600	43-4000 FS
149	6.0.1.2 (C4-00) Gas Water Retention & Collection at CFS	10	30-Jun-21	600	43-4000 FS, 34-4000 FS
150	<b>SA2.0.0.8 Building &amp; Civil Works</b>	100	01-Jul-21	600	
151	<b>SA2.0.0.9 Post Area C</b>	100	01-Jul-21	600	
152	<b>SA2.0.0.10 L10 L10 - Infrastructure</b>	100	01-Jul-21	600	
153	6.0.1.1 (C4-00) L10 L10	100	01-Jul-21	600	13-1000 FS
154	6.0.1.2 (C4-00) L10 L10	100	01-Jul-21	600	13-1000 FS
155	<b>SA2.0.0.11 Landfill Cells</b>	100	01-Jul-21	600	
156	6.0.1.1 (C4-00) L10 L10	100	01-Jul-21	600	13-1000 FS
157	6.0.1.2 (C4-00) L10 L10	100	01-Jul-21	600	13-1000 FS
158	6.0.1.3 (C4-00) L10 L10	100	01-Jul-21	600	13-1000 FS
159	<b>SA2.0.0.12 L10 L10 - Post Area C</b>	100	01-Jul-21	600	
160	6.0.1.1 (C4-00) L10 L10	100	01-Jul-21	600	13-1000 FS, M12 3 FS
161	6.0.1.2 (C4-00) L10 L10	100	01-Jul-21	600	13-1000 FS

Annex B

# Environmental Mitigation Implementation Schedule

## Annex B Environmental Mitigation Implementation Schedule

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
<b>Air Quality – Construction Phase</b>								
4.8.1	AQ1	<p><u>Blasting</u></p> <ul style="list-style-type: none"> <li>The area within 30m of the blasting area will be wetted prior to blasting.</li> <li>Blasting will not be carried out when the strong wind signal or tropical cyclone warning signal No. 3 or higher is hoisted, unless this is with the express prior permission of the Commissioner of Mines.</li> <li>loose material and stones in the Site will be removed prior to the blast operation</li> <li>During blasting, blast nets, screens and other protective covers will be used to prevent the projection of flying fragments and material resulting from blasting</li> </ul>	To minimise potential dust nuisance	Blasting area and 30m of blasting area	SENTX Contractor	✓	<i>Air Pollution Control (Construction Dust) Regulations</i>	Not applicable. Blasting is not required in the latest landfill design
4.8.1	AQ2	<p><u>Rock Drilling</u></p> <ul style="list-style-type: none"> <li>Watering will be carried out at the rock drilling activities to avoid fugitive dust emissions.</li> </ul>	To minimise potential dust nuisance	Rock drilling area	SENTX Contractor	✓	<i>Air Pollution Control (Construction Dust) Regulations</i>	Not applicable. Rock drilling is not required in the latest landfill design
4.8.1	AQ3	<u>Site Access Road</u>	To minimise	Main haul	SENTX	✓	<i>Air Pollution Control</i>	Implemented

(1) D=Design; C=Construction; O/R=Operation/Restoration; A=Aftercare



EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
4.8.1	AQ4	<ul style="list-style-type: none"> <li>The main haul road will be kept clear of dusty materials or sprayed with water.</li> <li>The main haul road will be paved with aggregate or gravel.</li> <li>Vehicle speed will be limited to 10kph.</li> </ul>	potential dust nuisance	road	Contractor		(Construction Dust) Regulations  HKAQO and EIAO-TM Annex 4	
4.8.1	AQ4	<ul style="list-style-type: none"> <li><u>Stockpiling of Dusty Materials</u></li> <li>Any stockpile of dusty materials will be covered entirely by impervious sheeting or placed in an area sheltered on the top and three sides or sprayed with water so as to ensure that the entire surface is wet.</li> </ul>	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓	Air Pollution Control (Construction Dust) Regulations  HKAQO and EIAO-TM Annex 4	Deficiency of mitigation measures but rectified by the Contractor
4.8.1	AQ5	<ul style="list-style-type: none"> <li><u>Loading, unloading or transfer of dusty materials</u></li> <li>All dusty materials will be sprayed with water immediately prior to any loading, unloading or transfer operation so as to maintain the dusty material wet.</li> </ul>	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓	Air Pollution Control (Construction Dust) Regulations  HKAQO and EIAO-TM Annex 4	Reminder was given to the Contractor
4.8.1	AQ6	<ul style="list-style-type: none"> <li><u>Site Boundary and Entrance</u></li> <li>Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of height not less than 2.4m from ground level will be provided along the entire length of that portion of the site boundary except for the site entrance or exit.</li> </ul>	To minimise potential dust nuisance	Site boundary and entrance	SENTX Contractor	✓	Air Pollution Control (Construction Dust) Regulations  HKAQO and EIAO-TM Annex 4	Not applicable
4.8.1	AQ7	<ul style="list-style-type: none"> <li><u>Excavation Works</u></li> </ul>	To minimise	All	SENTX	✓	Air Pollution Control	Deficiency of

EIA Ref.	EM&A Ref	Environmental Mitigation Measures/	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
4.8.1	AQ8	<ul style="list-style-type: none"> <li>Working area of any excavation or earth moving operation will be sprayed with water immediately before, during and immediately after the operation so as to ensure that the entire surface is wet.</li> </ul>	<p>potential dust nuisance</p> <p>To minimise potential dust nuisance</p>	<p>construction works area</p> <p>All construction works area</p>	Contractor	✓	<p>(Construction Dust) Regulations</p> <p>HKAQO and EIAO-TM Annex 4</p> <p>Air Pollution Control (Construction Dust) Regulations</p> <p>HKAQO and EIAO-TM Annex 4</p>	<p>mitigation measures but rectified by the Contractor</p> <p>Implemented</p>
4.8.1	AQ9	<ul style="list-style-type: none"> <li>The area where the demolition works are planned to take place will be sprayed with water immediately prior to, during and immediately after the demolition activities.</li> <li>Any dusty materials remaining after a stockpile is removed will be wetted with water and cleared from the surface of roads or street.</li> </ul>	<p>To minimise potential dust nuisance</p>	<p>All construction works area</p>	SENTX Contractor	✓	<p>Air Pollution Control (Construction Dust) Regulations</p> <p>HKAQO and EIAO-TM Annex 4</p>	Implemented
4.8.1	AQ10	<ul style="list-style-type: none"> <li>Effective dust screens, sheeting or netting will be provided to enclose the scaffolding from the ground level up to the highest level of the scaffolding.</li> <li>Should a stone crushing plant be needed on site, the control measures recommended in the <i>Best Practicable Means Requirement for Mineral Works (Stone Crushing Plants) BPM 11/1</i> should be implemented.</li> </ul>	<p>To minimise potential dust nuisance</p>	<p>All construction works area</p> <p>Stone crushing plant/ construction phase</p>	SENTX Contractor	✓	<p>Air Pollution Control (Construction Dust) Regulations</p> <p>HKAQO and EIAO-TM Annex 4</p> <p><i>Best Practicable Means Requirement for Mineral Works (Stone Crushing Plants) BPM 11/1</i></p>	<p>Not applicable. Stone crushing plant is not required in the latest landfill design</p>

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
4.8.1	AQ11	Good site practices such as regular maintenance and checking of the diesel powered mechanical equipment will be adopted to avoid any black smoke emissions and to minimize gaseous emissions.	To minimise potential dust nuisance	All construction works area	SENTX Contractor	✓	HKAQO and EIAO-TM Annex 4	Implemented
4.10.1	AQ12	Dust monitoring once every 6 days	Ensure the dust generated from the project meets the air quality requirement	At monitoring locations shown in Figure 3.2a	SENTX Contractor	✓	HKAQO and EIAO-TM Annex 4	Implemented
<b>Air Quality – Operation, Restoration and Aftercare Phases</b>								
4.8.2	AQ13	<u>Odour</u> <ul style="list-style-type: none"> <li>Enclosing the weighbridge area</li> </ul>	To minimise odour nuisance	Weighbridge area	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less odorous, enclosing the weighbridge area is not necessary
4.8.2	AQ14	<ul style="list-style-type: none"> <li>Providing a vehicle washing facility before the exit of SENTX and providing sufficient signage to remind RCV drivers to pass through the facility before leaving SENTX</li> </ul>	To minimise odour nuisance	Vehicle washing facility	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ15	<ul style="list-style-type: none"> <li>Reminding the RCV drivers to empty the liquor collection sump and close the valve</li> </ul>	To minimise odour nuisance	Tipping face	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste

EIA Ref.	EM&A Ref	Environmental Mitigation Measures/ Protection Measures	Objectives of the Recommended Measures & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
			before leaving the tipping face					only, which is relatively dry, the amount of liquor generated is expected to minimal
4.8.2	AQ16	<ul style="list-style-type: none"> <li>Washing down the area where spillage of RCV liquor is discovered promptly</li> </ul>	To minimise odour nuisance	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only, which is relatively dry, the amount of liquor generated is expected to minimal.
4.8.2	AQ17	<ul style="list-style-type: none"> <li>Reminding operators to properly maintain their RCVs and ensure that liquor does not leak from the vehicles</li> </ul>	To minimise odour nuisance	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only, which is relatively dry, the amount of liquor generated is expected to minimal.
4.8.2	AQ18	<ul style="list-style-type: none"> <li>Installation of landfill gas control system to enhance collection of landfill gas from the waste mass and hence minimise odour associated with fugitive landfill gas emissions</li> </ul>	To minimise odour nuisance	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ19	<ul style="list-style-type: none"> <li>Progressive restoration of the areas which</li> </ul>	To minimise	SENTX Site	SENTX	✓	EIAO-TM Annex 4	Implemented

EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
				reach the finished profile (a final capping system including an impermeable liner will be put in place) and installation of a permanent landfill gas extraction system		Contractor			
4.8.2	AQ20	<ul style="list-style-type: none"> <li>Installing deodorizers along the site boundary adjacent to the ASRs</li> </ul>		To minimise odour nuisance	SENTX Site boundary	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less odorous, installation of deodorizers is not necessary.
4.8.2	AQ21	<ul style="list-style-type: none"> <li>Erecting a vertical barrier, wall or structure softened by planting rows of trees/shrubs or landscape feature along the site boundary, particularly in the areas near the ASRs</li> </ul>		To minimise odour nuisance	SENTX Site boundary	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2 and SENTX latest design	AQ22	<ul style="list-style-type: none"> <li>Maintaining the size of the active tipping face not greater than 1,200 m<sup>2</sup></li> </ul>		To minimise odour nuisance	Active tipping face	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ23	<ul style="list-style-type: none"> <li>Promptly covering the MSW with soil or selected inert materials to control odour emissions</li> </ul>		To minimise odour nuisance	Active tipping face	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. SENTX will not receive MSW.
4.8.2	AQ24	<ul style="list-style-type: none"> <li>Maintaining the size of the special waste trench not greater than 6m (l) × 2.5m (w)</li> </ul>		To minimise odour nuisance	Special waste trench	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. SENTX will not have

EIA Ref.	EM&A Ref	Environmental Mitigation Measures/ Protection Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
4.8.2 and latest design	AQ25	Covering daily covered area with a tarpaulin sheet or 300mm of soil after the landfill operating hours	To minimise odour nuisance	Daily covered area	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented any special waste trench.
4.8.2	AQ26	Covering special waste trench with 600 mm of soil and an impervious liner after 5 pm	To minimise odour nuisance	Special waste trench	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. SENTX will not have any special waste trench.
4.8.2	AQ27	Covering the non-active tipping face with 600mm of soil and an impermeable liner (on top of the intermediate cover), which will not only control odour emissions from landfilled waste but also enhance landfill gas extraction by the landfill gas extraction system	To minimise odour nuisance	Intermediate cover	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ28	Applying deodorizers or odour suppression agents to control odour emissions from the active tipping face and special waste trench, if any, through spraying or fogging equipment	To minimise odour nuisance	Active tipping face and special waste trench	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less odorous, installation of deodorizers is not necessary. Moreover, SENTX will not have any special waste

EIA Ref.	EM&A Ref	Environmental Mitigation Measures/ Protection Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
4.8.2	AQ29	<ul style="list-style-type: none"> <li>Providing a mobile cover with retractable or suitable opening to cover up the opening of the special waste trench except during waste deposition and a suitable odour removal unit. The mobile cover should be equipped with powered extraction and suitable odour removal unit for purifying the trapped gas inside the trench before release into the atmosphere</li> </ul>	To minimise odour nuisance	Special waste trench	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. SENTX will not have any special waste trench.
4.8.2 and latest design	AQ30	<ul style="list-style-type: none"> <li>Providing a thermal oxidizer for the leachate treatment plant</li> </ul>	To minimise odour nuisance as a result of breakdown of thermal oxidizer	Leachate treatment plant	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2 and latest design	AQ31	<ul style="list-style-type: none"> <li>Enclosing all the leachate storage and treatment tanks (except for the Sequential Batch Reactor (SBR) or Membrane Bioreactor (MBR) tanks) and diverting the exhaust air from these tanks to a thermal oxidizer or flare to avoid potential odour emissions from the LTP</li> </ul>	To minimise odour nuisance	Leachate treatment plant	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.8.2	AQ32	<ul style="list-style-type: none"> <li>Rescheduling of waste filling activities on-site by avoiding waste filling activities carrying out at the northern area of the site in the summer months between July to November</li> </ul>	To minimise odour nuisance	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 4	Not Applicable. As SENTX will receive construction waste only which is significantly less

EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
4.8.2 and latest design	AQ33	<u>Dust, Gaseous Emission and LFG including Volatile Organic Compounds (VOCs)</u> <ul style="list-style-type: none"> <li>Keeping the main haul road to the waste filling area wet by regular watering ;</li> </ul>	To minimise dust nuisance	SENTX Site	SENTX Contractor	✓	HKAQO and EIAO-TM Annex 4	Implemented odorous, rescheduling of waste filling activities is not necessary.
4.8.2	AQ34	<ul style="list-style-type: none"> <li>Compacting the exposed daily and intermediate covered areas well to avoid fugitive dust emission;</li> </ul>	To minimise dust nuisance	SENTX Site	SENTX Contractor	✓	HKAQO and EIAO-TM Annex 4	Implemented
4.8.2	AQ35	<ul style="list-style-type: none"> <li>Limiting the vehicle speed within SENTX site boundary;</li> </ul>	To minimise dust nuisance	SENTX Site	SENTX Contractor	✓	HKAQO and EIAO-TM Annex 4	Implemented
4.8.2	AQ36	<ul style="list-style-type: none"> <li>Providing vehicle washing bay to avoid vehicles carrying dust to public roads;</li> </ul>	To minimise dust nuisance	SENTX Site	SENTX Contractor	✓	HKAQO and EIAO-TM Annex 4	Implemented
4.8.2	AQ37	<ul style="list-style-type: none"> <li>Switching off the engine when the diesel-driven equipment is idling;</li> </ul>	To minimise gaseous emissions	SENTX Site	SENTX Contractor	✓	-	Implemented
4.8.2	AQ38	<ul style="list-style-type: none"> <li>Maintaining the construction equipment properly to avoid any black smoke emissions;</li> </ul>	To minimise gaseous emissions	SENTX Site	SENTX Contractor	✓	-	Implemented
4.8.2	AQ39	<ul style="list-style-type: none"> <li>Providing sufficient underground landfill gas collection system to capture the landfill gas</li> </ul>	To minimise gaseous	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented



EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
			generated as much as possible; and emissions, including LFG and VOCs					
4.8.2	AQ40	Periodic inspections of the final cover should be undertaken to ensure that the capping layer is in good conditions at all times.	To minimise gaseous emissions, including LFG and VOCs	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.10.2	AQ41	Monitoring of ambient TSP once every 6 days	Ensure the dust emission from the project meets the dust requirement <i>Figure 11.3a</i>	At monitoring locations shown in <i>Figure 11.3a</i>	SENTX Contractor	✓	HKAQO and EIAO-TM Annex 4	Implemented
4.10.2	AQ42	Monitoring of ambient VOCs, ammonia and H <sub>2</sub> S, quarterly	Ensure the gaseous emission from the project meets the air quality requirement	At monitoring locations shown in <i>Figure 11.3a</i>	SENTX Contractor	✓	Odour thresholds or 1% of Occupational Exposure Limit (OEL) as stipulated in the "UK Health and Safety Executive (HSE) EH 40/05 Occupational Exposure Limits", whichever is lower.	Implemented
4.10.2 and SENTX latest	AQ43	Monitoring of parameters for thermal oxidizer, flares and generator in accordance with requirements stated in Tables 3.4a, 3.5a and 3.6a of the EM&A Manual respectively.	Ensure the gaseous emission from the project meets the air	At the flares and thermal oxidizer stacks when they are	SENTX Contractor	✓ (1)	Emission Limits specified in Contract	Implemented

(1) For LFG flare and LFG generator only.

EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
			quality requirement	in operation		D C O/R A		
4.10.2	AQ44	To confirm design assumption of ammonia, it is recommended that the ammonia concentration in the flue gas of the thermal oxidiser be monitored during the commissioning stage of the thermal oxidiser. If required, an emission standard will be set for ammonia for the thermal oxidiser based on the monitoring results. If no ammonia is detected in the flue gas during the decommissioning stage, the monitoring of ammonia in the flue gas of the thermal oxidiser could be discontinued.	Ensure the gaseous emission from the project meets the air quality requirement	At the thermal oxidizer stack during commissioning . If ammonia is detected during commissioning stage, the monitoring will continue.	SENTX Contractor	✓	Emission Limits determined during commissioning stage	Implemented
4.10.2 and SENTX latest design	AQ45	Odour patrol in accordance with requirements stated in Table 3.7a of the EM&A Manual.	Ensure the odour emission from the project meets the odour requirement	Along SENTX Site boundary	SENTX Contractor	✓	EIAO-TM Annex 4	Implemented
4.10.2	AQ46	Monitoring of meteorological station, continuously	Collect site specific meteorological data	At meteorological station shown in Figure 11.3a	SENTX Contractor	✓ ✓	-	Implemented

#### Noise – Construction Phase

5.7.1	N1	Adopt good site practice listed below: <ul style="list-style-type: none"> <li>Only well-maintained plant will be</li> </ul>	To minimise potential construction	All construction	SENTX Contractor	✓	Noise Control Ordinance (NCO) and	Implemented
-------	----	---	------------------------------------	------------------	------------------	---	-----------------------------------	-------------

EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
				operated on-site and plant should be serviced regularly during the construction program;	noise nuisance. works area			<i>EIAO-TM Annex 5</i>	
			<ul style="list-style-type: none"> <li>Silencers or mufflers on construction equipment should be utilized and will be properly maintained during the construction program;</li> <li>Mobile plant, if any, will be sited as far from NSRs as possible;</li> <li>Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or should be throttled down to a minimum;</li> <li>Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and</li> <li>Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities.</li> </ul>						
5.8	N2	Weekly noise monitoring		Ensure noise generated from the project meets the criteria	At monitoring locations shown in <i>Figure 6.4a</i>	SENTX Contractor	✓	<i>Noise Control Ordinance (NCO) and EIAO-TM Annex 5</i>	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
<b>Noise – Operation/Restoration Phase</b>								
5.7.2	N3	Adopt good site practice listed below: <ul style="list-style-type: none"> <li>Choose quieter PME;</li> <li>Include noise levels specification when ordering new plant items;</li> <li>Locate fixed plant items or noise emission points away from the NSRs as far as practicable;</li> <li>Locate noisy machines in completely enclosed plant rooms or buildings; and</li> <li>Develop and implement a regularly scheduled plant maintenance programme so that plant items are properly operated and serviced. The programme should be implemented by properly trained personnel.</li> </ul>	To minimise potential operational noise nuisance.	Within the SENTX Site	SENTX Contractor	✓	Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented
								Implemented
								Implemented
								Implemented
								Implemented
								Implemented
5.8	N4	Weekly noise monitoring	Ensure noise generated from the project meets the criteria	At monitoring locations shown in Figure 6.4a	SENTX Contractor	✓	Noise Control Ordinance (NCO) and EIAO-TM Annex 5	Implemented
<b>Water Quality – Construction Phase</b>								
6.8.1	WQ1	<u>Construction Runoff</u> <ul style="list-style-type: none"> <li>Exposed soil areas will be minimised to</li> </ul>	To minimise	All	SENTX	✓	ProPECC PN 1/94	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? <sup>(1)</sup> D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		reduce the contamination of runoff and erosion.	potential water quality impacts arising from the construction works	construction works area	Contractor		EIAO-TM Annex 6	
6.8.1	WQ2	<ul style="list-style-type: none"> <li>Perimeter channels will be constructed in advance of site formation works and earthworks and intercepting channels will be provided for example along the edge of excavation.</li> </ul>	To minimise potential water quality impacts arising from the construction works	All construction works area	SENTX Contractor	✓	ProPECC PN 1/94 Water Pollution Control Ordinance (WPCO) EIAO-TM Annex 6	Reminder was given to the Contractor
6.8.1	WQ3	<ul style="list-style-type: none"> <li>Silt removal facilities, channels and manholes will be maintained and the deposited silt and grit should be removed regularly to ensure they are functioning properly at all times.</li> </ul>	To minimise potential water quality impacts arising from the construction works	All construction works area	SENTX Contractor	✓	ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Deficiency of mitigation measures but rectified by the Contractor
6.8.1	WQ4	<ul style="list-style-type: none"> <li>Temporary covers such as tarpaulin will also be provided to minimise the generation of high SS runoff.</li> </ul>	To minimise potential water quality impacts arising from the construction works	All construction works area	SENTX Contractor	✓	ProPECC PN 1/94 WPCO	Implemented
6.8.1	WQ5	<ul style="list-style-type: none"> <li>The surface runoff contained any oil and grease will pass through the oil interceptors.</li> </ul>	To minimise potential water quality impacts arising from the construction works	All construction works area	SENTX Contractor	✓	ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Implemented

EIA Ref.	EM&A Ref	Environmental Mitigation Measures/ Protection Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
6.8.1	WQ6	<ul style="list-style-type: none"> <li>All sewer and drains will be sealed to prevent building debris, soil etc from entering public sewers/drains before commencing any demolition works</li> </ul>	To minimise potential water quality impacts arising from the demolition works	Infrastructure area at existing SENT Landfill	SENTX Contractor	✓	ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Not applicable
6.8.1	WQ7	<ul style="list-style-type: none"> <li>During the excavation works for the twin drainage tunnels, the recycle water for cooling the cutter head of the TBM will be conveyed to the sedimentation tanks for treatment and most of the treated water will be reused, where applicable and as much as possible, in the boring operations.</li> </ul>	To minimise potential water quality impacts arising from the tunnel works	Tunnel boring sites	SENTX Contractor	✓	ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Not applicable. Excavation of drainage tunnels is not required in the latest landfill design.
6.8.1	WQ8	<ul style="list-style-type: none"> <li>The fuel and waste lubricant oil from the on-site maintenance of machinery and equipment will be collected by a licensed chemical waste collector.</li> </ul>	To minimise potential water quality impacts arising from improper handling of fuel and oil	SENTX Site	SENTX Contractor	✓	ProPECC PN 1/94 WPCO Waste Disposal Ordinance (WDO)	Implemented
6.8.1	WQ9	<ul style="list-style-type: none"> <li>Implementation of excavation schedules, lining and covering of excavated stockpiles</li> </ul>	To minimise contaminated stormwater runoff from the SENTX Site	All construction works	SENTX Contractor	✓	ProPECC PN 1/94 WPCO EIAO-TM Annex 6	Implemented
6.13	WQ10	<ul style="list-style-type: none"> <li>Monitoring of surface water quality will be conducted on a regular basis as stated in the EM&amp;A Manual.</li> </ul>	To minimise potential water quality impacts on surface water arising from the	SENTX Site	SENTX Contractor	✓	WPCO Water-TM	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
6.8.2	WQ11	<u>Sewage Effluents</u>	construction works					
		<ul style="list-style-type: none"> <li>Sufficient chemical toilets will be provided for the construction workforce.</li> </ul>	To minimise potential water quality impacts arising from the sewage effluents	SENTX Site	SENTX Contractor	✓	WPCO	Implemented
6.8.2	WQ12	<ul style="list-style-type: none"> <li>Untreated sewage will not be allowed to discharge into the surrounding water body.</li> </ul>	To minimise potential water quality impacts arising from the sewage effluents	SENTX Site	SENTX Contractor	✓	WPCO WDO	Deficiency of mitigation measures but rectified by the Contractor
6.8.2	WQ13	<ul style="list-style-type: none"> <li>A licensed waste collector will be employed to clean the chemical toilets on a regular basis.</li> </ul>	To minimise potential water quality impacts arising from the sewage effluents	SENTX Site	SENTX Contractor	✓	WPCO WDO	Implemented

#### *Water Quality – Operation/Restoration and Aftercare Phases*

6.9.1	WQ14	<u>Surface Water Management</u>	<ul style="list-style-type: none"> <li>Inspections of the drainage system, sand traps, settlement ponds and surface water channels will be performed regularly to identify areas necessary for maintenance, cleaning or repair.</li> </ul>	To minimise potential water quality impacts on surface water arising from the landfill operations.	SENTX Site	SENTX Contractor	✓	WPCO Technical Memorandum Standards for Effluents Discharged into Drainage and Sewerage Systems, Inland and Inshore Waters (Water-TM)	Implemented
-------	------	---------------------------------	--	--	------------	------------------	---	--	-------------

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
6.9.1	WQ15	<ul style="list-style-type: none"> <li>Regular maintenance and replacement, if required, of the HDPE liner will be conducted to prevent degradation from affecting the performance of the capping system.</li> </ul>	To minimise potential water quality impacts on surface water arising from the landfill operations.	SENTX Site	SENTX Contractor	✓	<p>EIAO-TM Annex 6</p> <p>WPCO</p> <p>Water-TM</p> <p>EIAO-TM Annex 6</p>	Implemented
6.9.1	WQ16	<ul style="list-style-type: none"> <li>Monitoring of surface water quality will be conducted on a regular basis as stated in the EM&amp;A Manual.</li> </ul>	To minimise potential water quality impacts on surface water arising from the landfill operations.	SENTX Site	SENTX Contractor	✓	<p>WPCO</p> <p>Water-TM</p>	Implemented
6.9.2 and SENTX latest design	WQ17	<p><u>Groundwater Management</u></p> <ul style="list-style-type: none"> <li>The groundwater management facilities including the groundwater monitoring wells will be inspected regularly during routine groundwater monitoring programme.</li> </ul>	To minimise potential water quality impacts on groundwater arising from the landfill operations.	SENTX Site	SENTX Contractor	✓	<p>WPCO</p> <p>Water-TM</p> <p>EIAO-TM Annex 6</p>	Implemented
6.9.2	WQ18	<ul style="list-style-type: none"> <li>Monitoring of groundwater water quality will be conducted on a regular basis as stated in the EM&amp;A Manual.</li> </ul>	To minimise potential water quality impacts on groundwater arising from the	SENTX Site	SENTX Contractor	✓	<p>WPCO</p> <p>Water-TM</p> <p>EIAO-TM Annex 6</p>	Implemented



EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
SENTX latest design	WQ19	<u>Sewage</u> <ul style="list-style-type: none"> <li>All sewage from the operation staff will be diverted to the LTP for treatment or public sewer, if available.</li> </ul>	To ensure proper handling of sewage operations.	SENTX Site	SENTX Contractor	✓	-	Implemented
6.9.3	WQ20	<u>Leachate Management</u> <ul style="list-style-type: none"> <li>The leachate pump houses and related ancillary equipment will be inspected regularly and repairs, if necessary.</li> </ul>	To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate pump houses and related ancillary equipment	SENTX Contractor	✓	WPCO Water-TM EIAO-TM Annex 6	Implemented
6.9.3	WQ21	<ul style="list-style-type: none"> <li>For equipment such as pumps that require routine scheduled maintenance, the maintenance will be performed following manufacturer's recommended frequency.</li> </ul>	To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate pumps	SENTX Contractor	✓	WPCO Water-TM	Implemented
6.9.3	WQ22	<ul style="list-style-type: none"> <li>Preventive maintenance will be implemented so that the possibility for forced shutdown during wet season will be kept to minimal.</li> </ul>	To minimise potential water quality impacts on surrounding water bodies	Leachate treatment plant	SENTX Contractor	✓	WPCO Water-TM EIAO-TM Annex 6	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
6.9.3	WQ23	Emergency procedures or a contingency plan will be established when the LTP is malfunctioned.	arising from the landfill operations. To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate treatment plant	SENTX Contractor	✓	WPCO Water-TM EIAO-TM Annex 6	Implemented
6.9.3 and latest design	WQ24	There will be sufficient redundancy in the system to handle the leachate flow even if one treatment train is down for maintenance. The leachate may be required to temporarily store within the landfill if the leachate storage lagoon are full and leachate cannot be transported to the LTP for treatment.	To minimise potential water quality impacts on surrounding water bodies arising from the landfill operations.	Leachate treatment plant	SENTX Contractor	✓	WPCO Water-TM EIAO-TM Annex 6	Implemented
6.13	WQ25	Monitor the quality of effluent discharged from the LTP	To ensure discharge quality comply with WPCO requirement	Leachate treatment plant discharge point	SENTX Contractor	✓	WPCO Water-TM	Implemented
6.10.1	WQ26	<u>Potential Leakage of Leachate</u> Regular groundwater quality monitoring will be carried out to monitor the performance of the leachate containment system.	To minimise potential water quality impacts on surrounding	SENTX Site	SENTX Contractor	✓	WPCO Water-TM	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
6.10.1	WQ27	<ul style="list-style-type: none"> <li>Maintenance and replacement of the capping system should be carried out, if necessary, to prevent control infiltration and leachate seepage from any damaged cap.</li> </ul>	<p>water bodies arising from the landfill operations.</p> <p>To minimise potential water quality impacts on surrounding water bodies arising from the leachate leakage.</p>	SENTX Site	SENTX Contractor	<p>✓</p> <p>✓</p>	<p>WPCO</p> <p>Water-TM</p> <p>EIAO-TM Annex 6</p>	Implemented
6.10.1	WQ28	<ul style="list-style-type: none"> <li>Maintaining control of the leachate level through extraction</li> </ul>	<p>To minimise potential water quality impacts on surrounding water bodies arising from surface breakout of leachate.</p>	SENTX Site	SENTX Contractor	<p>✓</p> <p>✓</p>	<p>WPCO</p> <p>Water-TM</p> <p>EIAO-TM Annex 6</p>	Implemented
<b>Waste Management – Construction Phase</b>								
7.6.1	WM1	All the necessary waste disposal permits are obtained prior to the commencement of construction work.	To ensure compliance with relevant statutory requirements	Before construction works commence	SENTX Contractor	<p>✓</p> <p>✓</p>	<p>WDO</p>	Implemented
7.6.1	WM2	<u>Management of Waste Disposal</u> The construction contractor will open a billing account with the EPD. Every construction waste or public fill load to be	To ensure that adverse environmental	SENTX Site	SENTX Contractor	<p>✓</p>	<p>WDO</p> <p>Waste Disposal (Charges for Disposal)</p>	Implemented

EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Environmental Protection Measures/	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
							D C O/R A		
		transferred to the Government waste disposal facilities such as public fill reception facilities, sorting facilities, landfills will require a valid "chit" which contains the information of the account holder to facilitate waste transaction recording and billing to the waste producer. A trip-ticket system will also be established to monitor the disposal of construction waste at the SENT Landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the contractor.		impacts are prevented				of Construction Waste) Regulation; Works Bureau Technical Circular No.31/2004; and Annex 5 and Annex 6 of Appendix G of ETWBTC No. 19/2005)	
7.6.1	WM3	Measures for the Reduction of Construction Waste Generation		To reduce construction waste generation	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Implemented
7.6.1	WM4	Chemical Waste					✓	WDO	

EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
				D	C	O/R	A	
		The construction contractor will register as a chemical waste producer with the EPD. Chemical waste will be handled in accordance with the <i>Code of Practice on the Packaging, Handling and Storage of Chemical Wastes</i> .	To ensure proper handling of chemical waste	SENTX Site	SENTX Contractor		<i>Code of Practice on the Packaging, Handling and Storage of Chemical Wastes</i>	Deficiency of mitigation measures but rectified by the Contractor
7.6.1	WM5	<u>Sewage</u> An adequate number of portable toilets will be provided at the site to ensure that sewage from site staff is properly collected. The portable toilets will be desludged and maintained regularly by a specialist contractor.	To ensure proper handling of sewage	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Implemented
7.6.1 and latest design	WM6	<u>General Refuse</u> General refuse will be stored in enclosed bins separately from construction and chemical wastes. The general refuse will be delivered to a transfer station or other landfill, separately from construction and chemical wastes, on a daily basis to reduce odour, pest and litter impacts. Recycling bins will be provided at strategic locations to facilitate recovery of aluminium can and waste paper from the SENTX Site. Materials recovered will be sold for recycling.	To ensure proper handling of general refuse	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Deficiency of mitigation measures but rectified by the Contractor
7.6.1	WM7	<u>Staff Training</u> At the commencement of the construction	To ensure that	SENTX Site	SENTX	✓		Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
			works, training will be provided to workers on the concepts of site cleanliness and on appropriate waste management procedures, including waste reduction, reuse and recycling.		Contractor			
7.8	WM8	<u>Environmental Monitoring &amp; Audit Requirements</u> Weekly audits of the waste management practices will be carried out during the construction phase. The audits examine all aspects of waste management including waste generation, storage, recycling, transport and disposal.	To ensure that adverse environmental impacts are prevented	SENTX Site	SENTX Contractor	✓	WDO	Implemented
<b>Waste Management - Operation/Restoration Phase</b>								
7.6.2 and latest design	WM9	<u>Sludge</u> In case off-site disposal is required, the Contractor will ensure that sludge generated from the LTP will be delivered in closed container to other waste disposal facility e.g. other landfills or a sludge treatment facility, for proper disposal on a daily basis.	To ensure proper handling of sludge	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Implemented
7.6.2	WM10	<u>Chemical Waste</u> The construction contractor will register as a chemical waste producer with the EPD. Chemical waste will be handled in	To ensure proper handling of chemical waste	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
			accordance with the <i>Code of Practice on the Packaging, Handling and Storage of Chemical Wastes</i> .				<i>Code of Practice on the Packaging, Handling and Storage of Chemical Wastes</i>	
7.6.2	WM11	<u>Sewage</u> All sewage from the operation staff will be diverted to the LTP for treatment or public sewer, if available.	To ensure proper handling of sewage	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Moved to mitigation measure under water quality WQ19. It is a measure for water quality rather than waste management.
7.6.2 and latest design	WM12	<u>General Refuse</u> General refuse will be stored in enclosed bins and disposed of at other landfills or transfer station on a daily basis to reduce odour, pest and litter impacts. Recycling bins will be provided at strategic locations to facilitate recovery of aluminium can and waste paper from the SENTX Site. Materials recovered will be sold for recycling.	To ensure proper handling of general refuse	SENTX Site	SENTX Contractor	✓	WDO EIAO-TM Annex 7	Implemented
<b>Landfill Gas Hazards – Design and Construction Phase</b>								
8.6.2 and latest design	LFG1	Precautionary measures to be adopted by the contractors at the Project site and the adjacent development site within the landfill consultation zone are outlined in Paragraphs 8.3 to 8.49 of EPD's <i>Landfill Gas Hazard Assessment Guidance Notes (the Guidance Note)</i> .	To protect workers from landfill gas risk	All construction works area	SENTX Contractor	✓	Paragraphs 8.3 to 8.49 of EPD's <i>Landfill Gas Hazards Assessment Guidance Note</i> EIAO-TM Annex 7	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks	
8.6.2	LFG2	<p>Those precautionary measures applicable to the SENTX will be confirmed in the detailed Qualitative Landfill Gas Hazard Assessment to be submitted by the contractor.</p> <p>Monitoring will be undertaken when construction works are carried out in confined space within the consultation zone with reference to the monitoring requirements and procedures specified in Paragraphs 8.23 to 8.28 of EPD's <i>Guidance Note</i> will be followed.</p> <p>In the event of the trigger levels being exceeded, it is recommended that a person, such as the Safety Officer, is nominated, with deputies, to be responsible for dealing with any emergency which may occur due to landfill gas. In an emergency situation, the nominated person, or his deputies, shall have the necessary authority and shall ensure that the confined space is evacuated and the necessary works implemented for reducing the concentrations of gas. The appropriate organisations shall be contact.</p>	To protect workers from landfill gas risk	Confined space within the construction works area	SENTX Contractor	✓		Implemented	
8.6.3	LFG4	Implementation of engineering measures according to Contract Specification requirements. These measures will include the placement of liner and installation of landfill gas management system to contain, manage and control landfill gas.	To protect workers from landfill gas risk	SENTX Site	SENTX Contractor	✓	✓	✓	EIAO-TM Annex 7 Implemented



EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Environmental Protection Measures/	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
							D C O/R A		
8.6.3	LFG5	Engineering measures to significant engineering measures will be required in the design of the SENTX to protect the staff working in the infrastructure area. These measures include a combination of passive and active systems (examples are recommended in EPD's <i>Guidance Notes</i> ).  Landfill gas monitoring boreholes will be installed at the edge of the waste slope between the waste and the new infrastructure area to monitor the migration of landfill gas, if any.		To protect workers from landfill gas risk	Infrastructure Area	SENTX Contractor	✓	EPD's <i>Landfill Gas Hazards Assessment Guidance Note</i>  EIAO-TM Annex 7	Implemented
<b>Landfill Gas Hazards – Operation, Restoration and Aftercare Phases</b>									
8.6.4	LFG7	To train and ensure staff to take appropriate precautions at all times when entering enclosed spaces or plant rooms. Undertake regular monitoring of landfill gas at the perimeter boreholes to detect if there are any signs of off-site landfill gas migration. Prepare and implement emergency plan in case off-site landfill gas migration is detected.  A permanent gas monitoring system with alarm will be installed and operated in all occupied on-site buildings.		To protect workers from landfill gas risk	SENTX Site	SENTX Contractor	✓	<i>Landfill Gas Hazards Assessment Guidance Note</i>	Implemented
8.7 and latest design	LFG8	<u>Environmental Monitoring &amp; Audit Requirements</u>  Undertake regular monitoring of landfill gas		To protect workers from landfill gas risk	Within the SENTX and along the SENTX	SENTX Contractor	✓		Implemented

EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Environmental Protection Measures/	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
				within the SENTX and along the SENTX boundary as required by the Contract Specification.	boundary			<i>Landfill Gas Hazards Assessment Guidance Note</i>	

### Ecology – Construction Phase

9.10.2	EC1	Measures to control construction runoff:		To minimise potential water quality impacts affecting ecological resources	All construction works area	SENTX Contractor	✓	EIAO-TM Annex 16 ProPECC PN 1/94 Water Pollution Control Ordinance (WPCO) EIAO-TM Annex 6	Implemented
		<ul style="list-style-type: none"> <li>Exposed soil areas will be minimised to reduce the contamination of runoff and erosion;</li> <li>To prevent stormwater runoff from washing across exposed soil surfaces, perimeter channels will be constructed in advance of site formation works and earthworks and intercepting channels will be provided for example along the edge of excavation;</li> <li>Silt removal facilities, channels and manholes will be maintained and the deposited silt and grit will be removed regularly to ensure they are functioning properly at all times;</li> <li>Temporary covers such as tarpaulin will also be provided to minimise the generation of high suspended solids</li> </ul>							<ul style="list-style-type: none"> <li>Deficiency of mitigation measures but rectified by the Contractor</li> <li>Implemented</li> </ul>

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1) D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		runoff;						
		<ul style="list-style-type: none"> <li>The surface runoff contained any oil and grease will pass through the oil interceptors; and,</li> <li>Control measures, including implementation of excavation schedules, lining and covering of excavated stockpiles will be implemented to minimise contaminated stormwater run-off from the SENTX site.</li> </ul>						Implemented
9.10.2 and SENTX latest design	EC2	<p><u>Good Construction Practice:</u></p> <ul style="list-style-type: none"> <li>Fences along the boundary of the SENTX Site will be erected before the commencement of works to prevent vehicle movements, and encroachment of personnel, onto adjacent areas.</li> <li>The work site boundaries will be regularly checked to ensure that they are not breached and that damage does not occur to surrounding areas.</li> </ul>	To minimise potential ecological impacts arising from the Project	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 16	Implemented
<b>Ecology – Operation, Restoration and Aftercare Phases</b>								
9.10.2	EC3	<p><u>Measures for Controlling Leakage of Landfill Leachate</u></p> <p>Leachate will be contained within the SENTX Site by the proposed impermeable leachate containment system and collected by the</p>	To minimise potential water quality impact affecting the	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 16 WPCO Water-TM	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
9.10.2	EC4	<p>installation of drainage system to prevent potential migration of leachate to habitats in the vicinity.</p> <p><u>Measures for Controlling Migration of Landfill Gas</u></p> <p>Disturbance to habitat in the vicinity and associated wildlife due to migration of landfill gas will be prevented by proper management of the landfill gas generated from the SENTX. Ignition fires will be prohibited to occur within the boundary of the SENTX Site. Surface emission and off-site migration of landfill gas will be regularly monitored.</p>	<p>ecological resources</p> <p>To minimise potential landfill gas migration affecting ecological resources</p>	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 6	Implemented
9.10.3 and SENTX latest design	EC5	<p>The following compensation planting is recommended as the mitigation measures for the habitat affected due to the SENTX:</p> <ul style="list-style-type: none"> <li>Provision of 6 ha of mixed woodland planting to compensate the loss of shrubland; and</li> <li>Provision of a mosaic of grassland and shrubland in the remaining areas of the SENTX Site.</li> </ul> <p>Compensatory planting and restoration of the SENTX can be implemented progressively according to the filling plan of SENTX.</p>	<p>Compensation of habitat loss due to the Project</p>	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 16	Implemented
9.10.3	EC6	<p>The mixture of grassland, shrubland and woodland habitats are recommended to diversify the habitats for supporting various wildlife in particular butterflies, birds and</p>	<p>To diversify habitats</p>	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 16	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
9.10.3	EC7	herpetofauna and blend into the existing undisturbed ecological environment. Indigenous plant species of shallow root system, softwood in nature and adaptive to sea shore habitat are recommended to be used in the restoration plan, which can establish well in coastal area with exposure to strong wind and salt spray, with sand soil base. Taking consideration of the relative poor substrate and the difficulties of establishment of some native trees in Hong Kong, it is recommended to include approximately 20% of non-native tree species in the compensatory woodland. The non-native tree species can serve as a nurse species to facilitate the establishment of the native tree species, especially the shading, and it can be replaced by established native tree species progressively. Plant species can also make reference to food plants of butterfly species (in particularly butterfly species of conservation interests recorded within the CWBCP).	To enhance ecological value of the habitats	SENTX Site	SENTX Contractor	✓	✓	EIAO-TM Annex 16 Implemented
9.10.3	EC8	It is also recommended that a trial nursery for native plant species be set up to fine tune the planting matrix and management intensity of the recommended indigenous tree species for the restoration of the SENTX. It should be noted that native shrubs and tree species had been used for restoration of the existing SENTX Landfill, native plant species that could not	To select the most suitable indigenous tree species for the SENTX	SENTX Site	SENTX Contractor	✓	✓	EIAO-TM Annex 16 Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
		successfully be established on the existing SENT Landfill should be reviewed before the preparation of the compensatory planting list. Special care and intensive management of native plant should be implemented in order to ensure proper establishment of the native plants.						
9.12.1	EC9	<u>Environmental Monitoring &amp; Audit Requirements</u> The implementation of the ecological mitigation measures should be checked as part of the environmental monitoring and audit procedures during the construction period.	To ensure that adverse ecological impacts are prevented	SENTX	SENTX Contractor	✓	EIAO-TM Annex 16	Implemented
<b>Landscape and Visual – Construction Phase</b>								
10.6.5	LV1	CM1 - The construction area and area allowed for the contractor's office, leachate treatment plant and laboratory areas will be minimised to a practical minimum, to avoid impacts on adjacent landscape.	To minimise the landscape and visual impacts	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 18 and ETWBC 3/2006	Implemented
10.6.5	LV2	CM2 - Topsoil, where identified, will be stripped and stored for re-use in the construction of the soft landscape works, where practical. The Contract Specification will include storage and reuse of topsoil as appropriate.	To minimise the landscape and visual impacts	All construction works area	SENTX Contractor	✓	EIAO-TM Annex 18	Not applicable
10.6.5	LV3	CM3 - All existing trees at the edges of the landfill will be carefully protected during	To minimise the landscape and	Potential impacted area	SENTX Contractor	✓	EIAO-TM Annex 18 and ETWBC 3/2006	Not applicable

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
						D C O/R A		
		construction. Detailed Tree Protection Specification will be provided in the Contract Specification. Under this Specification, the Contractor will be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in Contractor's works areas.	visual impacts					
10.6.5	LV4	CM4 - Trees unavoidably affected by the works will be transplanted, where necessary and practical. A detailed Tree Transplanting Specification will be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods will be allowed in the project programme.	To minimise the landscape and visual impacts	Potential impacted area	SENTX Contractor	✓	EIAO-TM Annex 18 and ETWBC 3/2006	Implemented
10.6.5 and latest design	LV5	CM5 - Within 3 months of taking possession of the SENTX Site, the Contractor will plant advance screen planting of native species at Light Standard size at 1.5m centres along the High Junk Peak Trail so as to screen views of the Works from the trail. Tree planting locations will be agreed with AFCD. Works will be completed within 9 months of taking possession of the SENTX Site.	To minimise the landscape and visual impacts	At High Junk Peak Hiking Trail	SENTX Contractor	✓	EIAO-TM Annex 18	Implemented
10.6.5	LV6	CM6 - The Contractor's office, leachate treatment plant and laboratory will be given an aesthetic treatment in earth tones to reduce their visual impact and albedo and blend	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	✓	EIAO-TM Annex 18	Implemented

EIA Ref.	EM&A Ref	Environmental Protection Measures/ Mitigation Measures	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? D C O/R A	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
10.6.5	LV7	them into the surrounding landscape. CM7 - The Contractor's office, leachate treatment plant and laboratory will be surrounded by a minimum of 5m wide and 0.75m high earth bund on the west and south sides planted with a dense screen of tree and shrub vegetation. Additional tree planting will be provided in unused spaces with thin infrastructure site, along access roads and in and around car parks. This will be supplemented with shrub planting, where appropriate.	To minimise the landscape and visual impacts	Infrastructure area	SENTX Contractor	✓	EIAO-TM Annex 18 and ETWBC 7/2002	Not applicable
10.6.5	LV8	CM8 - Planting trials will be carried out in an on-site nursery prior to implementation of the first phase of restoration to establish the best planting matrix and management intensity of the recommended plant materials for the restoration.	To minimise the landscape and visual impacts	SENTX Site	SENTX Contractor	✓	EIAO-TM Annex 18	Implemented
11.4.1	LV9	During the preparation of the detailed landscape design plan, the design submission will be audited against the recommendation proposed in the ER Report by the Registered Landscape Architect from the ET.	To ensure the implementation of mitigation measures proposed in this EIA Report	SENTX Site	SENTX Contractor/ET	✓	EIAO-TM Annex 18	Implemented

**Landscape and Visual – Operation/Restoration Phase**

10.6.5	LV10	OM1 - Landfill materials will be covered with general fill material or tarpaulin sheet on a daily basis to reduce visual impact.	To minimise the landscape and visual impacts	Tipping area	SENTX Contractor	✓	EIAO-TM Annex 18	Implemented
--------	------	--	--	--------------	------------------	---	------------------	-------------



EIA Ref.	EM&A Ref	Environmental Mitigation Measures	Protection Measures/	Objectives of the Recommended Measure & Main Concerns to address	Location of the Measures	Who to implement the measure?	When to implement the measure? (1)	What requirements or standards for the measure to achieve?	Implementation Status and Remarks
latest design									
10.6.5 and SENTX latest design	LV11	OM2 - Filling and restoration will be phased during the course of operations in a minimum of 4 phases, the restoration of each phase to commence immediately on the completion of filling in that phase.		To minimise the landscape and visual impacts	Tipping area	SENTX Contractor	✓	EIAO-TM Annex 18	Implemented
10.6.5	LV12	OM3 - Catch fences will be erected at the perimeter of the waste boundary, to ensure that all waste stays within the site and is not blown into surrounding areas.		To minimise the landscape and visual impacts	Tipping area	SENTX Contractor	✓	EIAO-TM Annex 18	Implemented
10.6.5	LV13	OM4 - All night-time lighting will be reduced to a practical minimum both in terms of number of units and lux level and will be hooded and directional.		To minimise the landscape and visual impacts	Tipping area	SENTX Contractor	✓	EIAO-TM Annex 18	Implemented
11.4.2 and SENTX latest design	LV14	The condition of the restoration plantation will be audited at monthly intervals by a Registered Landscape Architect from the ET.		To check the restoration plantation	SENTX Site	SENTX Contractor/ET	✓	EIAO-TM Annex 18	Implemented

Annex C

## Monitoring Schedule for This Reporting Period

**South East New Territories (SENT) Landfill Extension  
EM&A Impact Monitoring Schedule during Construction Phase**

October 2021

Sun	Mon	Tue	Wed	Thu	Fri	Sat
					1	2
3 Dust Monitoring	4	5	6	7 Surface Water Monitoring (pm) Noise Monitoring (pm)	8	9
10	11 Dust Monitoring	12	13	14 Surface Water Monitoring (pm) Noise Monitoring (pm) Dust Monitoring	15	16
17	18	19	20	21 Surface Water Monitoring (pm) Noise Monitoring (pm) Dust Monitoring	22	23
24	25	26	27 Dust Monitoring	28 Surface Water Monitoring (pm) Noise Monitoring (pm)	29	30
31						

Note:  
Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

**South East New Territories (SENT) Landfill Extension  
EM&A Impact Monitoring Schedule during Construction Phase (1 - 20 Nov 2021) & Operation/ Restoration Phase (21 - 30 Nov 2021)**

November 2021

Sun	Mon	Tue	Wed	Thu	Fri	Sat
	1	2 Dust Monitoring *	3	4 Surface Water Monitoring Noise Monitoring	5	6
7	8 Dust Monitoring *	9	10	11 Surface Water Monitoring Noise Monitoring	12	13
14 Dust Monitoring *	15	16	17	18 Surface Water Monitoring Noise Monitoring	19	20 Dust Monitoring *
21 Odour Monitoring Leachate Monitoring	22 Odour Monitoring Leachate Monitoring	23 Odour Monitoring Leachate Monitoring	24 Odour Monitoring Leachate Monitoring	25 Odour Monitoring Leachate Monitoring Dust Monitoring Surface Water Monitoring Noise Monitoring	26 Odour Monitoring Leachate Monitoring	27 Odour Monitoring Leachate Monitoring
28 Odour Monitoring Leachate Monitoring	29 Odour Monitoring Leachate Monitoring	30 Odour Monitoring Leachate Monitoring				

Note:

\*Impact dust monitoring will be conducted at two monitoring stations (DM1 and DM2) under the on-going EM&A programme TKO Area 137 Fill Bank and the results will be shared with SENTX.

**South East New Territories (SENT) Landfill Extension  
EM&A Impact Monitoring Schedule during Operation/ Restoration Phase**

December 2021

Sun	Mon	Tue	Wed	Thu	Fri	Sat
			1	2	3	4
Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Dust Monitoring	Odour Monitoring Leachate Monitoring Dust Monitoring Groundwater Monitoring	Odour Monitoring Leachate Monitoring Groundwater Monitoring	Odour Monitoring Leachate Monitoring Noise Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring
5	6	7	8	9	10	11
Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Dust Monitoring Groundwater Monitoring	Odour Monitoring Leachate Monitoring Groundwater Monitoring	Odour Monitoring Leachate Monitoring Noise Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring
12	13	14	15	16	17	18
Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Dust Monitoring	Odour Monitoring Leachate Monitoring Noise Monitoring Perimeter LFG Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Service Void LFG Monitoring	Odour Monitoring Leachate Monitoring Stack Monitoring	Odour Monitoring Leachate Monitoring
19	20	21	22	23	24	25
Odour Monitoring Leachate Monitoring Dust Monitoring	Odour Monitoring Leachate Monitoring Stack Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Noise Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Dust Monitoring
26	27	28	29	30	31	
Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Noise Monitoring Surface Water Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring	Odour Monitoring Leachate Monitoring Dust Monitoring	

Annex D

## Air Quality

Annex D1

## 24-hour TSP Monitoring Results


**Table D1.1 24-hour TSP Monitoring Results at DM1 (During Construction Phase)**

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP ( $\mu\text{g}/\text{m}^3$ )
3 Oct 21	13:00	4 Oct 21	13:00	Rainy	92
11 Oct 21	10:20	12 Oct 21	10:20	Fine	112
15 Oct 21	16:00	16 Oct 21	16:00	Fine	95
21 Oct 21	8:00	22 Oct 21	8:00	Rainy	92
27 Oct 21	13:33	28 Oct 21	13:33	Fine	99
2 Nov 21	13:00	3 Nov 21	13:00	Fine	109
8 Nov 21	8:30	9 Nov 21	8:30	Fine	94
14 Nov 21	13:00	15 Nov 21	13:00	Fine	102
20 Nov 21	8:00	21 Nov 21	8:00	Fine	99
<b>Average</b>					99
<b>Min</b>					92
<b>Max</b>					112

**Note:**

DM1 corresponds to the existing TSP monitoring station TKO-A1 currently operating by CEDD.

**Figure D1.1 Graphical Presentation for 24-hr TSP Monitoring at DM1 (During Construction Phase)**

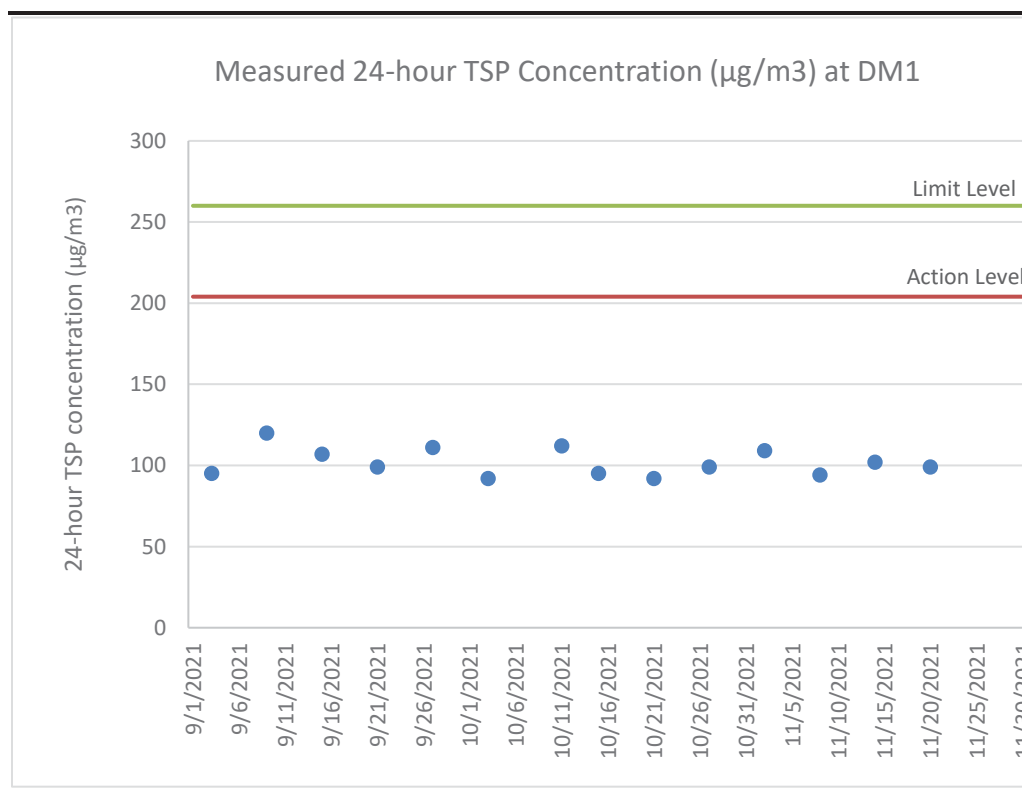




**Table D1.2 24-hour TSP Monitoring Results at DM2 (During Construction Phase)**

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP ( $\mu\text{g}/\text{m}^3$ )
3 Oct 21	13:00	4 Oct 21	13:00	Rainy	87
11 Oct 21	10:30	12 Oct 21	10:30	Fine	104
15 Oct 21	16:00	16 Oct 21	16:00	Fine	90
21 Oct 21	8:00	22 Oct 21	8:00	Rainy	86
27 Oct 21	13:44	28 Oct 21	13:44	Fine	93
2 Nov 21	13:00	3 Nov 21	13:00	Fine	97
8 Nov 21	8:35	9 Nov 21	8:35	Fine	86
14 Nov 21	13:00	15 Nov 21	13:00	Fine	90
20 Nov 21	8:00	21 Nov 21	8:00	Fine	89
<b>Average</b>					91
<b>Min</b>					86
<b>Max</b>					104

**Note:**

DM2 corresponds to the existing TSP monitoring station TKO-A2a currently operating by CEDD.


**Figure D1.2 Graphical Presentation for 24-hr TSP Monitoring at DM2 (During Construction Phase)**

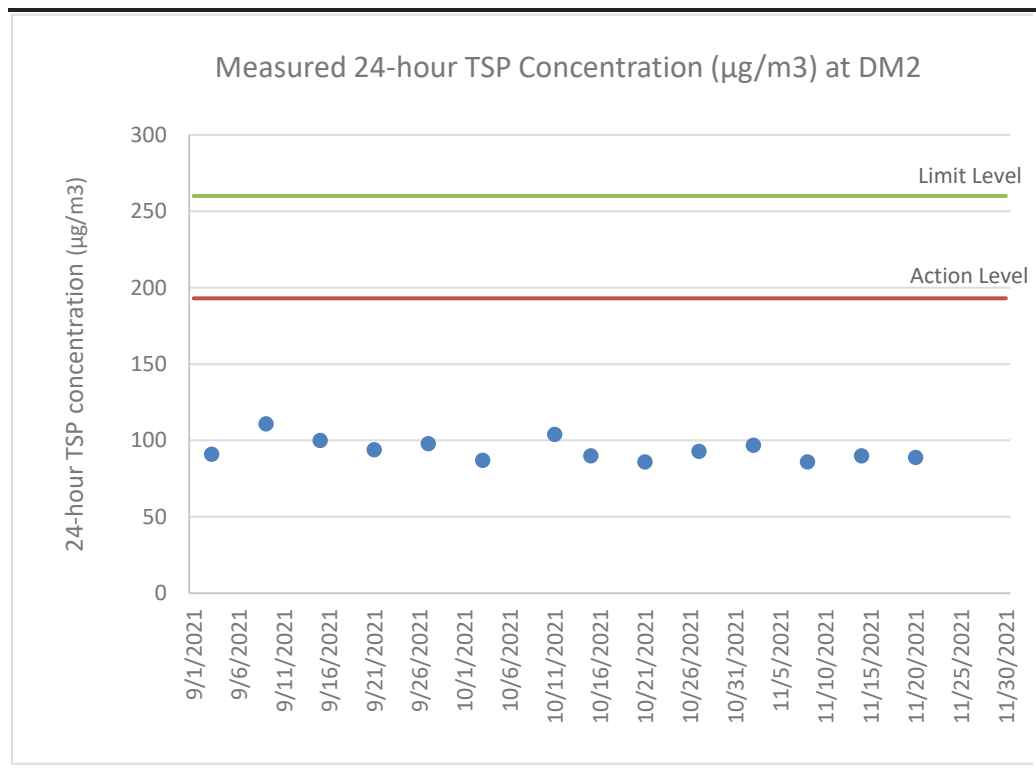

**Table D1.3 24-hour TSP Monitoring Results at AM1 (During Operation Phase)**

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP ( $\mu\text{g}/\text{m}^3$ )
25 Nov 21	9:00	26 Nov 21	9:00	Sunny	100
1 Dec 21	9:00	2 Dec 21	9:00	Sunny	57
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	141
13 Dec 21	9:00	14 Dec 21	9:00	Sunny	173
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	114
25 Dec 21	9:00	26 Dec 21	9:00	Fine	64
31 Dec 21	9:00	1 Jan 22	9:00	Fine	125
<b>Average</b>					111
<b>Min</b>					57
<b>Max</b>					173

**Figure D1.3 Graphical Presentation for 24-hr TSP Monitoring at AM1 (During Operation Phase)**

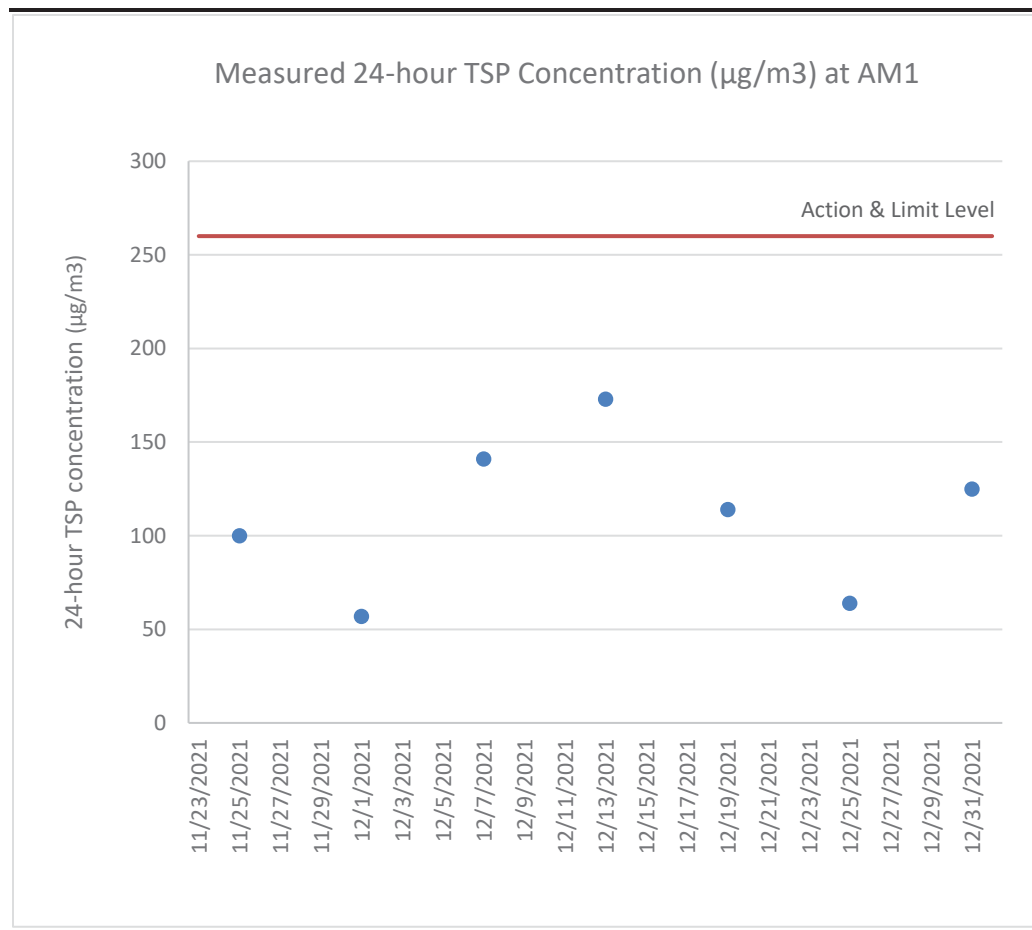


**Table D1.4 24-hour TSP Monitoring Results at AM2 (During Operation Phase)**

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP ( $\mu\text{g}/\text{m}^3$ )
25 Nov 21	9:00	26 Nov 21	9:00	Sunny	154
2 Dec 21*	15:00	3 Dec 21	15:00	Sunny	115
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	156
13 Dec 21	9:00	14 Dec 21	9:00	Sunny	152
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	133
25 Dec 21	9:00	26 Dec 21	9:00	Fine	120
31 Dec 21	9:00	1 Jan 22	9:00	Fine	100
<b>Average</b>					133
<b>Min</b>					100
<b>Max</b>					156

Notes:

\* Sampling was suspended due to equipment failure.


**Figure D1.4 Graphical Presentation for 24-hr TSP Monitoring at AM2 (During Operation Phase)**

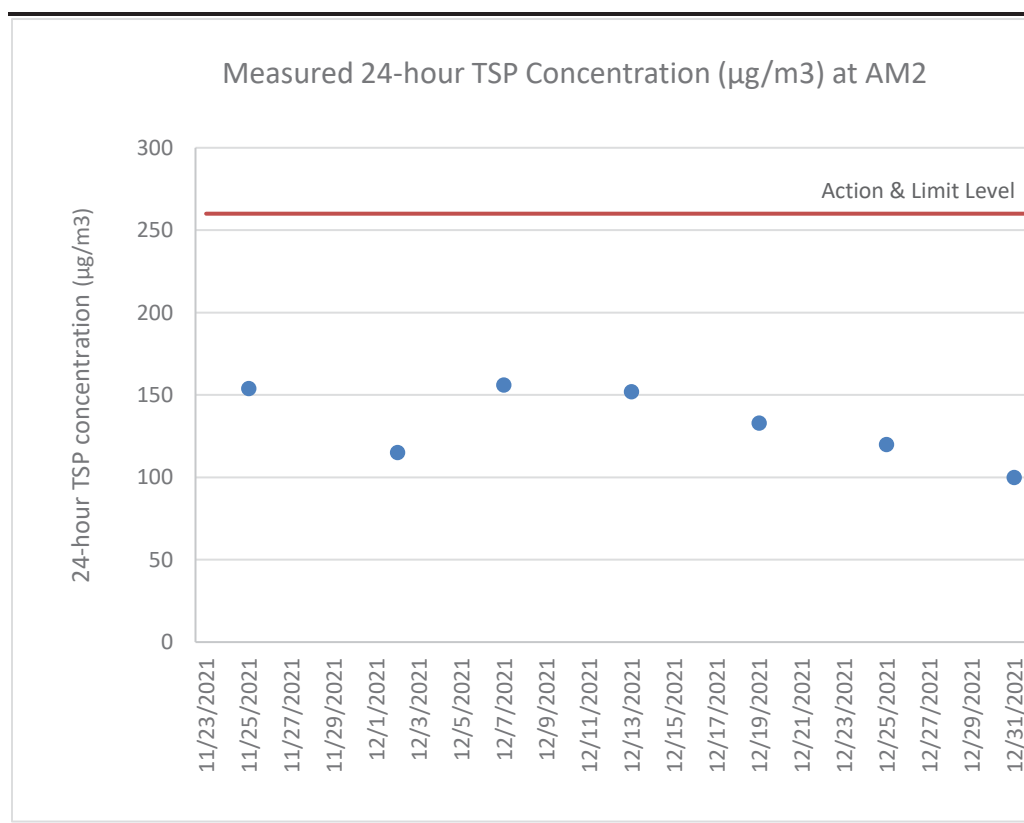

**Table D1.5 24-hour TSP Monitoring Results at AM3 (During Operation Phase)**

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP ( $\mu\text{g}/\text{m}^3$ )
25 Nov 21	16:30	26 Nov 21	16:30	Sunny	158
1 Dec 21	9:00	2 Dec 21	9:00	Sunny	128
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	169
13 Dec 21	8:05	14 Dec 21	8:05	Sunny	258
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	191
25 Dec 21	9:00	26 Dec 21	9:00	Fine	189
31 Dec 21	14:25	1 Jan 22	14:25	Fine	155
<b>Average</b>					178
<b>Min</b>					128
<b>Max</b>					258


**Figure D1.5 Graphical Presentation for 24-hr TSP Monitoring at AM3 (During Operation Phase)**

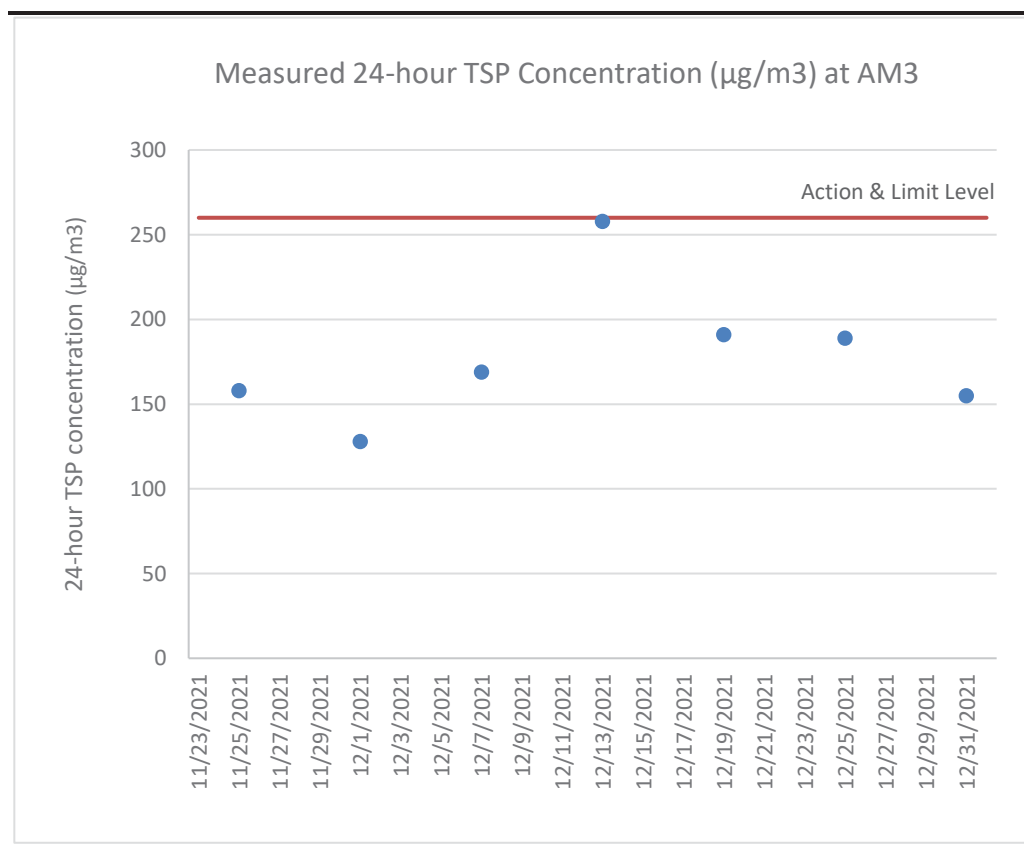

**Table D1.6 24-hour TSP Monitoring Results at AM4 (During Operation Phase)**

Start Date	Start Time	Finish Date	Finish Time	Weather	24-hour TSP ( $\mu\text{g}/\text{m}^3$ )
25 Nov 21	9:00	26 Nov 21	9:00	Sunny	235
1 Dec 21	9:00	2 Dec 21	9:00	Sunny	206
7 Dec 21	9:00	8 Dec 21	9:00	Sunny	164
13 Dec 21	9:00	14 Dec 21	9:00	Sunny	282
19 Dec 21	9:00	20 Dec 21	9:00	Sunny	129
25 Dec 21	9:00	26 Dec 21	9:00	Fine	102
31 Dec 21	9:00	1 Jan 22	9:00	Fine	125
<b>Average</b>					178
<b>Min</b>					102
<b>Max</b>					282

**Figure D1.6 Graphical Presentation for 24-hr TSP Monitoring at AM4 (During Operation Phase)**

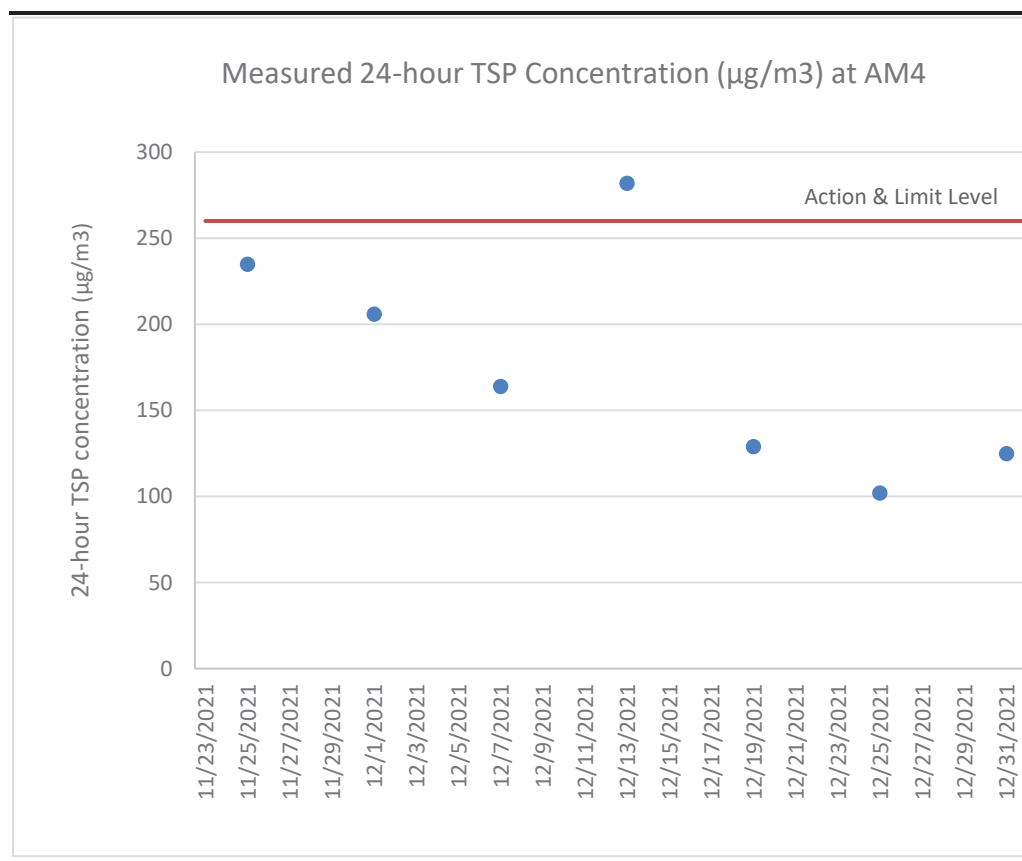

Annex D2

## Event and Action Plan for Air Quality Monitoring

**Annex D2a** *Event and Action Plan for Dust Monitoring During Construction Phase*

Event	Action			Contractor
	ET	IEC	IEC	
<i>Action Level</i> Exceedance for one sample	<ul style="list-style-type: none"> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below action level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> </ul>	<ul style="list-style-type: none"> <li>Rectify any unacceptable practice</li> <li>Amend working methods if appropriate</li> </ul>	
Exceedance for two or more consecutive samples	<ul style="list-style-type: none"> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>If exceedance continues, arrange meeting with Contractor &amp; IEC</li> <li>Continue monitoring at daily intervals if exceedance is due to the Project</li> <li>If no exceedance for 3 consecutive days, cease additional monitoring</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>	

Event	Action			Contractor
	ET	IEC	IEC	
<i>Limit Level</i> Exceedance for one sample	<ul style="list-style-type: none"> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to daily if exceedance is due to the Project and continue until the monitoring results reduce to below limit level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>	
Exceedance for two or more consecutive samples	<ul style="list-style-type: none"> <li>Identify source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD the causes &amp; actions taken for the exceedances</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Continue monitoring at daily intervals if exceedance is due to the Project</li> <li>If no exceedance for 3 consecutive days, cease additional monitoring</li> <li>If exceedance due to the Project continues, consider what portion of the work is responsible and stop that portion of work until the exceedance is abated</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Resubmit proposals if problem still not under control</li> </ul>	



**Annex D2b** *Event and Action Plan for Air Quality Monitoring During Operation/ Restoration Phase*

Event	Action		Contractor
	ET	IEC	
Exceedance of Action/Limit Level for dust monitoring	<ul style="list-style-type: none"> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Assess effectiveness of Contractor's remedial measures and keep the Project Proponent and IEC informed of the results</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to daily and continue until the monitoring results reduce to below action level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>
Exceedance of Action Level for odour	<ul style="list-style-type: none"> <li>Identify source(s) and investigate the cause(s) of exceedance or complaint</li> <li>Prepare the odour complaint form or the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase monitoring frequency to daily until odour not being detected for three consecutive days</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Rectify any unacceptable practice</li> <li>Amend working methods as required</li> <li>Implement amended working methods, if necessary</li> </ul>

Event	Action		
	ET	IEC	Contractor
Exceedance of Limit Level for odour	<ul style="list-style-type: none"> <li>Identify source(s) and investigate the cause(s) of exceedance or complaint</li> <li>Prepare the odour complaint form or the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Assess effectiveness of Contractor's remedial measures and keep the Project Proponent and IEC informed of the results</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operating activities and implementation of odour mitigation measures</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Rectify any unacceptable practice</li> <li>Submit proposals for remedial measures to IEC within 3 working days of notification</li> <li>Implement the agreed proposal or amend working methods as required</li> <li>Resubmit proposals if problem still not under control</li> </ul>
Exceedance of Limit Level for ambient VOCs, ammonia and H <sub>2</sub> S at the monitoring locations	<ul style="list-style-type: none"> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Assess effectiveness of Contractor's remedial measures and keep the Project Proponent and IEC informed of the results</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operating activities and implementation of landfill gas control measures</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Rectify any unacceptable practice</li> <li>Amend working methods as required</li> <li>Implement amended working methods, if necessary</li> </ul>



Event	Action		
	ET	IEC	Contractor
Exceedance of Limit Level of stack emission of the thermal oxidizer, flares and generator	<ul style="list-style-type: none"> <li>Identify source(s) and investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures</li> <li>Ensure remedial measures are properly implemented</li> <li>Assess effectiveness of Contractor's remedial measures and keep the Project Proponent and IEC informed of the results</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to monthly when there are two consecutive exceedances and continue until the monitoring results reduce to below limit level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operating performance of the stack</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Rectify any unacceptable performance</li> <li>Amend design as required</li> <li>Implement amended design, if necessary</li> </ul>



Annex D3



## Meteorological Data


Annex D3 Meteorological Data

Oct 2021

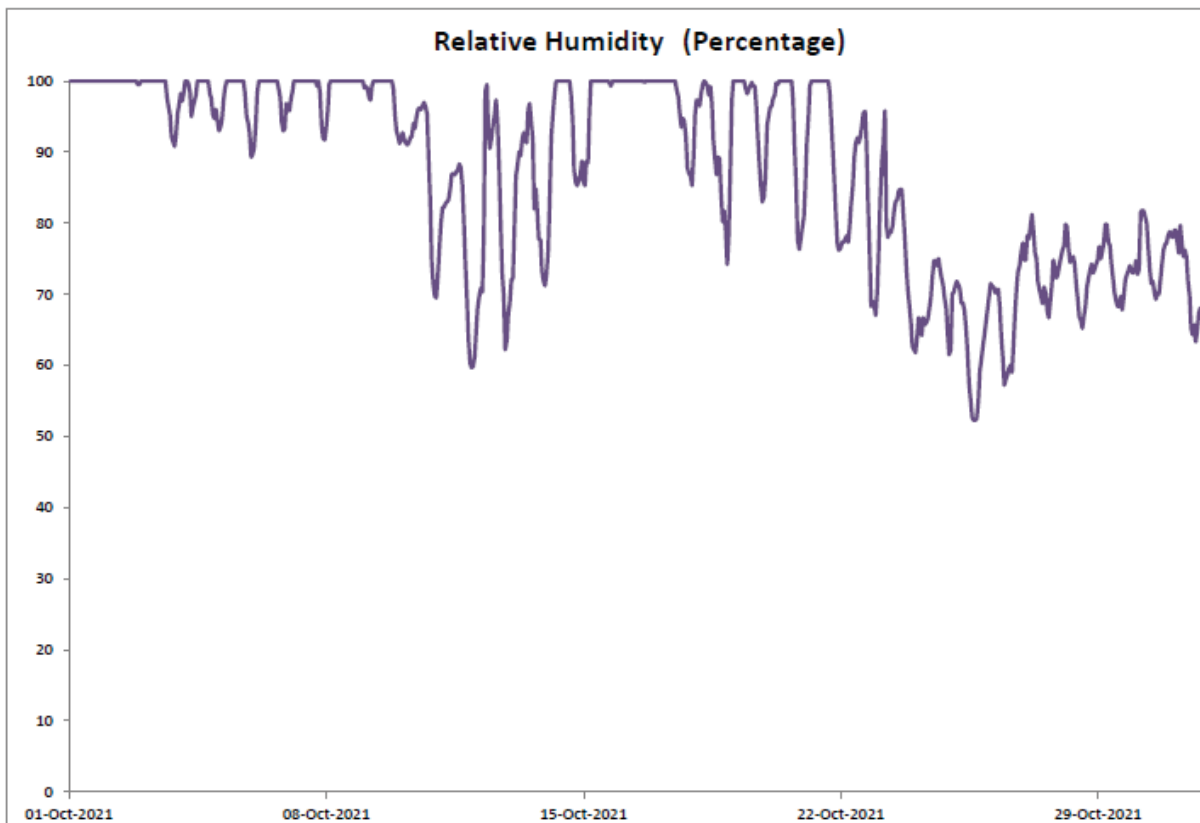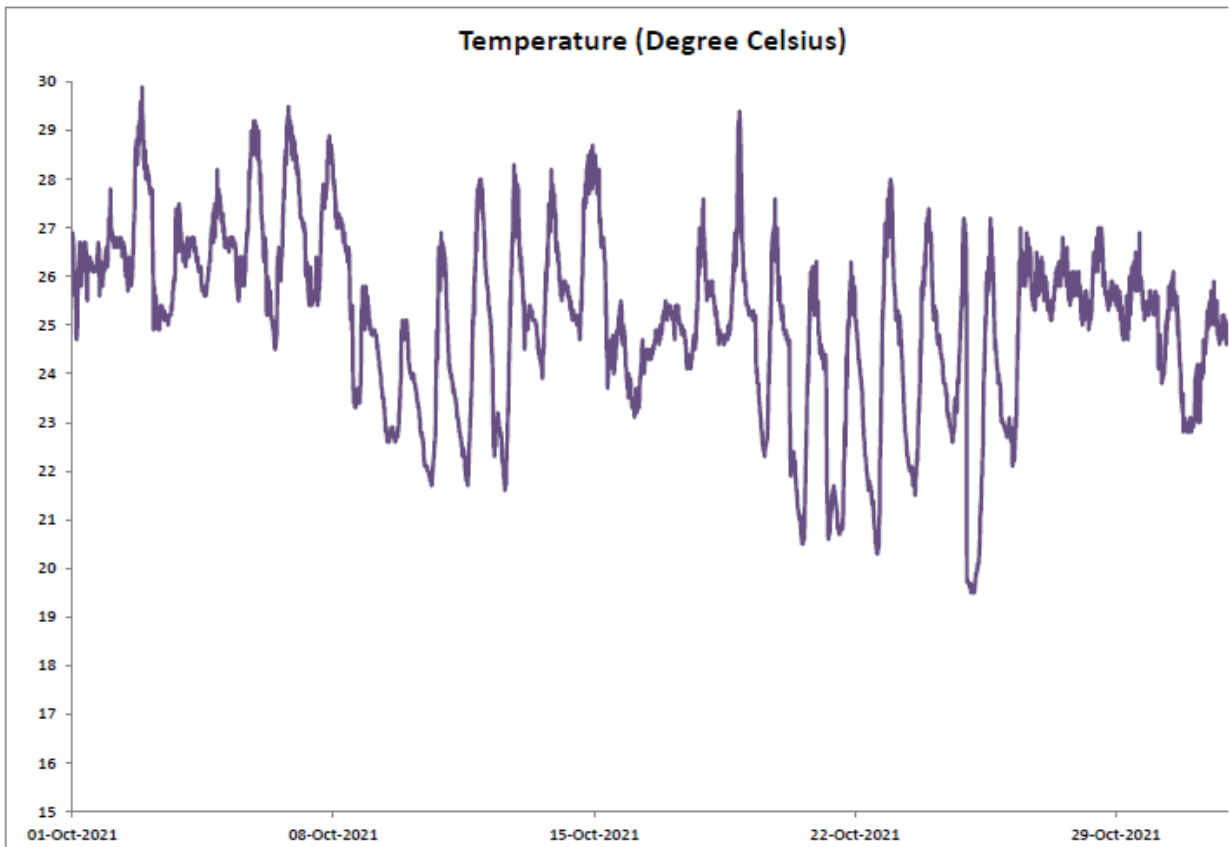


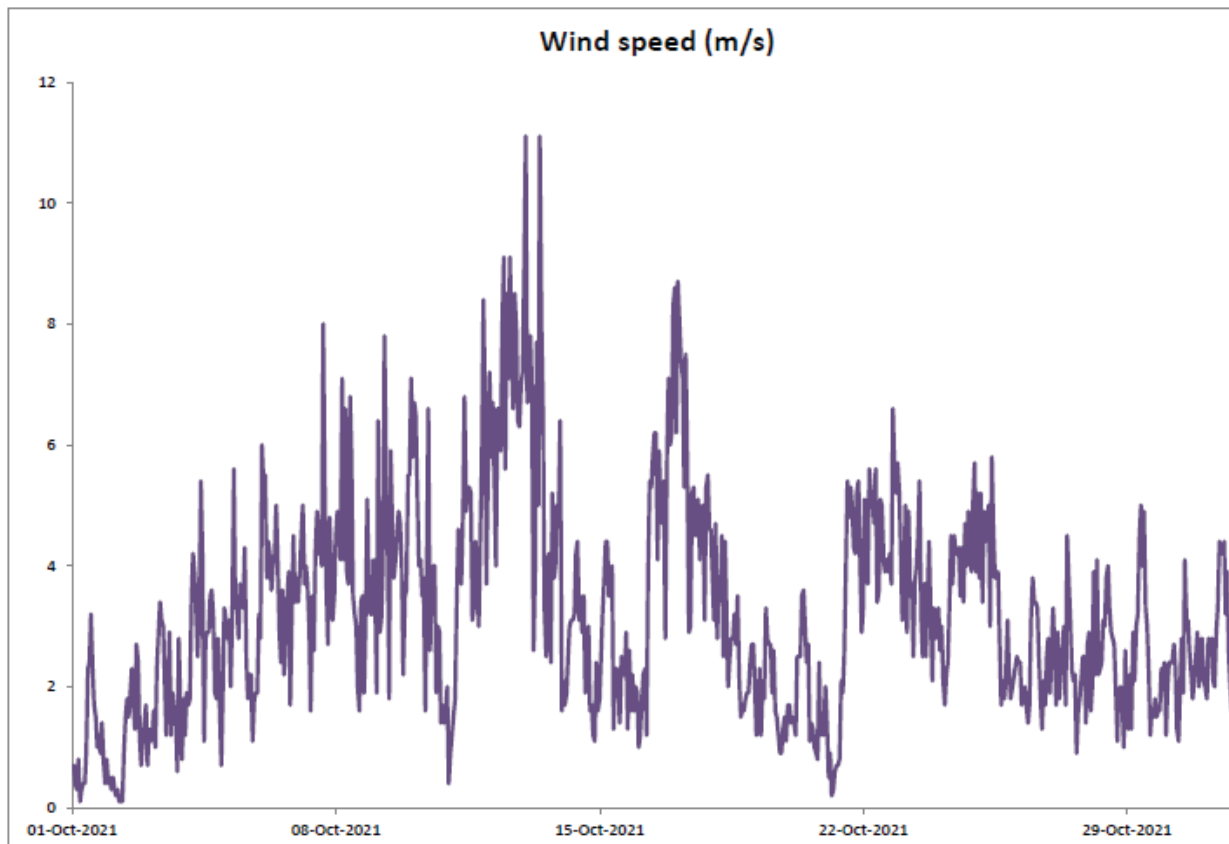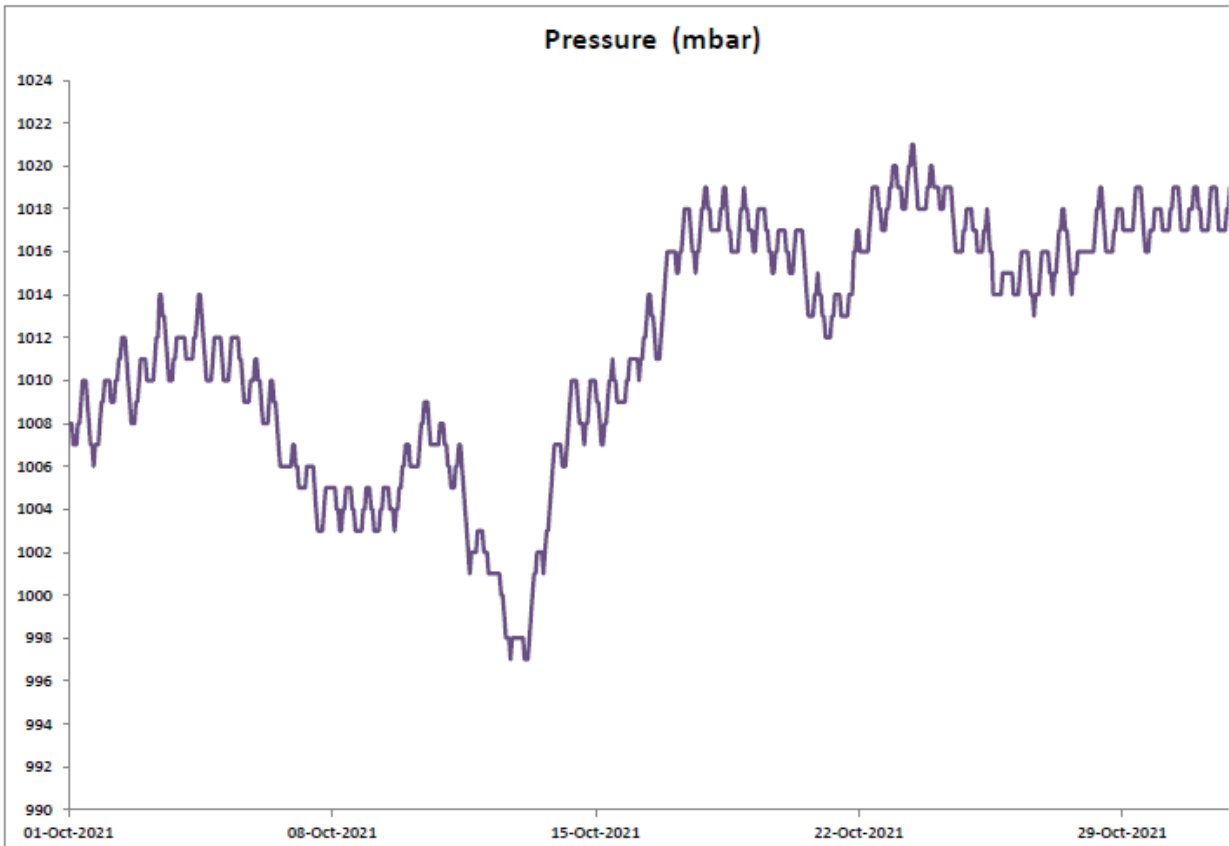

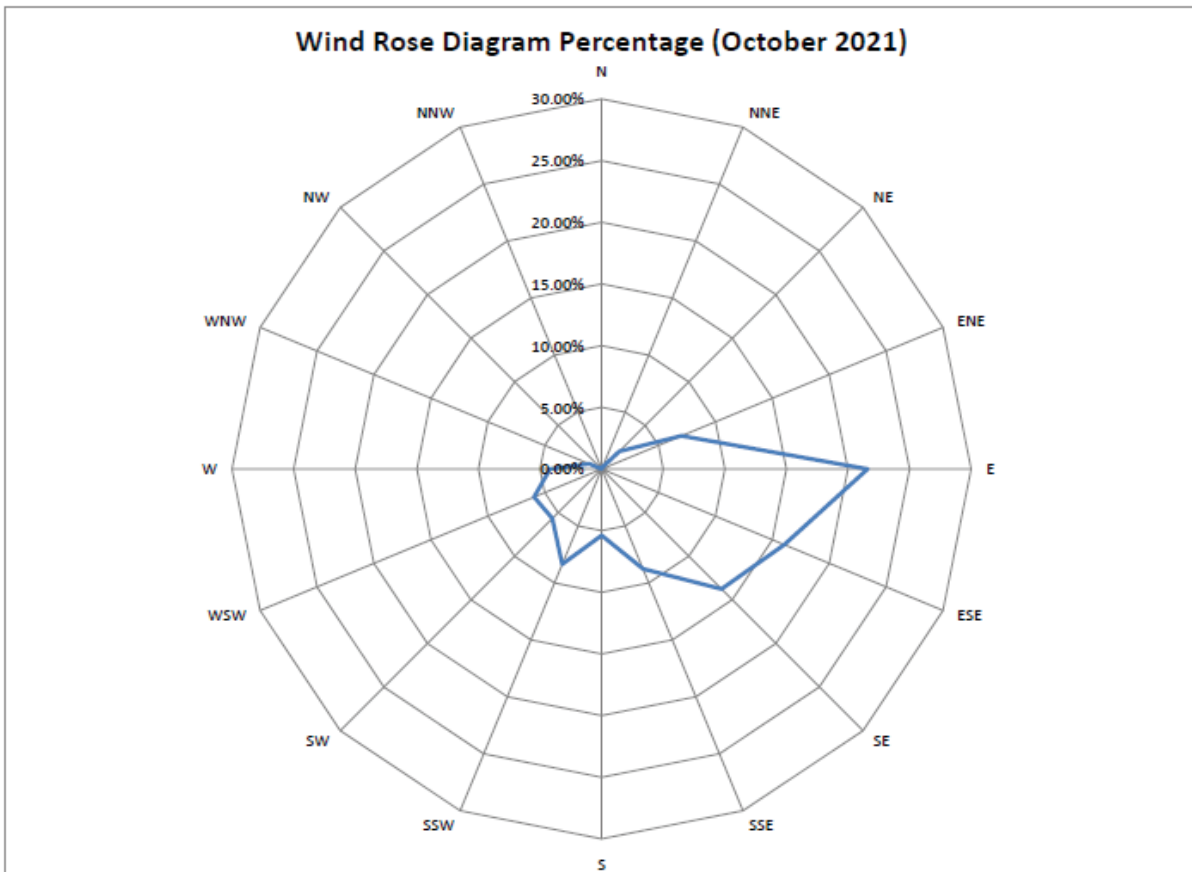
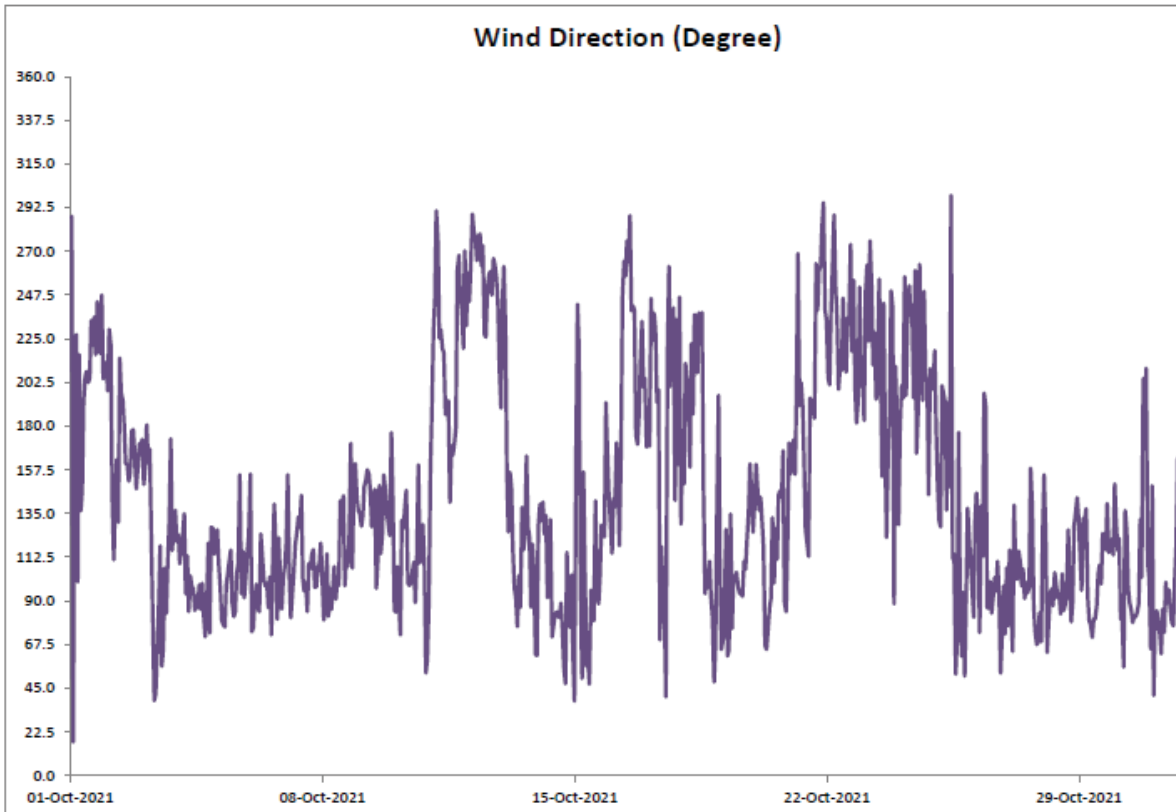


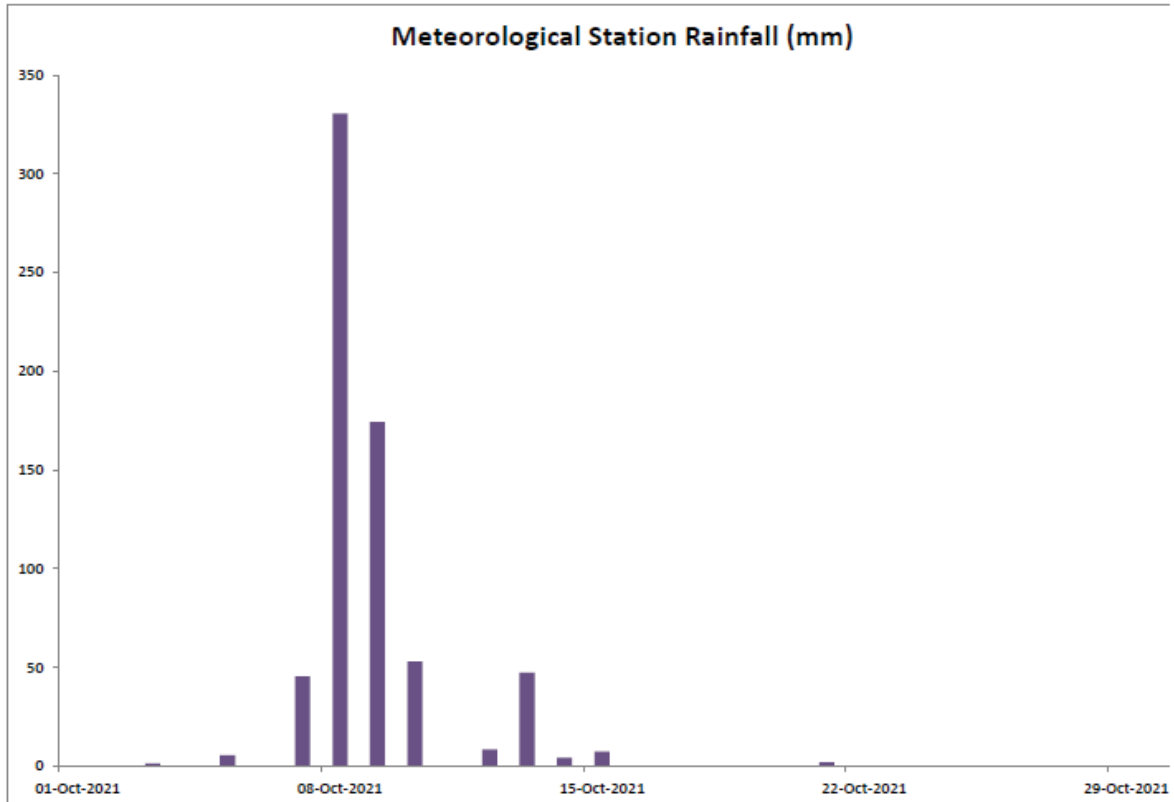



Nov 2021


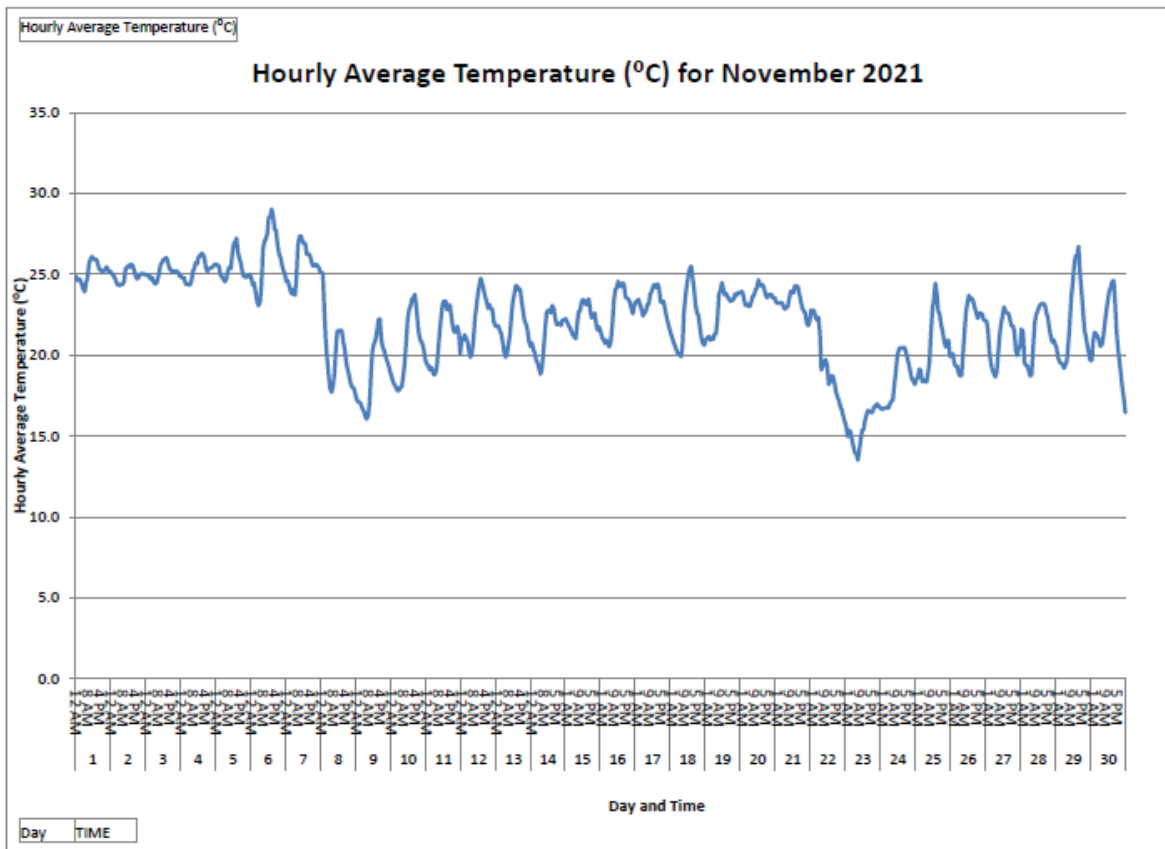






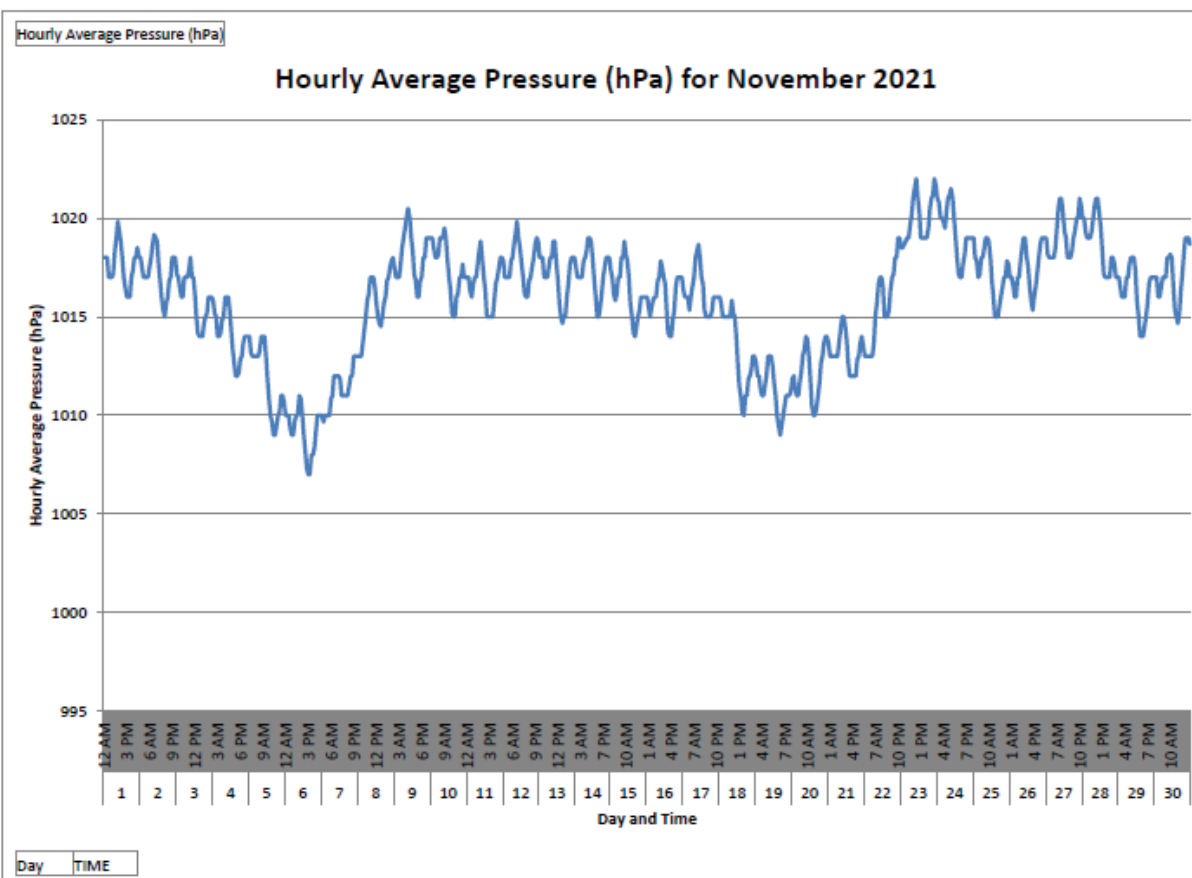
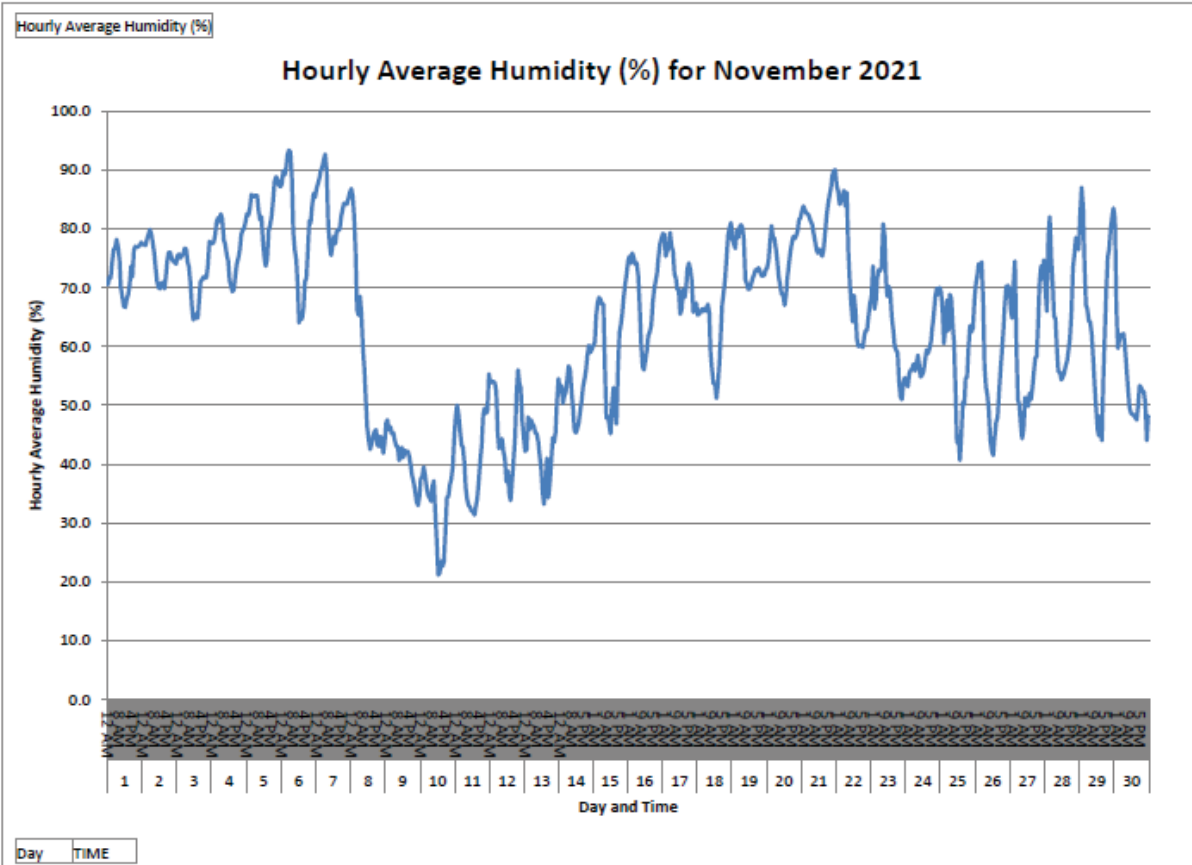





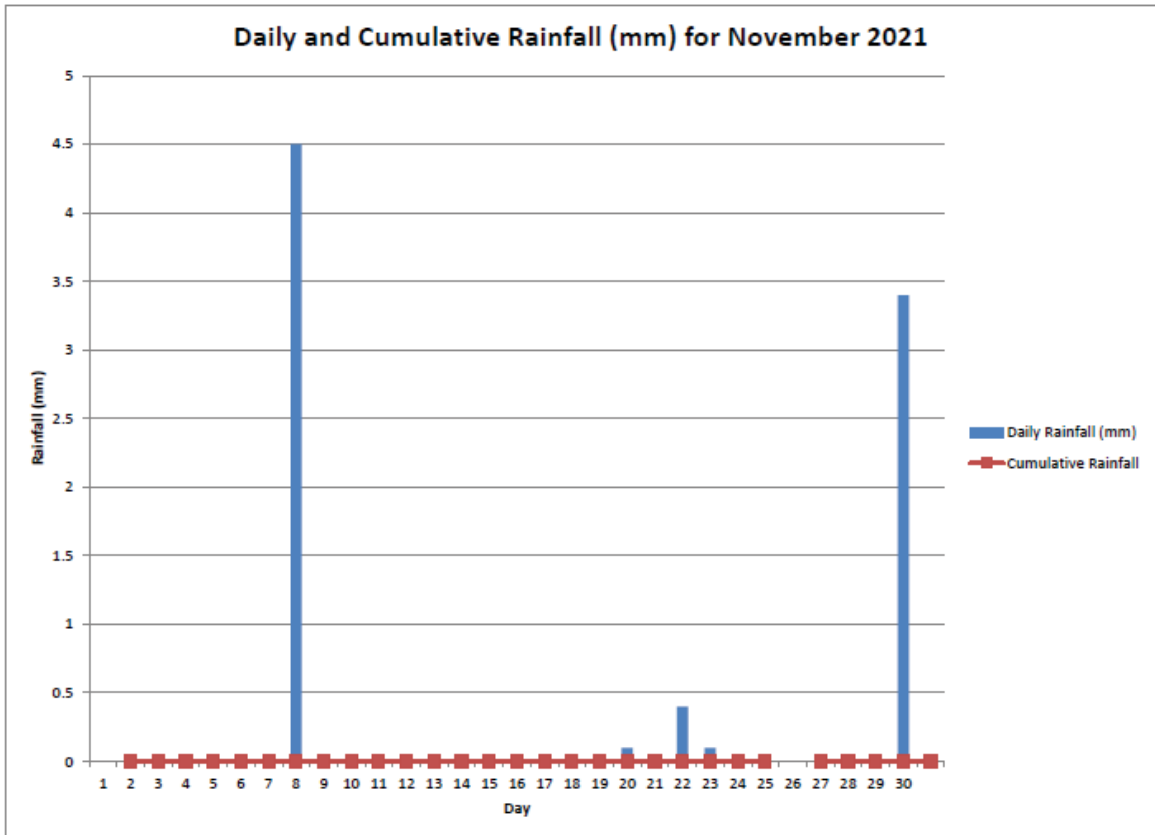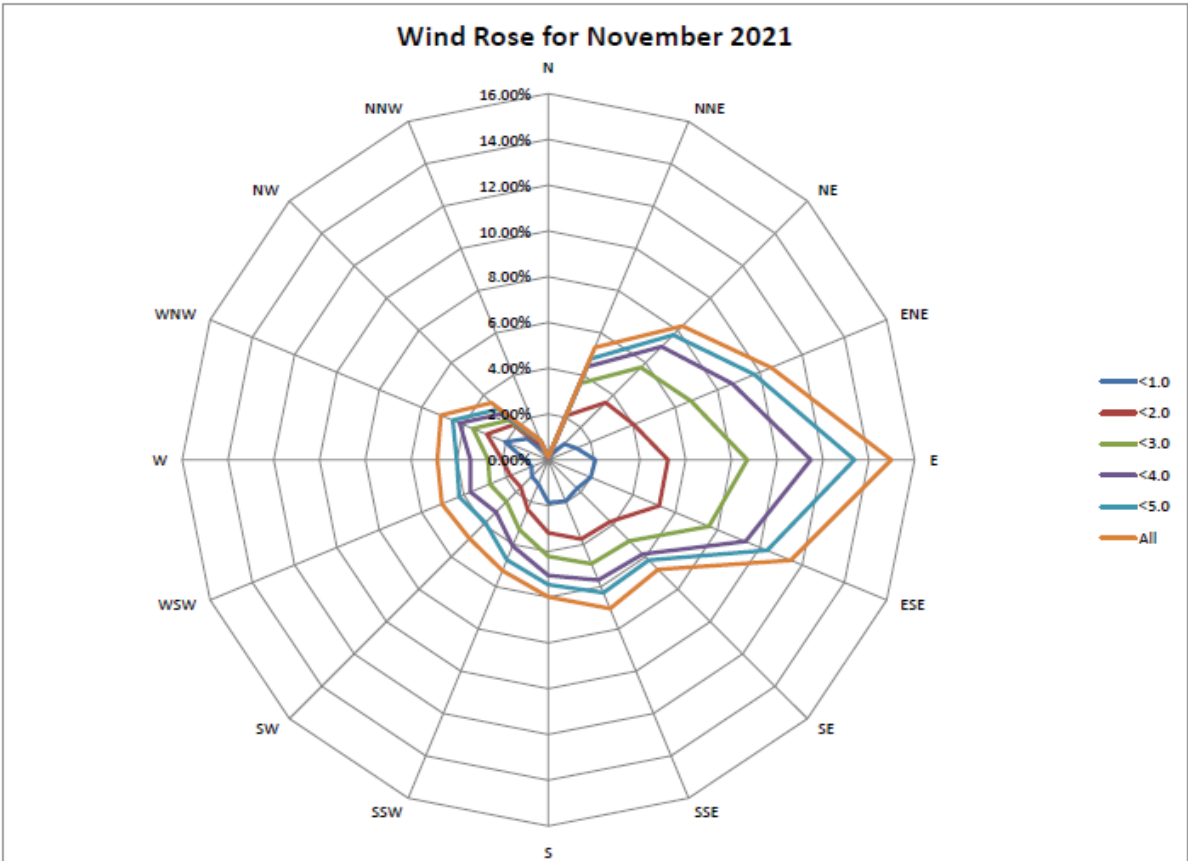

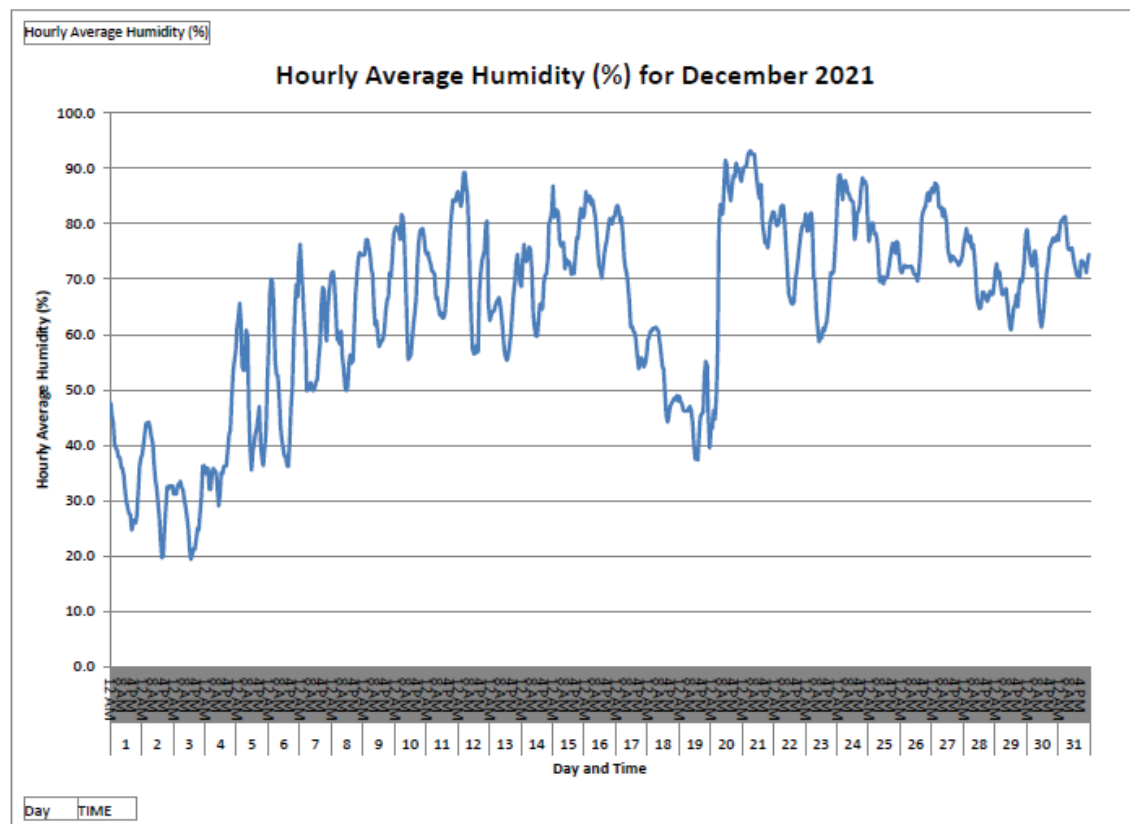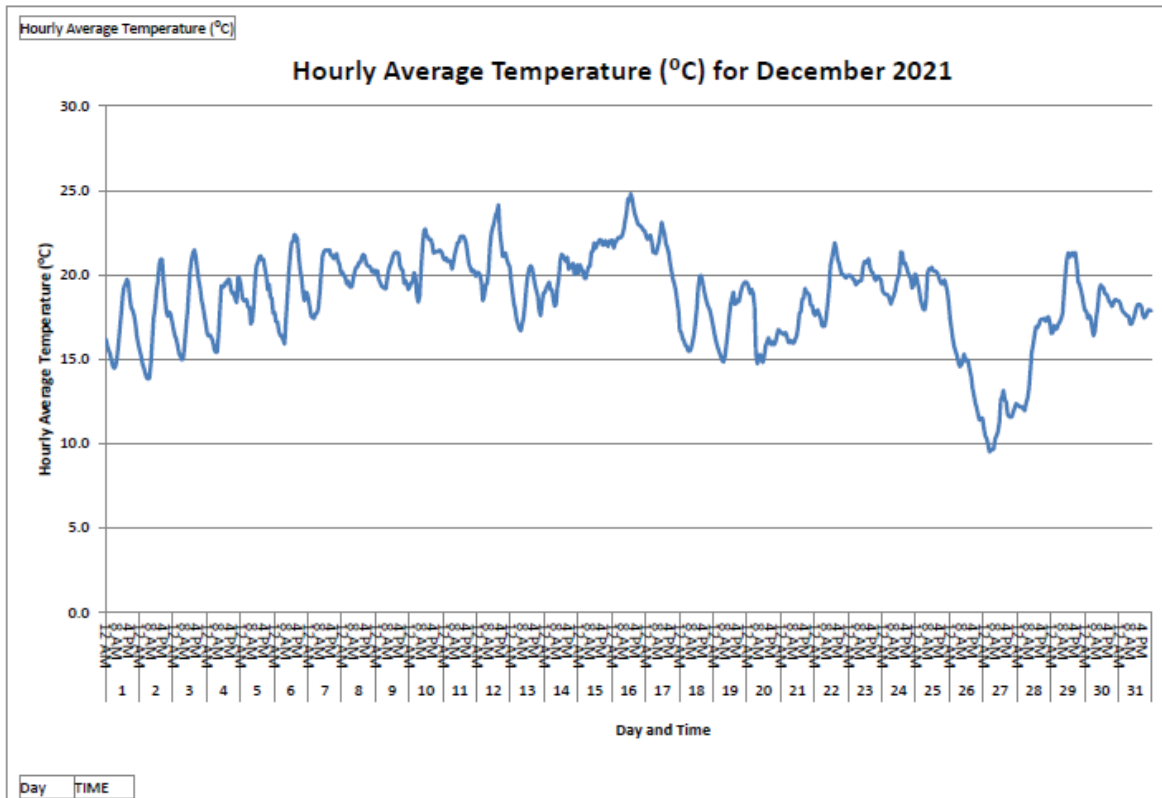

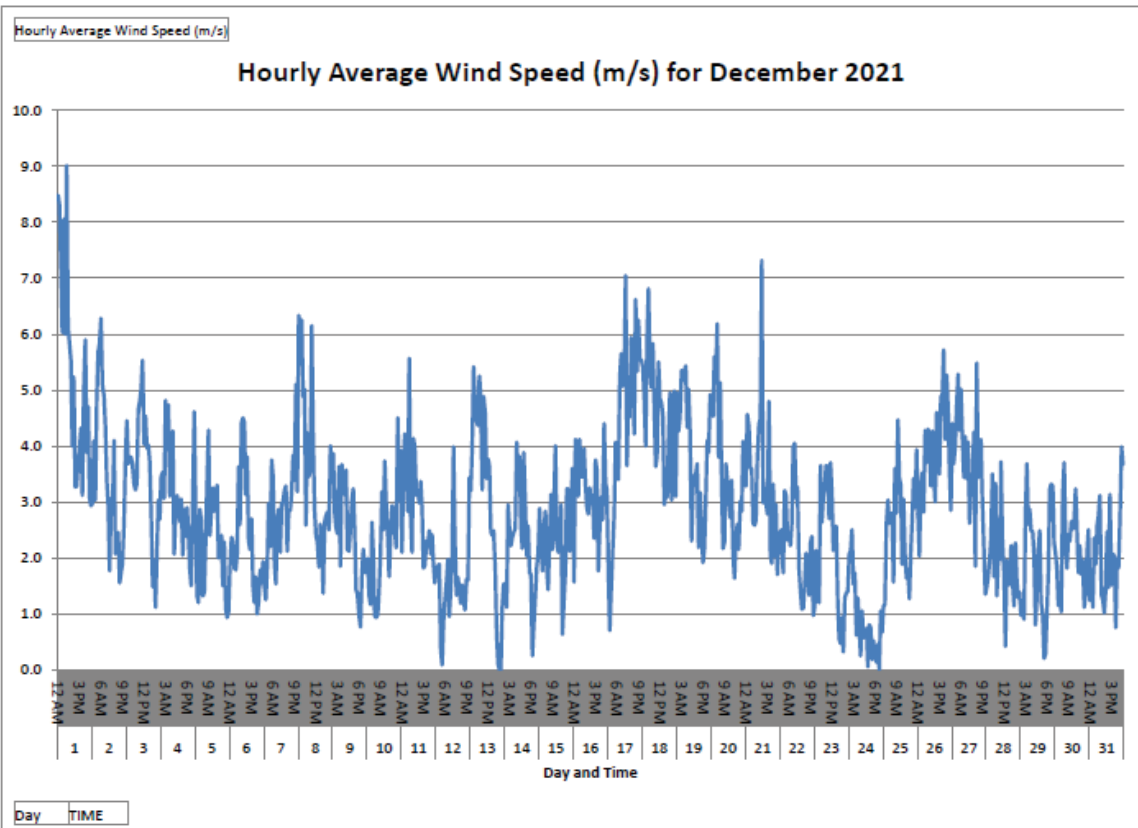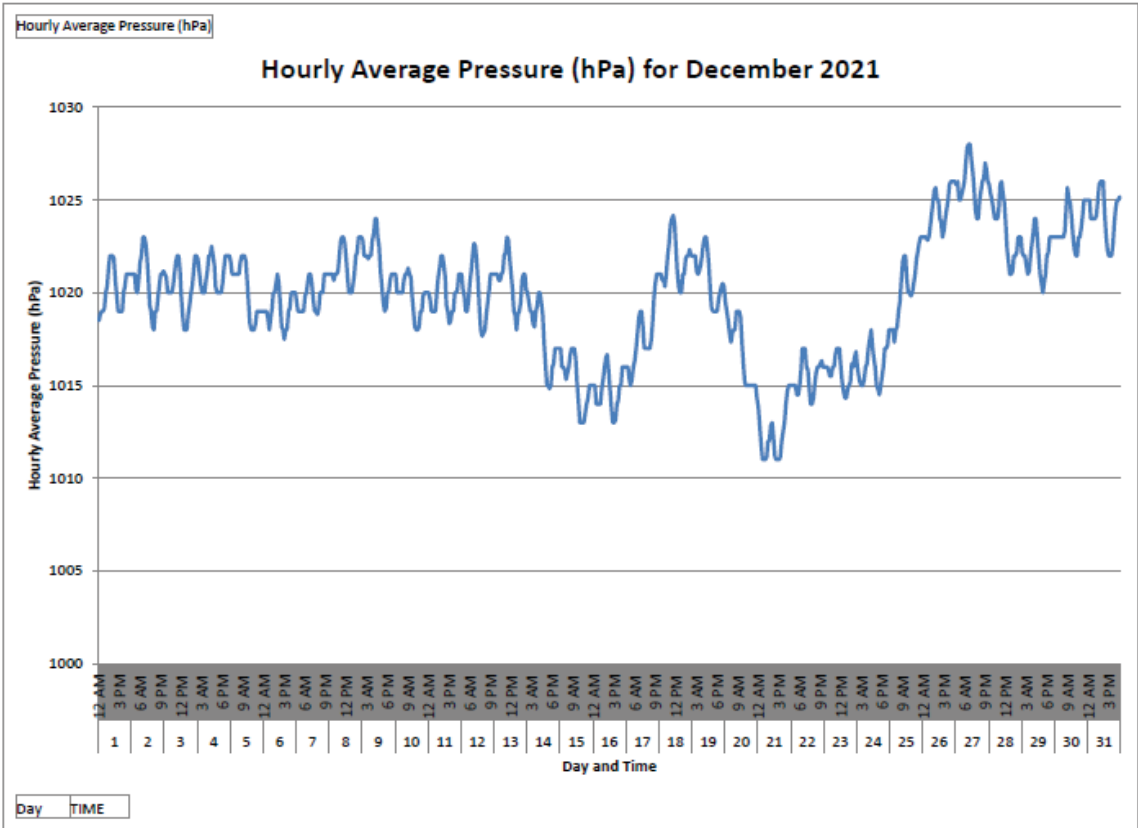

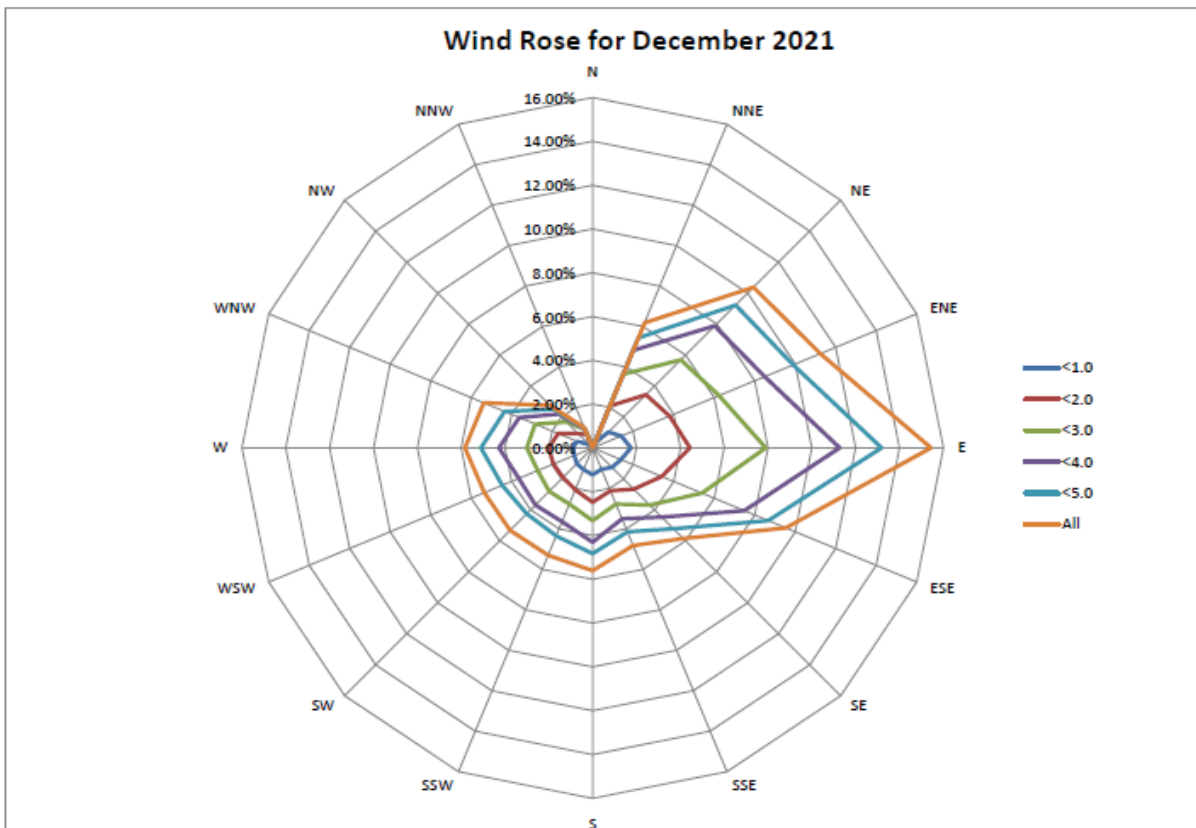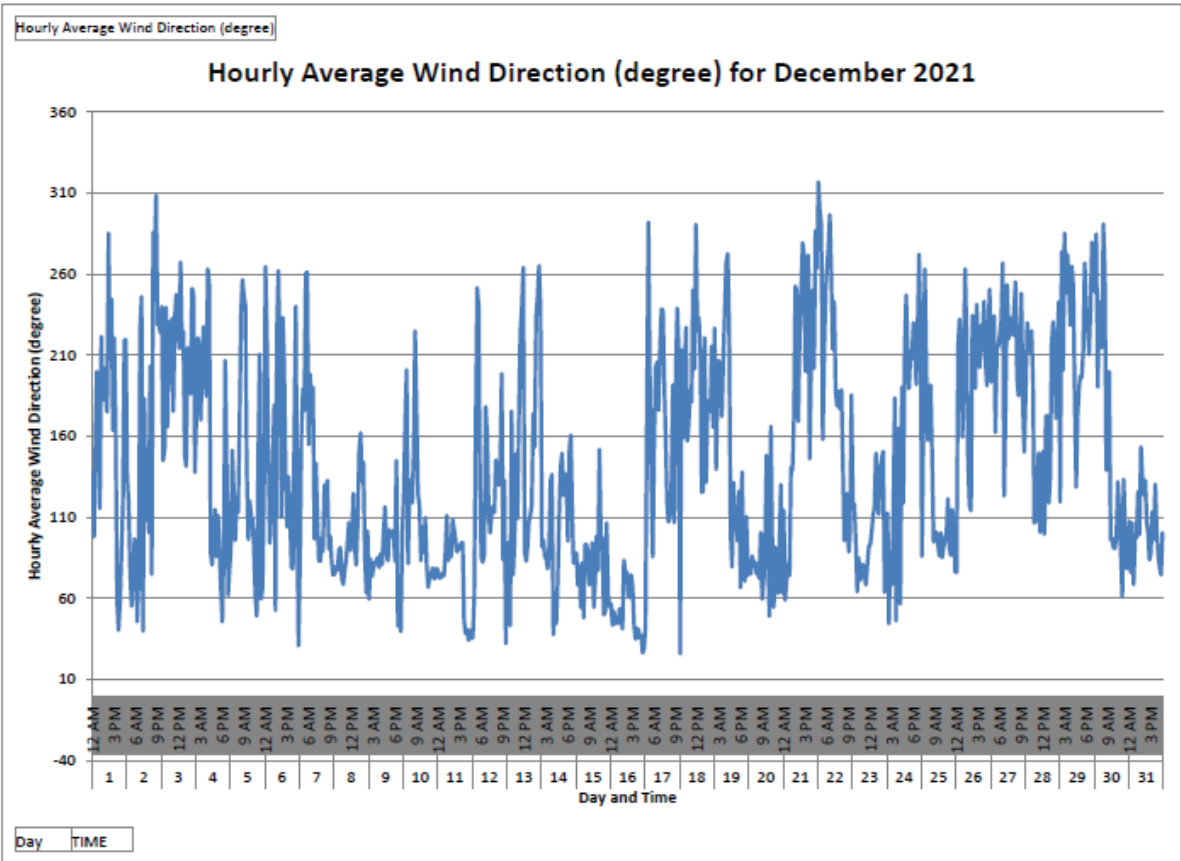

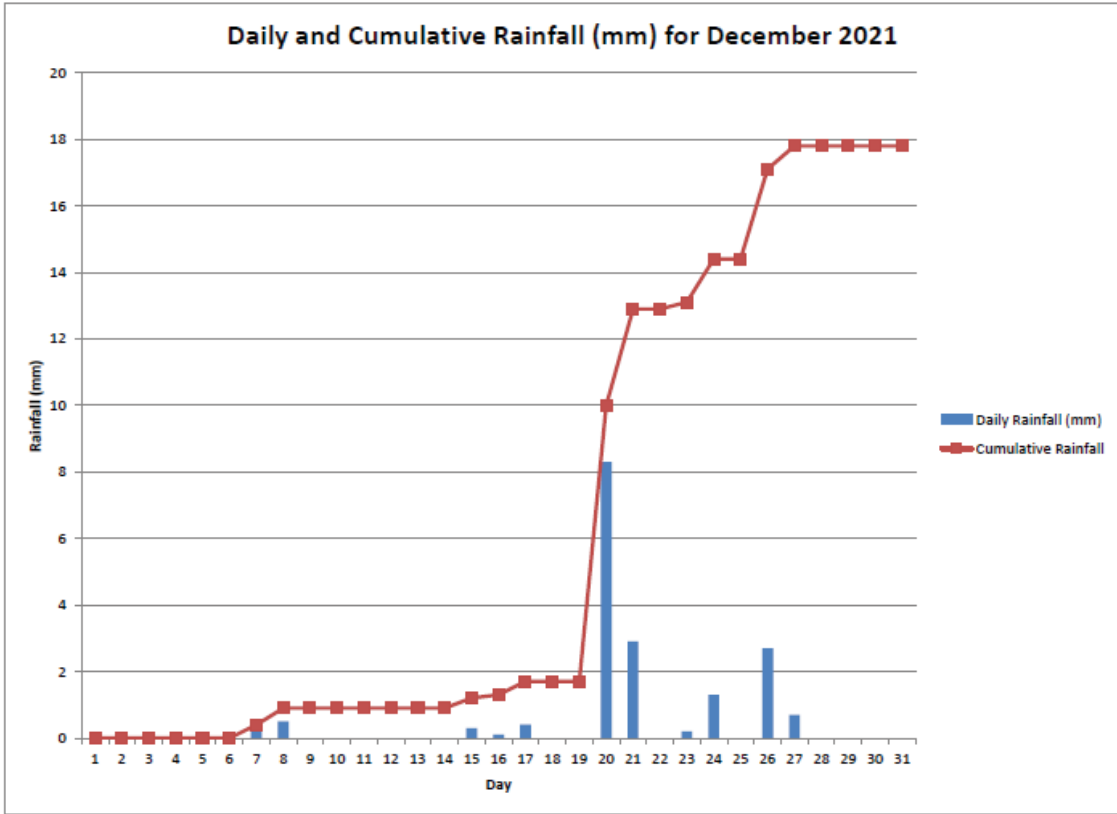

Annex D4

## Odour Monitoring Results



**Table D4.1 Odour Monitoring Results**

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
21 Nov 21	Sunny	OP1	10:06	27.6	2.4	N	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP2	10:15	28.8	1.0	N	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP3	10:20	28.3	1.3	NW	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP4	10:24	26.6	2.9	NE	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP5	10:28	26.1	3.5	NE	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP6	10:32	28.4	1.1	NW	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP7	10:39	29.8	1.3	N	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP8	10:42	29.3	1.3	S	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP9	10:48	30.8	1.5	NE	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP10	10:51	29.7	1.6	NE	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP1	14:03	29.5	1.3	N	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP2	14:06	29.7	0.9	N	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP3	14:10	28.2	1.4	S	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP4	14:14	28.7	2.1	E	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP5	14:18	27.9	3.3	NE	Yes	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP6	14:22	28.2	3.3	S	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP7	14:25	29.2	2.9	S	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP8	14:30	28.1	2.4	N	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP9	14:35	27.7	3.3	N	No	0	N/A	N/A	N/A
21 Nov 21	Sunny	OP10	14:39	28.2	2.4	E	Yes	0	N/A	N/A	N/A
21 Nov 21	Fine	OP1	18:05	24.0	0.1	NW	Yes	0	N/A	N/A	N/A
21 Nov 21	Fine	OP2	18:08	24.0	0.2	NW	Yes	0	N/A	N/A	N/A
21 Nov 21	Fine	OP3	18:12	23.4	0.4	NE	No	0	N/A	N/A	N/A
21 Nov 21	Fine	OP4	18:15	23.4	0.4	NE	No	0	N/A	N/A	N/A
21 Nov 21	Fine	OP5	18:18	23.7	0.8	NE	No	0	N/A	N/A	N/A
21 Nov 21	Fine	OP6	18:22	24.0	0.7	N	No	0	N/A	N/A	N/A
21 Nov 21	Fine	OP7	18:25	23.6	0.4	NW	No	0	N/A	N/A	N/A
21 Nov 21	Fine	OP8	18:29	23.5	0.9	N	No	0	N/A	N/A	N/A
21 Nov 21	Fine	OP9	18:34	23.6	0.7	SE	Yes	1	Gas (Pungent)	Town Gas Plant	N/A
21 Nov 21	Fine	OP10	18:38	23.5	0.5	SE	Yes	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP1	10:35	21.5	3.5	N	Yes	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP2	10:40	21.2	2.6	N	Yes	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP3	10:43	21.2	2.2	NE	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP4	10:46	21.8	1.3	E	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP5	10:51	20.9	4.0	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
22 Nov 21	Overcast	OP6	10:55	20.4	5.2	N	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP7	10:58	20.4	2.3	N	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP8	11:03	20.5	3.6	N	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP9	11:08	20.9	2.5	N	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP10	11:14	22.2	0.5	E	Yes	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP1	14:47	19.2	2.4	N	Yes	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP2	14:53	19.5	1.6	N	Yes	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP3	14:56	20.1	1	N	Yes	1	Exhaust gas	Generator	N/A
22 Nov 21	Overcast	OP4	15:00	20.5	1.8	NE	Yes	1	Biogas	Slurry Truck	N/A
22 Nov 21	Overcast	OP5	15:07	20.3	1.5	NE	Yes	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP6	15:10	19.4	2.5	N	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP7	15:14	19.3	3.3	N	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP8	15:18	19.5	2.4	NE	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP9	15:22	20.0	1.1	NE	No	0	N/A	N/A	N/A
22 Nov 21	Overcast	OP10	15:26	20.7	0.6	NE	No	0	N/A	N/A	N/A
22 Nov 21	Fine	OP1	18:07	21	3.3	N	Yes	0	N/A	N/A	N/A
22 Nov 21	Fine	OP2	18:10	21.3	2.5	N	Yes	0	N/A	N/A	N/A
22 Nov 21	Fine	OP3	18:14	22.3	2.4	N	Yes	1	Diesel	Generator	N/A
22 Nov 21	Fine	OP4	18:20	22	0.9	N	Yes	1	Biogas	Leachate Treatment Plant	N/A
22 Nov 21	Fine	OP5	18:23	21.6	2.3	N	Yes	0	N/A	N/A	N/A
22 Nov 21	Fine	OP6	18:27	21.5	2.1	NW	No	0	N/A	N/A	N/A
22 Nov 21	Fine	OP7	18:30	20.9	1.7	NW	No	0	N/A	N/A	N/A
22 Nov 21	Fine	OP8	18:33	19.8	3.5	N	No	0	N/A	N/A	N/A
22 Nov 21	Fine	OP9	18:37	19.7	3.5	N	No	0	N/A	N/A	N/A
22 Nov 21	Fine	OP10	18:40	19.5	2.5	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP1	10:33	17.2	3.5	N	Yes	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP2	10:37	17.8	0.8	N	Yes	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP3	10:39	17.3	1.4	NE	No	1	Diesel	Generator	N/A
23 Nov 21	Overcast	OP4	10:42	17.2	1.1	E	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP5	10:46	16.5	3.4	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP6	10:50	16.3	2.9	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP7	10:53	15.9	2	NE	Yes	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP8	10:57	15.7	2.5	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP9	11:01	16	2.5	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP10	11:05	16.4	1.8	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP1	14:40	18.3	3.8	N	Yes	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP2	14:44	18	2.2	N	Yes	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP3	14:47	17.9	2.4	NE	No	1	Diesel	Generator	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
23 Nov 21	Overcast	OP4	14:51	19.4	0.5	E	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP5	14:55	18.4	2.3	E	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP6	14:58	17.6	1.9	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP7	15:04	17.8	2.7	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP8	15:08	17.5	2.3	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP9	15:12	17.6	2.4	N	No	0	N/A	N/A	N/A
23 Nov 21	Overcast	OP10	15:15	18	0.6	N	No	0	N/A	N/A	N/A
23 Nov 21	Fine	OP1	18:10	20.5	2.2	NW	Yes	0	N/A	N/A	N/A
23 Nov 21	Fine	OP2	18:14	20.5	2.1	NW	Yes	0	N/A	N/A	N/A
23 Nov 21	Fine	OP3	18:18	21	1.7	NW	Yes	1	Diesel	Generator	N/A
23 Nov 21	Fine	OP4	18:23	21.8	0.8	NE	Yes	0	N/A	N/A	N/A
23 Nov 21	Fine	OP5	18:27	21.2	1.4	SE	No	0	N/A	N/A	N/A
23 Nov 21	Fine	OP6	18:31	20	2.4	N	No	0	N/A	N/A	N/A
23 Nov 21	Fine	OP7	18:35	18.5	1.9	N	No	0	N/A	N/A	N/A
23 Nov 21	Fine	OP8	18:39	19.4	1.9	N	No	0	N/A	N/A	N/A
23 Nov 21	Fine	OP9	18:44	18.4	1.5	N	No	0	N/A	N/A	N/A
23 Nov 21	Fine	OP10	18:48	18.9	2.1	N	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP1	10:32	21.9	1.3	N	Yes	1	Grass	Ground	N/A
24 Nov 21	Sunny	OP2	10:37	22.5	1.4	NW	Yes	1	Grass	Ground	N/A
24 Nov 21	Sunny	OP3	10:40	21.8	1.2	N	Yes	1	Diesel	Generator	N/A
24 Nov 21	Sunny	OP4	10:45	21.1	0.5	SE	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP5	10:49	20.2	2.5	NE	Yes	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP6	10:53	21.3	1.6	N	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP7	10:56	21.6	2.9	N	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP8	11:01	22.1	1.9	N	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP9	11:05	22.4	0.5	NE	Yes	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP10	11:08	21.3	3	NE	Yes	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP1	15:15	24.9	0.7	N	Yes	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP2	15:18	24.6	2.3	S	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP3	15:23	26	0.6	N	Yes	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP4	15:26	26.2	1.6	E	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP5	15:30	23.9	2.5	E	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP6	15:34	23.1	2.3	NE	Yes	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP7	15:38	25.4	1.8	S	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP8	15:41	25.7	0.5	SE	Yes	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP9	15:45	23.4	2.6	N	No	0	N/A	N/A	N/A
24 Nov 21	Sunny	OP10	15:49	23	2.6	NE	No	0	N/A	N/A	N/A
24 Nov 21	Fine	OP1	18:06	21.4	0.2	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
24 Nov 21	Fine	OP2	18:09	20.3	0.8	N	Yes	0	N/A	N/A	N/A
24 Nov 21	Fine	OP3	18:13	18.9	0.7	NE	No	0	N/A	N/A	N/A
24 Nov 21	Fine	OP4	18:16	19	0.9	N	Yes	0	N/A	N/A	N/A
24 Nov 21	Fine	OP5	18:20	19.6	1.3	S	No	0	N/A	N/A	N/A
24 Nov 21	Fine	OP6	18:23	19.7	1	N	No	0	N/A	N/A	N/A
24 Nov 21	Fine	OP7	18:26	19.6	0.5	NW	No	0	N/A	N/A	N/A
24 Nov 21	Fine	OP8	18:30	19.4	0.5	NW	No	0	N/A	N/A	N/A
24 Nov 21	Fine	OP9	18:34	19.2	0.8	NW	No	0	N/A	N/A	N/A
24 Nov 21	Fine	OP10	18:38	19.2	0.5	NW	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP1	10:41	25.7	1.5	NE	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP2	10:45	28.1	0.9	NE	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP3	10:49	30	0.5	NE	No	1	Diesel	Generator	N/A
25 Nov 21	Sunny	OP4	10:52	31.2	1	N	Yes	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP5	10:56	30.5	1	NE	Yes	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP6	10:59	27.7	2.4	N	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP7	11:04	27.3	1.9	N	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP8	11:08	27.1	1.7	N	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP9	11:12	27.8	1.1	N	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP10	11:16	30	0.5	N	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP1	14:33	24.9	3.2	S	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP2	14:37	25.2	2.2	S	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP3	14:41	27.3	1.3	SE	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP4	14:44	27.3	0.8	N	Yes	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP5	14:47	28.2	2	S	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP6	14:50	27.1	2.2	S	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP7	14:54	26.7	2.6	S	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP8	14:58	26.6	2.6	S	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP9	15:02	26.9	2	SW	No	0	N/A	N/A	N/A
25 Nov 21	Sunny	OP10	15:05	27.7	2.1	S	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP1	18:06	24.4	0.8	S	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP2	18:10	26.1	0.5	S	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP3	18:14	25.3	0.4	S	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP4	18:19	25	0.8	E	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP5	18:23	25.2	0.6	S	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP6	18:26	25.7	0.9	N	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP7	18:30	25.1	1.3	N	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP8	18:35	25.7	1.6	N	No	0	N/A	N/A	N/A
25 Nov 21	Fine	OP9	18:40	24.8	0.7	N	No	1	Acidic	Town gas plant	Intermittent

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
25 Nov 21	Fine	OP10	18:45	25.3	0.5	NE	Yes	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP1	10:33	30.1	0.6	N	Yes	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP2	10:38	30.3	0.7	S	No	0	Diesel	Generator	N/A
26 Nov 21	Sunny	OP3	10:47	30.6	0.6	S	No	1	Acidic	Leachate Treatment Plant	Intermittent
26 Nov 21	Sunny	OP4	10:53	29	0.9	S	No	1	N/A	N/A	N/A
26 Nov 21	Sunny	OP5	10:58	29.5	0.7	NE	Yes	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP6	11:02	28	2.1	NW	No	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP7	11:06	28.3	2.1	N	No	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP8	11:10	28	2.2	N	No	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP9	11:14	27.9	1.7	N	No	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP10	11:17	27.5	2.7	N	No	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP1	14:47	24.5	3.1	N	Yes	1	Grass	Ground	N/A
26 Nov 21	Sunny	OP2	14:51	27.1	1.1	N	Yes	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP3	14:54	25.7	0.8	NW	Yes	1	Diesel	Generator	N/A
26 Nov 21	Sunny	OP4	14:57	25.3	0.9	NW	Yes	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP5	15:01	27.5	1.1	N	No	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP6	15:04	26.7	1.7	NE	Yes	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP7	15:07	25.9	1.8	N	No	0	N/A	N/A	N/A
26 Nov 21	Sunny	OP8	15:11	27.4	1.8	N	No	1	Diesel	Generator	N/A
26 Nov 21	Sunny	OP9	15:16	24.4	3.1	N	No	1	Town gas	Town gas plant	N/A
26 Nov 21	Sunny	OP10	15:18	24.2	2.4	NE	Yes	0	N/A	N/A	N/A
26 Nov 21	Fine	OP1	18:19	22.2	2.1	S	No	0	N/A	N/A	N/A
26 Nov 21	Fine	OP2	18:22	22.1	0.2	S	No	0	N/A	N/A	N/A
26 Nov 21	Fine	OP3	18:26	22.1	1.2	SE	No	0	N/A	N/A	N/A
26 Nov 21	Fine	OP4	18:29	22.3	0.8	NE	Yes	0	N/A	N/A	N/A
26 Nov 21	Fine	OP5	18:33	22.3	3.6	E	No	0	N/A	N/A	N/A
26 Nov 21	Fine	OP6	18:36	22.5	1.8	NE	Yes	0	N/A	N/A	N/A
26 Nov 21	Fine	OP7	18:40	22.5	1.3	NE	Yes	0	N/A	N/A	N/A
26 Nov 21	Fine	OP8	18:43	22.6	0.9	E	Yes	0	N/A	N/A	N/A
26 Nov 21	Fine	OP9	18:46	22.5	0.7	N	No	0	N/A	N/A	N/A
26 Nov 21	Fine	OP10	18:49	22.6	1.2	NW	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP1	10:38	27	1.8	NE	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP2	10:43	30.3	0.8	N	Yes	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP3	10:47	29.6	2.2	SW	No	1	Diesel	Generator	N/A
27 Nov 21	Sunny	OP4	10:51	29.7	1.2	E	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP5	10:55	28.3	2.2	E	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP6	10:58	28.7	1.3	S	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP7	11:01	28.3	1.4	N	No	1	Diesel	Generator	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
27 Nov 21	Sunny	OP8	11:05	27.7	1.8	N	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP9	11:09	27	3.5	N	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP10	11:12	27.2	2.1	SE	Yes	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP1	14:34	27.1	2.4	S	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP2	14:38	27.3	2.3	S	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP3	14:42	27.8	1.4	W	No	1	Diesel	Generator	N/A
27 Nov 21	Sunny	OP4	14:46	29.2	1.3	E	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP5	14:50	27.5	2.2	E	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP6	14:54	25.8	4.7	NE	Yes	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP7	14:58	28.3	2.4	S	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP8	15:02	29	0.9	E	Yes	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP9	15:07	28.1	3.1	N	No	0	N/A	N/A	N/A
27 Nov 21	Sunny	OP10	15:11	28.7	1.7	N	No	0	N/A	N/A	N/A
27 Nov 21	Fine	OP1	18:05	22.4	1.3	N	Yes	0	N/A	N/A	N/A
27 Nov 21	Fine	OP2	18:09	23.1	0.2	N	Yes	0	N/A	N/A	N/A
27 Nov 21	Fine	OP3	18:13	22.9	0.7	S	No	0	N/A	N/A	N/A
27 Nov 21	Fine	OP4	18:17	23.8	1.2	S	No	0	N/A	N/A	N/A
27 Nov 21	Fine	OP5	18:21	23.5	1.9	E	No	0	N/A	N/A	N/A
27 Nov 21	Fine	OP6	18:25	23.7	1.6	NE	Yes	0	N/A	N/A	N/A
27 Nov 21	Fine	OP7	18:29	24.1	0.4	N	No	0	N/A	N/A	N/A
27 Nov 21	Fine	OP8	18:33	25.2	1.4	SE	Yes	0	N/A	N/A	N/A
27 Nov 21	Fine	OP9	18:37	24.5	0.7	N	No	0	N/A	N/A	N/A
27 Nov 21	Fine	OP10	18:42	24.3	0.7	N	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP1	10:36	29.7	0.8	N	Yes	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP2	10:40	28.3	2.2	S	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP3	10:44	27	2.3	S	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP4	10:47	28.3	2.5	E	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP5	10:51	26.3	3.2	E	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP6	10:55	26.5	3.4	S	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP7	10:58	28.6	1.3	N	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP8	11:03	27.1	3.8	N	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP9	11:07	27.2	3.3	N	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP10	11:11	27.1	2.7	N	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP1	15:40	30.1	0.6	S	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP2	15:35	28.5	2.3	S	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP3	15:31	31.2	0.5	NE	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP4	15:28	30	0.8	E	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP5	15:24	27.3	3.2	E	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
28 Nov 21	Sunny	OP6	15:21	28.1	3.2	NE	Yes	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP7	15:17	31.3	0.9	NE	Yes	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP8	15:13	30.5	0.9	E	Yes	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP9	15:09	29.6	3.4	N	No	0	N/A	N/A	N/A
28 Nov 21	Sunny	OP10	15:05	29.2	3	E	Yes	0	N/A	N/A	N/A
28 Nov 21	Fine	OP1	18:10	27.5	0.4	N	Yes	0	N/A	N/A	N/A
28 Nov 21	Fine	OP2	18:14	26.3	0.4	N	Yes	0	N/A	N/A	N/A
28 Nov 21	Fine	OP3	18:18	26.6	0.4	E	No	0	N/A	N/A	N/A
28 Nov 21	Fine	OP4	18:23	26.7	1.2	W	No	0	N/A	N/A	N/A
28 Nov 21	Fine	OP5	18:27	27.5	0.6	E	No	0	N/A	N/A	N/A
28 Nov 21	Fine	OP6	18:31	26.4	2.1	N	No	0	N/A	N/A	N/A
28 Nov 21	Fine	OP7	18:35	27.4	1.3	NE	Yes	0	N/A	N/A	N/A
28 Nov 21	Fine	OP8	18:39	27.1	0.9	N	No	0	N/A	N/A	N/A
28 Nov 21	Fine	OP9	18:42	27.3	0.7	N	No	1	Acidic	Town gas plant	N/A
28 Nov 21	Fine	OP10	18:46	28.2	0.6	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP1	11:10	30.2	1.6	N	Yes	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP2	11:15	30.6	1.7	N	Yes	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP3	11:20	29.8	1.1	NE	Yes	1	Diesel	Generator	N/A
29 Nov 21	Sunny	OP4	11:24	29.6	2.3	N	Yes	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP5	11:28	28.3	2.6	E	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP6	11:32	29	2.7	NE	Yes	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP7	11:35	28.4	1.9	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP8	11:39	28.1	1.7	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP9	11:43	28.4	1.5	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP10	11:46	27.9	2.4	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP1	14:33	28.5	0.4	N	Yes	1	Grass	Vegetation	N/A
29 Nov 21	Sunny	OP2	14:37	28.1	0.9	E	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP3	14:41	28.5	1.4	NE	Yes	1	Diesel	Generator	N/A
29 Nov 21	Sunny	OP4	14:44	27.8	1.3	E	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP5	14:48	28.6	1.5	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP6	14:50	29.1	0	N/A	N/A	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP7	14:54	28.6	0.5	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP8	14:57	28.4	0.5	N	No	0	N/A	N/A	N/A
29 Nov 21	Sunny	OP9	15:01	28.6	1	N	No	1	Acidic fume	Town gas plant	N/A
29 Nov 21	Sunny	OP10	15:04	29.4	0.6	NE	Yes	0	N/A	N/A	N/A
29 Nov 21	Fine	OP1	18:09	22	0	N/A	N/A	0	N/A	N/A	N/A
29 Nov 21	Fine	OP2	18:13	22.2	0	N/A	N/A	0	N/A	N/A	N/A
29 Nov 21	Fine	OP3	18:18	21.8	0.2	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
29 Nov 21	Fine	OP4	18:22	22.7	0.3	S	No	0	N/A	N/A	N/A
29 Nov 21	Fine	OP5	18:26	23	0.2	S	No	0	N/A	N/A	N/A
29 Nov 21	Fine	OP6	18:29	23.2	0.4	S	No	0	N/A	N/A	N/A
29 Nov 21	Fine	OP7	18:34	23.3	0	N/A	N/A	0	N/A	N/A	N/A
29 Nov 21	Fine	OP8	18:37	22.3	1.9	N	No	0	N/A	N/A	N/A
29 Nov 21	Fine	OP9	18:41	22.4	1	N	No	1	Acidic	Town gas plant	N/A
29 Nov 21	Fine	OP10	18:46	22.7	0.2	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP1	10:33	24.1	3.7	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP2	10:36	24.5	4.1	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP3	10:40	25.5	2.5	N	Yes	1	Diesel	Generator	N/A
30 Nov 21	Sunny	OP4	10:43	26.6	1.7	N	Yes	1	Acidic	Leachate Treatment Plant	N/A
30 Nov 21	Sunny	OP5	10:46	26.7	4.4	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP6	10:49	25.7	3.3	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP7	10:53	26.3	3.1	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP8	10:56	25.8	4.4	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP9	10:59	27.3	2.4	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP10	11:03	27.4	1.3	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP1	14:36	25.8	1.3	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP2	14:39	26.9	1.8	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP3	14:42	29.4	1.2	NE	Yes	1	Diesel	Generator	N/A
30 Nov 21	Sunny	OP4	14:46	29.4	0.7	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP5	14:50	29.3	2.1	E	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP6	14:53	28.5	1.8	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP7	14:57	26.8	3.1	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP8	15:00	28.2	1.5	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP9	15:04	26.9	6.6	N	No	0	N/A	N/A	N/A
30 Nov 21	Sunny	OP10	15:07	26.6	2.8	N	No	0	N/A	N/A	N/A
30 Nov 21	Fine	OP1	18:00	22.3	3.1	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Fine	OP2	18:03	21.9	3	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Fine	OP3	18:07	22.1	2.4	N	Yes	0	N/A	N/A	N/A
30 Nov 21	Fine	OP4	18:10	22.5	0.8	NE	Yes	0	N/A	N/A	N/A
30 Nov 21	Fine	OP5	18:13	22.7	2.8	NE	Yes	0	N/A	N/A	N/A
30 Nov 21	Fine	OP6	18:16	21.7	3.4	N	No	0	N/A	N/A	N/A
30 Nov 21	Fine	OP7	18:20	22.1	4.7	N	No	0	N/A	N/A	N/A
30 Nov 21	Fine	OP8	18:23	21.4	5.6	N	No	0	N/A	N/A	N/A
30 Nov 21	Fine	OP9	18:26	21.6	4.7	N	No	0	N/A	N/A	N/A
30 Nov 21	Fine	OP10	18:32	21.9	2.4	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP1	10:30	20	4.7	N	Yes	0	N/A	N/A	N/A



Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
1-Dec-21	Sunny	OP2	10:33	20.6	3.9	N	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP3	10:37	22.5	1.2	N	Yes	1	Oil	Electric Generator	N/A
1-Dec-21	Sunny	OP4	10:40	22.7	2.3	E	No	1	Acidic	Leachate Treatment Plant	N/A
1-Dec-21	Sunny	OP5	10:43	22.6	3.6	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP6	10:47	20.8	4.5	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP7	10:50	19.7	6.2	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP8	10:53	20.3	4.2	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP9	10:57	20.4	4.6	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP10	11:01	21.5	1.7	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP1	14:39	20.8	2.6	N	Yes	1	grassy	Vegetation	N/A
1-Dec-21	Sunny	OP2	14:43	22.1	0.8	NW	Yes	1	grassy	Vegetation	N/A
1-Dec-21	Sunny	OP3	14:47	21.6	1.9	NE	Yes	1	Diesel	Generator	N/A
1-Dec-21	Sunny	OP4	14:50	24	0.9	N	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP5	14:55	22.6	1.1	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP6	14:58	21	2.9	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP7	15:01	20.7	2.7	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP8	15:05	21	1.5	N	No	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP9	15:08	21.5	3	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Sunny	OP10	15:11	22	0.5	N	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP1	18:05	17.1	12	N	Yes	0	N/A	N/A	N/A
1-Dec-21	Fine	OP2	18:08	17.6	10.1	N	Yes	0	N/A	N/A	N/A
1-Dec-21	Fine	OP3	18:12	17.5	1.9	NE	Yes	0	N/A	N/A	N/A
1-Dec-21	Fine	OP4	18:16	17.2	4.5	E	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP5	18:20	17.3	8.6	E	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP6	18:24	17.6	7.5	N	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP7	18:28	17.2	10.7	N	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP8	18:32	17	6.5	N	No	1	Diesel	Electric Generator	N/A
1-Dec-21	Fine	OP9	18:36	17.5	6.4	N	No	0	N/A	N/A	N/A
1-Dec-21	Fine	OP10	18:40	17.7	4.1	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP1	10:33	22.5	3.6	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP2	10:37	23.5	2.4	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP3	10:40	24.8	1.1	N	Yes	1	Oil	Electric Generator	N/A
2-Dec-21	Sunny	OP4	10:44	24.5	0.8	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP5	10:48	24.6	2.2	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP6	10:52	24.4	2.6	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP7	10:55	22.8	3.2	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP8	10:58	23.1	2.6	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP9	11:02	24.2	1.6	N	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
2-Dec-21	Sunny	OP10	11:06	24.6	0.8	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP1	14:32	22.5	2.4	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP2	14:35	24.8	1.7	N	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP3	14:38	24.1	1.8	N	Yes	1	Oil	Generator	N/A
2-Dec-21	Sunny	OP4	14:41	26	1.1	N	Yes	1	Acidic	Leachate Treatment Plant	N/A
2-Dec-21	Sunny	OP5	14:44	26.6	0.6	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP6	14:47	25.5	1.5	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP7	14:50	24.2	2.3	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP8	14:53	23.8	2.9	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP9	14:56	23.8	2.2	N	No	0	N/A	N/A	N/A
2-Dec-21	Sunny	OP10	15:02	24	1.4	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Fine	OP1	18:28	19.7	0.5	S	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP2	18:33	19.3	0.5	S	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP3	18:37	17.4	0.8	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Fine	OP4	18:40	17.5	0.9	NE	Yes	0	N/A	N/A	N/A
2-Dec-21	Fine	OP5	18:44	17.2	1.3	NW	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP6	18:49	17.5	1.1	N	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP7	18:52	17.7	1.3	N	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP8	18:56	17.8	1.3	N	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP9	18:59	18	1	N	No	0	N/A	N/A	N/A
2-Dec-21	Fine	OP10	19:03	18	0.5	NE	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP1	10:40	19.2	4.9	NW	Yes	1	grassy	Vegetation	N/A
3-Dec-21	Sunny	OP2	10:44	20.7	2.5	NW	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP3	10:47	20.2	0.8	N	Yes	1	Diesel	Generator	N/A
3-Dec-21	Sunny	OP4	10:50	21.1	1.4	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP5	10:54	21.4	0.9	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP6	10:56	21	3.6	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP7	10:59	20.4	2.9	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP8	11:02	19.5	4.3	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP9	11:06	19.4	5.9	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP10	11:08	19.8	1.9	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP1	14:33	23.3	1.5	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP2	14:36	24.2	1.2	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP3	14:40	25.6	1.8	NE	Yes	1	Oil	Electric Generator	N/A
3-Dec-21	Sunny	OP4	14:44	26.9	2.2	NE	Yes	1	Acidic	Leachate Treatment Plant	N/A
3-Dec-21	Sunny	OP5	14:48	25.8	1.1	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP6	14:51	24.5	2.8	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP7	14:54	24.1	3	N	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
3-Dec-21	Sunny	OP8	14:57	24.3	1.4	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP9	15:00	24	1.5	N	No	0	N/A	N/A	N/A
3-Dec-21	Sunny	OP10	15:04	24.8	1	N	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP1	18:03	23.2	1.4	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP2	18:07	22.4	2.2	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP3	18:11	23.7	0.7	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP4	18:15	24.2	0.5	N	Yes	0	N/A	N/A	N/A
3-Dec-21	Fine	OP5	18:19	24.5	0.4	N	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP6	18:22	23.9	1.2	N	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP7	18:25	23.2	1.3	N	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP8	18:28	22.6	1.3	N	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP9	18:32	23.1	1.6	N	No	0	N/A	N/A	N/A
3-Dec-21	Fine	OP10	18:36	24.2	0.6	N	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP1	10:40	26.1	2.2	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP2	10:44	25.8	1.9	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP3	10:48	25.2	2.8	SW	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP4	10:52	24.6	3.4	E	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP5	10:56	24.1	2.6	E	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP6	11:00	23.9	3.6	N	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP7	11:04	24	4.2	N	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP8	11:08	23.4	1.2	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP9	11:12	26.3	2.1	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP10	11:16	25.8	2.9	N	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP1	14:36	24.9	1.3	N	Yes	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP2	14:40	25.3	2.6	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP3	14:44	25.8	3.3	SW	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP4	14:48	24.8	2.3	E	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP5	14:52	23.3	4.6	E	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP6	14:56	25.2	1.2	SE	Yes	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP7	15:00	26.1	2	SW	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP8	15:03	26.7	1.5	S	No	0	N/A	N/A	N/A
4-Dec-21	Sunny	OP9	15:08	27.6	1.2	N	No	1	Acidic	Town gas	N/A
4-Dec-21	Sunny	OP10	15:12	25.8	4.3	NE	Yes	0	N/A	N/A	N/A
4-Dec-21	Fine	OP1	18:05	20.1	1.1	N	Yes	0	N/A	N/A	N/A
4-Dec-21	Fine	OP2	18:08	19.7	0.7	SE	No	0	N/A	N/A	N/A
4-Dec-21	Fine	OP3	18:12	19.6	0.7	SE	No	0	N/A	N/A	N/A
4-Dec-21	Fine	OP4	18:16	19.5	1.2	SE	No	0	N/A	N/A	N/A
4-Dec-21	Fine	OP5	18:19	19.2	2.7	E	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
4-Dec-21	Fine	OP6	18:22	19.4	1.9	E	Yes	0	N/A	N/A	N/A
4-Dec-21	Fine	OP7	18:25	19.7	1.2	N	No	0	N/A	N/A	N/A
4-Dec-21	Fine	OP8	18:28	19.5	0.8	NE	Yes	0	N/A	N/A	N/A
4-Dec-21	Fine	OP9	18:32	19.4	0.7	NE	Yes	1	Acidic	Town gas plant	N/A
4-Dec-21	Fine	OP10	18:36	19.6	0.6	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP1	10:33	24.6	2.3	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP2	10:37	26.1	0.7	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP3	10:40	26.3	1.2	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP4	10:44	26.1	0.9	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP5	10:49	25.6	2.5	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP6	10:53	25.4	2.5	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP7	10:56	26.2	1.8	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP8	11:00	26.3	1.7	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP9	11:04	25.8	2.3	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP10	11:08	25.3	1.1	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP1	15:15	26.3	2.5	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP2	15:18	26.9	1.6	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP3	15:21	27.1	2.2	NE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP4	15:25	27.2	1.7	N	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP5	15:30	26.5	2.7	SE	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP6	15:34	26.3	1.8	E	No	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP7	15:39	25.1	4.2	E	No	1	Acidic	Leachate Treatment Plant	N/A
5-Dec-21	Sunny	OP8	15:43	26.4	1.7	NW	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP9	15:47	26.9	1.2	SW	Yes	0	N/A	N/A	N/A
5-Dec-21	Sunny	OP10	15:51	26.2	0.5	S	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP1	18:00	21.3	0.6	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Fine	OP2	18:04	22.2	0.4	S	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP3	18:07	22.4	0.6	N	Yes	0	N/A	N/A	N/A
5-Dec-21	Fine	OP4	18:11	22.1	1.3	E	No	1	Acidic	Leachate Treatment Plant	N/A
5-Dec-21	Fine	OP5	18:14	21.8	1.9	E	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP6	18:17	22.3	0.9	N	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP7	18:20	22.5	0.7	N	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP8	18:24	21.6	1.4	N	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP9	18:31	22.1	0.8	N	No	0	N/A	N/A	N/A
5-Dec-21	Fine	OP10	18:36	22.4	1.5	N	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP1	10:35	24.1	3.3	N	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP2	10:39	26	1.4	N	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP3	10:44	26.1	1.9	N	Yes	1	Oil	Generator	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
6-Dec-21	Sunny	OP4	10:49	25.8	2.2	NE	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP5	10:53	25.6	0.9	NE	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP6	10:57	25.4	1.2	N	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP7	11:00	24.3	1.1	N	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP8	11:04	24.8	0.7	N	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP9	11:08	25.6	1	SE	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP10	11:12	24.8	0.8	E	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP1	14:34	24.1	1.4	N	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP2	14:37	23.2	2.1	NW	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP3	14:40	25.8	1.1	N	Yes	1	Diesel	Generator	N/A
6-Dec-21	Sunny	OP4	14:44	24.4	2.5	E	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP5	14:47	23.7	2.4	E	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP6	14:50	25.7	0.8	NE	Yes	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP7	14:53	24.8	1.8	N	No	1	Wood Material	Worksite Constructing	N/A
6-Dec-21	Sunny	OP8	14:58	25.8	1.8	N	No	0	N/A	N/A	N/A
6-Dec-21	Sunny	OP9	15:03	27.2	0.4	NE	Yes	1	Town gas	Town gas plant	N/A
6-Dec-21	Sunny	OP10	15:06	23.9	1.2	N	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP1	18:10	25.8	0.6	N	Yes	0	N/A	N/A	N/A
6-Dec-21	Fine	OP2	18:14	25.4	0.7	N	Yes	0	N/A	N/A	N/A
6-Dec-21	Fine	OP3	18:18	25.5	0.5	E	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP4	18:21	25.3	1.3	E	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP5	18:25	25.6	1.6	E	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP6	18:28	25.6	0.7	N	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP7	18:33	25.2	1.4	N	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP8	18:37	25.5	0.5	N	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP9	18:41	25.7	0.5	N	No	0	N/A	N/A	N/A
6-Dec-21	Fine	OP10	18:45	24.9	0.6	N	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP1	10:33	26.3	1.4	N	Yes	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP2	10:37	26.1	3.1	N	Yes	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP3	10:40	27.1	0.6	S	No	1	Oil	Electric Generator	N/A
7-Dec-21	Sunny	OP4	10:44	26.6	0.7	E	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP5	10:49	25.9	2.5	E	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP6	10:54	25.6	1.8	N	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP7	10:58	26.4	1.7	N	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP8	11:03	26.1	1.2	N	No	1	Oil	Electric Generator	N/A
7-Dec-21	Sunny	OP9	11:07	26.3	1.8	N	No	0	N/A	N/A	N/A
7-Dec-21	Sunny	OP10	11:11	26.8	1.4	N	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP1	14:39	23.9	0.6	NE	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
7-Dec-21	Overcast	OP2	14:41	23.3	3.2	S	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP3	14:44	23.6	0.6	N	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP4	14:47	23.5	1.2	E	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP5	14:51	23.2	2.3	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP6	14:53	22.9	3.3	E	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP7	14:56	23.7	2.2	S	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP8	14:59	24.2	1.2	S	No	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP9	15:02	24.5	2.7	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Overcast	OP10	15:06	24.3	2.2	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP1	18:37	24.8	1.6	N	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP2	18:41	24.6	1.9	N	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP3	18:45	24.5	2	W	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP4	18:49	23.9	1.3	W	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP5	18:53	24.2	2.5	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP6	18:56	24.9	0.9	NE	Yes	0	N/A	N/A	N/A
7-Dec-21	Fine	OP7	19:00	25.4	1.3	S	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP8	19:04	25.2	0.7	S	No	1	Oil	Electric Generator	N/A
7-Dec-21	Fine	OP9	19:07	24.9	3.1	S	No	0	N/A	N/A	N/A
7-Dec-21	Fine	OP10	19:11	24.5	0.9	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP1	10:37	25.6	0.4	NW	Yes	1	grassy	Vegetation	N/A
8-Dec-21	Sunny	OP2	10:40	23.6	2.3	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP3	10:43	22.4	2.6	W	No	1	Diesel	Generator	N/A
8-Dec-21	Sunny	OP4	10:46	23.1	2.3	W	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP5	10:50	21.1	6.5	NE	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP6	10:52	22.2	2.7	N	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP7	10:55	22.4	1.9	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP8	10:59	22.9	1.1	N	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP9	11:02	23.2	1.7	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP10	11:05	22.8	1.4	N	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP1	14:32	25.9	1.3	NW	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP2	14:36	26.1	1.6	SE	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP3	14:40	25.9	2.1	NW	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP4	14:43	26.9	1.6	W	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP5	14:47	25.8	2.7	NE	Yes	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP6	14:50	25.3	1.8	SW	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP7	14:54	25.8	1.2	NW	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP8	14:57	26.1	1	S	No	0	N/A	N/A	N/A
8-Dec-21	Sunny	OP9	15:01	25.3	2.7	E	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
8-Dec-21	Sunny	OP10	15:05	25.2	0.9	N	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP1	18:10	24.3	1.9	N	Yes	0	N/A	N/A	N/A
8-Dec-21	Fine	OP2	18:14	24.6	2.6	N	Yes	0	N/A	N/A	N/A
8-Dec-21	Fine	OP3	18:20	24.1	0.9	W	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP4	18:25	24.3	0.7	E	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP5	18:31	24.4	1.5	NW	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP6	18:35	23.9	2	N	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP7	18:41	24.7	1.6	N	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP8	18:44	24.2	2.5	S	No	0	N/A	N/A	N/A
8-Dec-21	Fine	OP9	18:48	23.3	3.4	NE	Yes	0	N/A	N/A	N/A
8-Dec-21	Fine	OP10	18:53	23.2	2.3	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP1	10:35	27.1	0.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP2	10:39	27.2	0.7	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP3	10:43	24.9	3.2	W	No	1	Oil	Electric Generator	N/A
9-Dec-21	Sunny	OP4	10:47	25.3	1.3	E	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP5	10:51	24.4	2.9	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP6	10:55	25.4	2.3	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP7	10:58	27.2	1.2	N	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP8	11:00	25.5	1.8	N	No	1	Acidic Gas	Town Gas Plant	N/A
9-Dec-21	Sunny	OP9	11:04	25.4	0.7	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP10	11:07	25.1	2.2	NE	Yes	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP1	14:40	25.4	0.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP2	14:45	25.5	1.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP3	14:49	25.2	1.1	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP4	14:53	25.4	0.9	E	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP5	14:57	27.3	0.7	E	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP6	15:00	26.2	0.5	N	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP7	15:04	26.6	1.6	S	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP8	15:07	25.4	1.5	N	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP9	15:10	25.2	2.8	N	No	0	N/A	N/A	N/A
9-Dec-21	Sunny	OP10	15:13	24.6	1.5	E	Yes	0	N/A	N/A	N/A
9-Dec-21	Fine	OP1	18:03	26.1	0.5	N	Yes	0	N/A	N/A	N/A
9-Dec-21	Fine	OP2	18:07	25.8	0.5	S	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP3	18:11	25.6	0.4	E	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP4	18:15	24.7	1.1	SE	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP5	18:20	25.1	1.8	E	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP6	18:24	25.4	0.6	N	No	0	N/A	N/A	N/A
9-Dec-21	Fine	OP7	18:29	24.8	0.5	N	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind		From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
						Direction	Direction					
9-Dec-21	Fine	OP8	18:32	25.2	0.7	N	N	No	1	Acidic Gas	Town gas plant	N/A
9-Dec-21	Fine	OP9	18:36	25.9	0.2	N	N	No	1	Town gas	Town gas plant	N/A
9-Dec-21	Fine	OP10	18:40	24.8	1.1	N	N	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP1	10:39	23.1	2.9	N	N	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP2	10:42	24.3	1.6	SW	SW	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP3	10:44	24.5	1.3	SW	SW	No	1	Diesel	Generator	N/A
10-Dec-21	Sunny	OP4	10:47	23.4	1.3	NE	NE	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP5	10:50	24.5	1.3	NE	NE	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP6	10:52	23.9	1.8	NW	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP7	10:54	24.4	2.3	NW	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP8	10:58	24.8	1.6	NW	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP9	11:03	24.4	3.7	NW	NW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP10	11:05	24.6	1.1	SE	SE	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP11	11:12	24.3	2.2	S	S	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP1	14:35	26.3	1.4	S	S	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP2	14:39	26.5	0.8	S	S	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP3	14:43	26.1	1.4	SW	SW	No	1	Oil	Generator	N/A
10-Dec-21	Sunny	OP4	14:48	26.3	2.4	E	E	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP5	14:50	25.3	3.1	E	E	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP6	14:54	26.1	0.8	S	S	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP7	14:57	25.8	1.8	N	N	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP8	15:01	24.6	3.3	N	N	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP9	15:05	27	1.2	SW	SW	No	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP10	15:09	26.7	0.9	E	E	Yes	0	N/A	N/A	N/A
10-Dec-21	Sunny	OP11	15:21	27.4	2.7	E	E	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP1	18:05	24.9	1.8	S	S	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP2	18:09	25.1	0.6	S	S	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP3	18:13	24.6	0.8	W	W	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP4	18:17	24.4	4.2	E	E	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP5	18:20	24	3.4	E	E	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP6	18:23	24.2	2.9	N	N	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP7	18:27	24.8	0.8	N	N	Yes	0	N/A	N/A	N/A
10-Dec-21	Fine	OP8	18:30	25.3	2.7	S	S	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP9	18:34	25.1	0.8	N	N	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP10	18:38	24.9	1.3	N	N	No	0	N/A	N/A	N/A
10-Dec-21	Fine	OP11	18:48	24.7	0.7	W	W	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP1	10:35	27.4	1.1	N	N	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP2	10:38	28.1	0.7	N	N	Yes	0	N/A	N/A	N/A



Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
11-Dec-21	Sunny	OP3	10:41	28.2	1.9	NE	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP4	10:45	27.1	3.2	NE	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP5	10:49	27.3	2.9	E	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP6	10:53	27.4	2.6	E	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP7	10:57	28.3	0.9	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP8	11:00	28.5	0.4	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP9	11:04	28.0	2.2	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP10	11:07	27.6	3.2	N	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP11	11:20	28.8	1.8	E	No	1	Oil	Generator	N/A
11-Dec-21	Sunny	OP1	15:04	28.7	0.6	SW	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP2	15:08	26.4	2.3	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP3	15:12	26.2	1.3	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP4	15:15	27.4	1.2	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP5	15:19	26.4	2.6	E	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP6	15:23	27.1	1.3	E	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP7	15:27	28.5	0.6	SW	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP8	15:31	27.6	0.7	SE	Yes	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP9	15:34	28.1	1.3	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP10	15:38	26.1	2.9	S	No	0	N/A	N/A	N/A
11-Dec-21	Sunny	OP11	15:50	26.2	3.3	SE	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP1	18:06	23.0	0.1	N	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP2	18:10	22.4	0.6	N	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP3	18:13	22.3	0.5	E	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP4	18:17	22.2	0.8	SE	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP5	18:21	22.1	1.9	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP6	18:24	21.9	1.0	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP7	18:27	21.9	0.7	N	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP8	18:31	21.0	1.1	N	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP9	18:34	20.9	1.8	N	No	0	N/A	N/A	N/A
11-Dec-21	Fine	OP10	18:37	21.4	0.6	NE	Yes	0	N/A	N/A	N/A
11-Dec-21	Fine	OP11	18:45	22.6	1.1	NE	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP1	10:35	27.2	1.1	N	Yes	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP2	10:40	26.5	2.2	N	Yes	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP3	10:43	26.3	1.8	SW	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP4	10:47	26.1	3.5	E	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP5	10:51	25.3	2.2	E	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP6	10:55	25.5	1.1	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP7	10:59	24.9	1.3	S	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
12-Dec-21	Sunny	OP8	11:03	25.2	1.1	N	Yes	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP9	11:08	24.8	2.4	N	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP10	11:10	24.5	0.9	E	Yes	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP11	11:18	24.4	3.2	E	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP1	15:46	24.4	3.1	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP2	15:41	24.5	0.7	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP3	15:37	24.7	0.8	SW	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP4	15:34	24.8	1.2	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP5	15:31	25.0	1.6	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP6	15:27	24.7	1.8	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP7	15:24	25.1	2.7	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP8	15:19	25.7	1.7	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP9	15:14	26.1	2.2	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP10	15:10	25.3	1.1	S	No	0	N/A	N/A	N/A
12-Dec-21	Sunny	OP11	15:01	25.5	2.5	E	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP1	18:02	24.2	1.0	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP2	18:06	24.0	0.4	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP3	18:10	23.7	0.6	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP4	18:13	23.5	1.7	E	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP5	18:17	23.6	1.3	E	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP6	18:21	23.8	1.5	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP7	18:26	23.6	1.9	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP8	18:30	24.1	0.5	S	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP9	18:34	24.3	0.7	N	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP10	18:37	24.5	0.6	N	No	0	N/A	N/A	N/A
12-Dec-21	Fine	OP11	18:50	24.3	0.8	E	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP1	10:46	21.0	2.4	N	Yes	1	Grassy	Vegetation	N/A
13-Dec-21	Sunny	OP2	10:50	21.1	2.1	N	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP3	10:53	23.4	0.8	N	Yes	1	Diesel	Generator	N/A
13-Dec-21	Sunny	OP4	10:55	22.2	1.6	NE	Yes	1	Leachate	Leachate Treatment Plant	N/A
13-Dec-21	Sunny	OP5	10:59	20.8	3.9	E	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP6	11:01	20.1	4.8	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP7	11:04	21.3	4.4	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP8	11:07	20.6	2.2	NE	Yes	1	Diesel	Generator	N/A
13-Dec-21	Sunny	OP9	11:11	20.2	2.2	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP10	11:13	21.0	1.6	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP11	11:30	22.3	1.6	S	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP1	14:35	24.3	1.3	S	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
13-Dec-21	Sunny	OP2	14:40	24.5	1.5	S	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP3	14:44	24.7	1.5	SW	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP4	14:49	24.9	1.7	E	No	1	Acidic	Slurry Truck	N/A
13-Dec-21	Sunny	OP5	14:53	25.3	1.2	E	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP6	14:56	24.0	2.4	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP7	15:00	25.4	0.8	NW	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP8	15:04	25.2	1.1	N	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP9	15:07	24.5	2.0	N	No	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP10	15:10	24.7	0.9	NE	Yes	0	N/A	N/A	N/A
13-Dec-21	Sunny	OP11	15:20	23.6	1.6	E	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP1	18:07	23.2	0.5	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP2	18:11	22.8	0.3	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP3	18:15	22.5	0.2	SE	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP4	18:19	22.6	0.7	E	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP5	18:22	22.5	1.3	W	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP6	18:25	22.4	0.8	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP7	18:29	22.1	0.8	N	Yes	0	N/A	N/A	N/A
13-Dec-21	Fine	OP8	18:33	22.3	0.7	N	Yes	0	N/A	N/A	N/A
13-Dec-21	Fine	OP9	18:36	22.5	0.6	S	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP10	18:40	22.2	0.5	N	No	0	N/A	N/A	N/A
13-Dec-21	Fine	OP11	18:49	22.6	0.5	N	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP1	10:35	24.4	2.1	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP2	10:38	24.1	1.3	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP3	10:42	24.5	0.6	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP4	10:45	24.2	0.5	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP5	10:49	24.3	1.7	E	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP6	10:52	24.8	0.4	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP7	10:55	25.1	2.1	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP8	10:58	25.2	1.4	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP9	11:01	25.4	0.7	N	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP10	11:04	25.2	2.6	N	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP11	11:14	25.3	3.2	E	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP1	14:37	24.8	1.3	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP2	14:40	23.1	3.1	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP3	14:43	25.1	1.1	SW	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP4	14:46	24.8	2.3	E	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP5	14:49	24.0	2.2	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP6	14:52	24.6	3.1	S	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
14-Dec-21	Sunny	OP7	14:55	25.0	1.8	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP8	14:59	25.0	2.9	S	No	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP9	15:03	24.2	2.4	E	Yes	1	Acidic	Town gas	N/A
14-Dec-21	Sunny	OP10	15:08	24.6	1.3	SE	Yes	0	N/A	N/A	N/A
14-Dec-21	Sunny	OP11	15:20	24.7	1.4	E	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP1	18:07	24.3	0.8	S	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP2	18:10	24.1	0.4	S	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP3	18:15	23.7	0.5	E	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP4	18:19	23.4	0.9	E	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP5	18:24	23.1	2.3	E	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP6	18:29	23.2	0.6	NE	Yes	0	N/A	N/A	N/A
14-Dec-21	Fine	OP7	18:33	23.1	1.3	S	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP8	18:37	23.3	0.8	N	Yes	0	N/A	N/A	N/A
14-Dec-21	Fine	OP9	18:40	22.9	0.5	S	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP10	18:44	22.9	0.6	N	No	0	N/A	N/A	N/A
14-Dec-21	Fine	OP11	18:53	22.8	0.7	W	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP1	10:37	23.6	2.0	S	No	1	Grassy	Vegetation	N/A
15-Dec-21	Overcast	OP2	10:40	23.2	1.8	S	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP3	10:43	22.4	1.1	SW	No	1	Diesel	Generator	N/A
15-Dec-21	Overcast	OP4	10:46	22.1	2.5	E	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP5	10:50	22.4	3.8	E	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP6	10:55	22.2	3.4	SE	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP7	10:58	24.0	1.7	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP8	11:01	23.2	1.8	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP9	11:04	23.9	2.6	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP10	11:07	23.5	1.2	NW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP11	11:15	24.3	1.2	SW	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP1	14:33	23.2	0.4	N	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP2	14:36	23.8	0.5	S	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP3	14:39	23.4	0.6	N	Yes	1	Oil	Generator	N/A
15-Dec-21	Overcast	OP4	14:43	23.9	1.4	E	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP5	14:47	23.3	2.4	E	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP6	14:51	22.8	3.0	N	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP7	14:55	23.2	2.5	N	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP8	14:59	22.9	2.4	NE	Yes	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP9	15:02	23.5	2.3	N	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP10	15:05	23.6	0.9	N	No	0	N/A	N/A	N/A
15-Dec-21	Overcast	OP11	15:13	23.3	1.1	SE	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
15-Dec-21	Fine	OP1	18:25	21.9	0.2	S	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP2	18:29	21.7	0.3	S	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP3	18:34	21.5	0.6	E	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP4	18:38	21.6	1.8	E	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP5	18:41	22.1	2.7	NE	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP6	18:43	22.3	1.4	N	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP7	18:45	21.7	0.8	N	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP8	18:48	22.2	2.2	N	Yes	0	N/A	N/A	N/A
15-Dec-21	Fine	OP9	18:52	23.0	1.3	N	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP10	18:55	22.8	0.6	N	No	0	N/A	N/A	N/A
15-Dec-21	Fine	OP11	19:04	21.4	0.6	N	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP1	10:35	25.8	1.2	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP2	10:39	25.7	2.5	SW	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP3	10:43	25.9	0.6	N	Yes	1	Oil	Generator	N/A
16-Dec-21	Fine	OP4	10:47	25.4	3.2	E	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP5	10:51	25.3	3.6	E	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP6	10:54	25.4	1.1	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP7	10:58	25.6	0.9	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP8	11:01	25.5	2.4	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP9	11:04	25.4	2.2	N	No	1	Acidic	Town gas	N/A
16-Dec-21	Fine	OP10	11:07	25.6	1.8	N	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP11	11:17	25.9	3.3	SE	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP1	14:41	24.5	1.5	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP2	14:44	24.7	0.6	S	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP3	14:47	24.2	1.3	N	Yes	1	Oil	Generator	N/A
16-Dec-21	Overcast	OP4	14:51	24.8	1.2	E	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP5	14:54	25.2	2.2	E	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP6	14:57	24.6	1.6	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP7	15:01	24.3	2.6	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP8	15:05	25.7	1.5	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP9	15:08	24.6	1.1	N	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP10	15:11	25.6	1.0	N	No	0	N/A	N/A	N/A
16-Dec-21	Overcast	OP11	15:15	24.3	2.3	E	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP1	18:15	23.2	1.8	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP2	18:19	23.4	1.2	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP3	18:23	22.9	1.4	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP4	18:26	23.1	1.8	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP5	18:30	23.3	1.2	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
16-Dec-21	Fine	OP6	18:33	22.9	1.1	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP7	18:37	22.8	1.3	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP8	18:41	22.9	1.9	N	Yes	0	N/A	N/A	N/A
16-Dec-21	Fine	OP9	18:45	23.0	1.6	N	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP10	18:48	22.1	2.3	N	No	0	N/A	N/A	N/A
16-Dec-21	Fine	OP11	18:56	23.2	0.8	N	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP1	10:42	23.9	2.9	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP2	10:45	23.2	3.2	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP3	10:48	23.3	1.7	N	Yes	1	Oil	Generator	N/A
17-Dec-21	Fine	OP4	10:51	24.1	1.2	NE	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP5	10:54	23.5	0.6	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP6	10:57	23.2	4.1	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP7	11:00	23.1	3.7	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP8	11:04	23.2	4.2	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP9	11:06	22.9	3.5	N	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP10	11:08	23.5	0.7	N	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP11	11:21	24.2	0.7	E	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP1	14:37	22.3	4.0	NW	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP2	14:39	21.9	5.3	NW	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP3	14:42	22.9	2.1	NE	No	1	Diesel	Generator	N/A
17-Dec-21	Fine	OP4	14:45	22.8	2.5	NE	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP5	14:48	22.4	3.8	NE	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP6	14:50	22.1	3.5	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP7	14:55	22.6	4.8	NW	No	1	Burnt	Welding	N/A
17-Dec-21	Fine	OP8	14:59	22.8	2.6	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP9	15:02	22.2	2.2	N	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP10	15:04	22.9	0.7	N	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP11	15:12	21.6	5.1	E	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP1	18:20	21.1	7.2	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP2	18:23	21.4	1.8	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP3	18:27	21.3	3.1	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP4	18:30	21.4	0.8	NE	Yes	1	Acidic	Leachate Treatment Plant	N/A
17-Dec-21	Fine	OP5	18:33	21.2	3.2	E	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP6	18:37	21.1	4.2	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP7	18:41	21.3	3.4	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP8	18:44	21.0	4.3	N	Yes	0	N/A	N/A	N/A
17-Dec-21	Fine	OP9	18:47	21.9	2.2	N	No	0	N/A	N/A	N/A
17-Dec-21	Fine	OP10	18:51	22.0	1.9	NW	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
17-Dec-21	Fine	OP11	19:07	21.2	3.8	SE	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP1	10:50	19.1	4.3	N	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP2	10:54	20.2	3.0	N	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP3	10:59	22.0	2.2	SW	No	1	Oil	Generator	N/A
18-Dec-21	Sunny	OP4	11:03	23.6	1.2	E	No	1	Leachate	Leachate Treatment Plant	N/A
18-Dec-21	Sunny	OP5	11:07	21.2	4.1	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP6	11:11	19.3	2.7	N	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP7	11:15	19.2	2.4	N	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP8	11:19	19.3	1.8	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP9	11:23	19.4	2.5	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP10	11:27	21.2	1.6	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP11	11:40	20.8	2.1	E	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP1	14:40	21.9	2.1	N	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP2	14:44	22.2	1.3	NW	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP3	14:48	25.9	1.7	NE	No	1	Oil	Generator	N/A
18-Dec-21	Sunny	OP4	14:52	26.7	0.8	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP5	14:55	25.5	1.9	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP6	14:59	23.1	2.7	N	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP7	15:03	22.7	3.9	N	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP8	15:06	21.4	3.0	N	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP9	15:10	22.8	1.8	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP10	15:13	22.1	2.7	NW	No	0	N/A	N/A	N/A
18-Dec-21	Sunny	OP11	15:23	23.3	1.4	E	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP1	18:06	18.8	1.7	N	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP2	18:09	18.9	2.5	N	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP3	18:13	19.1	1.4	NW	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP4	18:17	19.0	2.1	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP5	18:20	19.4	0.7	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP6	18:24	19.7	2.1	N	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP7	18:28	19.3	2.3	N	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP8	18:32	19.1	2.2	NW	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP9	18:36	19.3	1.2	NW	No	0	N/A	N/A	N/A
18-Dec-21	Fine	OP10	18:39	19.6	0.5	NE	Yes	0	N/A	N/A	N/A
18-Dec-21	Fine	OP11	18:48	19.2	1.5	SE	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP1	10:34	19.6	1.6	NW	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP2	10:38	20.1	0.1	S	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP3	10:42	21.0	0.6	E	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP4	10:45	21.3	1.2	E	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
19-Dec-21	Sunny	OP5	10:48	21.7	1.3	NW	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP6	10:52	21.4	1.5	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP7	10:55	20.5	3.1	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP8	10:59	20.1	1.8	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP9	11:04	21.1	2.6	NW	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP10	11:07	21.9	1.1	NW	No	0	N/A	N/A	N/A
19-Dec-21	Sunny	OP11	11:13	21.9	2.3	E	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP1	15:52	20.7	0.9	S	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP2	15:47	20.6	1.4	S	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP3	15:43	20.6	1.6	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP4	15:39	20.9	2.1	E	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP5	15:34	22.4	1.8	SE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP6	15:29	22.1	1.1	SE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP7	15:24	20.9	4.3	N	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP8	15:20	21.1	3.8	N	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP9	15:15	20.7	0.8	NE	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP10	15:11	21.0	1.8	E	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP11	15:06	23.1	1.0	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP1	18:06	19.6	1.3	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP2	18:10	19.8	0.4	SE	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP3	18:13	19.8	0.5	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP4	18:17	20.0	0.8	E	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP5	18:21	19.7	1.7	E	No	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP6	18:24	19.6	1.4	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP7	18:28	19.8	1.5	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP8	18:32	19.5	1.2	N	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP9	18:36	19.9	1.2	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP10	18:40	19.8	1.3	NE	Yes	0	N/A	N/A	N/A
19-Dec-21	Overcast	OP11	18:49	19.9	0.5	SE	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP1	10:37	14.9	2.0	NW	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP2	10:38	14.9	1.0	NW	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP3	10:41	14.8	0.6	NE	No	1	Diesel	Generator	N/A
20-Dec-21	Shower	OP4	10:44	14.8	1.7	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP5	10:46	15.5	1.8	E	No	0	N/A	N/A	N/A
20-Dec-21	Shower	OP6	10:48	15.2	2.4	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP7	10:50	15.0	3.8	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP8	10:52	14.6	3.6	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Shower	OP9	10:54	14.7	1.6	N	No	0	N/A	N/A	N/A



Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
20-Dec-21	Shower	OP10	10:56	14.5	3.2	NE	No	0	N/A	N/A	N/A
20-Dec-21	Shower	OP11	11:03	15.2	1.3	E	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP1	14:33	15.3	2.0	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP2	14:37	15.6	0.8	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP3	14:40	16.2	0.4	NE	Yes	1	Oil	Generator	N/A
20-Dec-21	Overcast	OP4	14:43	15.9	1.4	E	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP5	14:46	14.8	1.2	E	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP6	14:48	15.1	2.1	NE	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP7	14:51	16.2	1.5	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP8	14:53	15.7	1.8	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP9	14:56	16.2	1.2	N	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP10	14:58	15.8	0.7	N	No	0	N/A	N/A	N/A
20-Dec-21	Overcast	OP11	15:07	16.1	1.0	E	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP1	18:05	15.6	1.3	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP2	18:09	15.8	0.2	S	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP3	18:12	15.1	0.5	S	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP4	18:16	15.3	0.8	E	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP5	18:20	15.7	0.5	E	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP6	18:23	15.1	1.2	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP7	18:26	15.3	1.6	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP8	18:30	15.6	1.2	N	Yes	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP9	18:33	16.0	0.4	N	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP10	18:37	15.7	0.5	N	No	0	N/A	N/A	N/A
20-Dec-21	Rainy	OP11	18:47	15.3	0.6	N	No	0	N/A	N/A	N/A
21-Dec-21	Shower	OP1	10:34	17.1	3.3	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP2	10:38	17.4	4.2	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP3	10:42	17.1	1.8	N	Yes	1	Oil	Generator	N/A
21-Dec-21	Shower	OP4	10:44	17.2	1.4	N	Yes	1	Acidic	Leachate Treatment Plant	N/A
21-Dec-21	Shower	OP5	10:47	17.0	1.8	NW	No	0	N/A	N/A	N/A
21-Dec-21	Shower	OP6	10:50	16.8	3.5	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP7	10:53	16.5	3.3	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Shower	OP8	10:55	16.8	2.3	N	Yes	1	Oil	Generator	N/A
21-Dec-21	Shower	OP9	10:57	17.9	0.9	N	No	0	N/A	N/A	N/A
21-Dec-21	Shower	OP10	11:00	17.1	1.8	N	No	0	N/A	N/A	N/A
21-Dec-21	Shower	OP11	11:09	17.5	1.5	E	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP1	14:58	19.7	0.9	NW	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP2	15:03	18.7	1.0	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP3	15:07	19.9	0.5	N	Yes	1	Oil	Generator	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
21-Dec-21	Overcast	OP4	15:11	20.0	1.1	E	No	1	Acidic Gas	Leachate Treatment Plant	N/A
21-Dec-21	Overcast	OP5	15:15	18.8	1.8	NW	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP6	15:19	18.6	1.8	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP7	15:22	18.1	1.7	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP8	15:25	18.8	0.8	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP9	15:30	18.4	2.6	NW	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP10	15:33	18.3	0.7	NW	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP11	15:43	18.4	1.1	E	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP1	18:45	17.5	0.8	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP2	18:48	17.4	0.9	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP3	18:50	17.0	1.2	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP4	18:52	17.2	0.7	E	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP5	18:55	16.9	0.7	E	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP6	18:59	17.0	2.9	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP7	19:02	17.9	2.5	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP8	19:05	17.5	1.2	N	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP9	19:09	17.8	0.3	N	No	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP10	19:13	18.0	1.4	NE	Yes	0	N/A	N/A	N/A
21-Dec-21	Overcast	OP11	19:23	18.1	3.4	E	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP1	10:38	19.3	2.4	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP2	10:41	19.7	2.8	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP3	10:45	19.8	1.5	NE	No	1	Oil	Generator	N/A
22-Dec-21	Overcast	OP4	10:48	19.7	1.2	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP5	10:52	19.8	1.9	N	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP6	10:54	20.4	2.8	N	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP7	10:57	20.5	2.4	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP8	11:00	20.5	2.3	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP9	11:04	20.8	2.4	N	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP10	11:09	20.9	1.4	N	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP11	11:22	22.3	2.1	SW	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP1	14:30	22.6	1.0	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP2	14:33	22.2	1.3	NW	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP3	14:36	23.6	0.5	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP4	14:38	23.4	1.4	E	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP5	14:41	22.3	1.0	E	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP6	14:43	22.3	0.9	S	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP7	14:46	22.7	0.9	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP8	14:49	22.7	0.8	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
22-Dec-21	Overcast	OP9	14:51	22.5	1.5	SE	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP10	14:54	22.6	0.9	NE	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP11	15:04	21.4	1.5	SE	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP1	18:20	18.5	1.1	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP2	18:24	18.5	0.7	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP3	18:28	18.1	2.1	W	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP4	18:31	18.9	0.4	W	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP5	18:34	18.7	1.3	E	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP6	18:37	18.3	2.4	N	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP7	18:40	18.6	1.7	N	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP8	18:44	18.5	1.4	NE	Yes	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP9	18:48	18.6	0.5	N	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP10	18:51	18.7	0.5	N	No	0	N/A	N/A	N/A
22-Dec-21	Overcast	OP11	19:10	18.4	1.2	NE	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP1	10:30	22.1	3.3	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP2	10:33	22.5	0.7	S	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP3	10:37	22.3	1.4	N	Yes	1	Oil	Electric Generator	N/A
23-Dec-21	Overcast	OP4	10:41	22.6	2.8	E	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP5	10:45	22.4	3.6	E	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP6	10:48	22.3	3.4	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP7	10:51	22.2	2.1	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP8	10:54	22.3	2.8	N	Yes	1	Oil	Electric Generator	N/A
23-Dec-21	Overcast	OP9	10:59	22.6	1.2	N	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP10	11:03	22.5	1.5	N	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP11	11:14	22.8	1.9	W	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP1	14:40	23.3	1.6	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP2	14:45	22.8	1.4	S	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP3	14:48	21.4	0.5	N	Yes	1	Oil	Electric Generator	N/A
23-Dec-21	Overcast	OP4	14:51	20.8	2.3	E	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP5	14:54	21.2	1.3	E	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP6	14:57	21.0	2.2	S	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP7	15:01	21.2	1.2	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP8	15:04	21.0	0.8	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP9	15:07	21.4	1.3	SE	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP10	15:11	21.5	0.4	N	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP11	15:23	21.9	0.7	NE	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP1	18:05	18.5	0.5	N	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP2	18:09	18.1	0.4	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind		From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
						Direction	Wind					
23-Dec-21	Overcast	OP3	18:13	17.6	0.4	N	N/A	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP4	18:17	17.8	0.6	E	N/A	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP5	18:20	18.0	0.7	E	N/A	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP6	18:24	18.1	0.7	E	N/A	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP7	18:27	18.2	0.6	N	N/A	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP8	18:31	18.3	0.4	N	N/A	Yes	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP9	18:35	18.0	0.6	N	N/A	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP10	18:40	17.8	0.5	N	N/A	No	0	N/A	N/A	N/A
23-Dec-21	Overcast	OP11	18:52	18.5	0.5	NE	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP1	10:40	20.3	0.4	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP2	10:44	20.0	0.0	N/A	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP3	10:47	19.9	0.6	N	N/A	Yes	1	Oil	Electric Generator	N/A
24-Dec-21	Overcast	OP4	10:50	20.1	0.7	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP5	10:54	20.0	0.9	E	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP6	10:58	20.1	0.4	S	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP7	11:02	19.7	0.6	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP8	11:05	19.9	0.8	N	N/A	Yes	1	Oil	Electric Generator	N/A
24-Dec-21	Overcast	OP9	11:08	20.4	0.0	N/A	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP10	11:12	21.0	0.9	N	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP11	11:22	20.5	1.3	E	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP1	14:38	22.0	0.0	N/A	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP2	14:41	21.6	1.2	S	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP3	14:43	22.3	0.7	SW	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP4	14:45	23.7	0.0	N/A	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP5	14:47	23.1	0.5	SW	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP6	14:49	22.3	1.3	S	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP7	14:52	22.1	2.2	S	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP8	14:55	22.9	0.9	S	N/A	No	1	Diesel	Generator	N/A
24-Dec-21	Overcast	OP9	14:58	22.1	1.3	S	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP10	14:59	22.1	1.9	S	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP11	15:07	22.2	0.0	N/A	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP1	18:00	19.0	0.4	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP2	18:03	19.1	0.0	N/A	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP3	18:07	19.4	0.0	N/A	N/A	N/A	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP4	18:10	18.8	0.4	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP5	18:14	18.7	0.2	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP6	18:17	18.8	0.3	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP7	18:21	18.5	0.7	N	N/A	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind		From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
						Direction	Direction					
24-Dec-21	Overcast	OP8	18:25	18.6	0.4	N	N/A	Yes	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP9	18:29	18.3	0.4	N	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP10	18:33	18.1	0.5	N	N/A	No	0	N/A	N/A	N/A
24-Dec-21	Overcast	OP11	18:44	17.6	0.6	E	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP1	11:00	20.5	1.3	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP2	11:03	20.7	2.3	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP3	11:07	20.2	2.9	W	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP4	11:10	21.1	3.9	E	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP5	11:14	21.3	3.5	E	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP6	11:17	21.1	4.1	E	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP7	11:20	22.7	1.4	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP8	11:23	22.9	1.4	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP9	11:25	22.8	1.2	N	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP10	11:28	22.3	1.6	NE	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Sunny	OP11	11:40	23.3	0.6	N	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP1	14:50	22.1	1.3	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP2	14:53	21.4	0.6	N	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP3	14:57	20.3	1.4	SW	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP4	15:00	20.0	1.3	E	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP5	15:04	19.8	3.2	E	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP6	15:08	19.7	1.8	N	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP7	15:12	20.6	1.4	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP8	15:16	20.8	1.5	N	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP9	15:20	20.1	1.4	N	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP10	15:23	20.2	0.6	N	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Overcast	OP11	15:35	19.5	0.9	S	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP1	18:00	19.5	0.6	N	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP2	18:03	18.8	0.7	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP3	18:07	18.2	0.4	N	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP4	18:10	18.1	0.5	E	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP5	18:13	18.0	0.6	E	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP6	18:15	17.8	1.0	S	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP7	18:18	17.5	0.9	N	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP8	18:21	17.5	0.6	N	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP9	18:25	17.4	1.8	E	N/A	Yes	0	N/A	N/A	N/A
25-Dec-21	Fine	OP10	18:29	17.5	1.9	N	N/A	No	0	N/A	N/A	N/A
25-Dec-21	Fine	OP11	18:41	17.2	2.9	NE	N/A	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP1	10:40	15.7	1.7	N	N/A	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
26-Dec-21	Overcast	OP2	10:43	16.6	1.3	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP3	10:47	16.5	1.2	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP4	10:51	16.7	1.4	E	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP5	10:54	15.6	2.3	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP6	10:58	16.0	1.7	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP7	11:02	16.1	2.7	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP8	11:06	15.7	3.7	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP9	11:10	15.2	2.0	N	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP10	11:13	15.8	3.1	N	No	0	N/A	N/A	N/A
26-Dec-21	Overcast	OP11	11:21	15.6	0.7	E	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP1	15:22	14.4	1.7	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP2	15:19	14.3	3.3	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP3	15:15	14.8	2.3	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP4	15:12	15.4	0.6	E	No	1	Acidic	Leachate Treatment Plant	N/A
26-Dec-21	Shower	OP5	15:07	14.9	1.9	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP6	15:03	15.1	1.4	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP7	14:59	14.8	2.6	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP8	14:55	14.9	3.3	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP9	14:51	15.2	2.3	N	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP10	14:47	15.7	2.1	N	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP11	14:39	15.4	1.1	E	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP1	18:02	13.2	2.8	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP2	18:06	13.3	4.2	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP3	18:11	13.2	1.4	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP4	18:14	13.1	2.4	NE	No	1	Acidic	Leachate Treatment Plant	N/A
26-Dec-21	Shower	OP5	18:17	13.0	3.3	E	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP6	18:21	12.9	4.3	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP7	18:25	12.5	5.1	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP8	18:29	12.4	6.3	N	Yes	0	N/A	N/A	N/A
26-Dec-21	Shower	OP9	18:33	12.3	2.7	N	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP10	18:37	12.4	3.5	N	No	0	N/A	N/A	N/A
26-Dec-21	Shower	OP11	18:46	12.2	1.1	E	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP1	10:50	13.0	2.2	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP2	10:53	14.0	1.2	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP3	10:56	14.1	1.7	NE	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP4	10:59	14.3	1.1	W	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP5	11:03	14.8	2.2	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP6	11:07	14.6	3.0	N	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
27-Dec-21	Overcast	OP7	11:10	13.3	2.7	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP8	11:14	12.8	4.9	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP9	11:17	13.7	1.7	N	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP10	11:21	13.8	3.2	N	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP11	11:34	14.4	0.8	SW	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP1	14:38	13.8	3.5	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP2	14:41	14.1	2.6	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP3	14:45	14.6	1.5	NE	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP4	14:48	14.8	1.7	E	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP5	14:52	14.4	1.9	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP6	14:55	14.5	2.4	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP7	14:59	14.1	2.6	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP8	15:02	14.4	2.0	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Fine	OP9	15:06	14.6	1.3	N	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP10	15:09	14.8	1.3	N	No	0	N/A	N/A	N/A
27-Dec-21	Fine	OP11	15:20	14.7	1.4	SW	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP1	18:05	12.2	1.8	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP2	18:08	12.3	1.7	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP3	18:11	12.1	2.3	NE	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP4	18:15	12.3	1.5	E	No	1	Leachate	Leachate Treatment Plant	N/A
27-Dec-21	Overcast	OP5	18:18	12.2	1.3	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP6	18:22	11.9	2.8	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP7	18:25	11.7	3.7	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP8	18:29	11.6	3.5	N	Yes	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP9	18:33	11.8	2.5	N	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP10	18:36	11.9	2.6	N	No	0	N/A	N/A	N/A
27-Dec-21	Overcast	OP11	18:48	11.4	2.3	E	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP1	10:30	16.5	2.8	N	Yes	0	N/A	N/A	N/A
28-Dec-21	Fine	OP2	10:33	16.7	1.6	N	Yes	0	N/A	N/A	N/A
28-Dec-21	Fine	OP3	10:36	16.8	2.3	E	No	1	Oil	Electric Generator	N/A
28-Dec-21	Fine	OP4	10:40	16.5	1.8	E	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP5	10:43	16.7	2.2	N	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP6	10:47	16.6	2.4	N	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP7	10:51	16.4	2.6	N	Yes	0	N/A	N/A	N/A
28-Dec-21	Fine	OP8	10:55	16.5	3.1	N	Yes	0	N/A	N/A	N/A
28-Dec-21	Fine	OP9	10:59	16.7	1.3	N	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP10	11:03	16.4	2.5	N	No	0	N/A	N/A	N/A
28-Dec-21	Fine	OP11	11:13	16.8	1.7	E	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind		From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
						Direction	Direction					
28-Dec-21	Overcast	OP1	14:43	19.9	1.3	S	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP2	14:48	18.1	2.7	S	No	1	Diesel	Vehicle	N/A	N/A
28-Dec-21	Overcast	OP3	14:51	19.3	0.4	SW	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP4	14:54	19.2	0.4	W	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP5	14:57	18.6	1.4	SE	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP6	15:00	18.3	2.5	S	No	1	Diesel	Vehicle	N/A	N/A
28-Dec-21	Overcast	OP7	15:03	19.8	2.5	S	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP8	15:06	21.3	0.9	SW	No	1	Sludge	Vehicle	N/A	N/A
28-Dec-21	Overcast	OP9	15:10	20.2	0.9	S	No	1	Town gas	Town gas plant	N/A	N/A
28-Dec-21	Overcast	OP10	15:12	19.7	0.7	S	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP11	15:21	19.3	1.1	SE	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP1	18:10	16.0	1.1	N	Yes	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP2	18:13	15.9	0.5	N	Yes	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP3	18:17	15.4	0.8	NE	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP4	18:21	15.5	0.8	E	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP5	18:25	15.6	1.2	E	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP6	18:29	15.5	1.2	N	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP7	18:33	15.4	0.8	N	Yes	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP8	18:37	15.2	1.3	N	Yes	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP9	18:41	15.2	1.1	N	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP10	18:45	15.4	1.0	N	No	0	N/A	N/A	N/A	N/A
28-Dec-21	Overcast	OP11	18:44	14.8	1.2	NE	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP1	10:37	23.4	0.4	NE	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP2	10:40	21.4	2.3	S	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP3	10:42	21.1	1.3	SW	No	1	Diesel	Generator	N/A	N/A
29-Dec-21	Fine	OP4	10:45	21.3	0.8	E	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP5	10:49	21.7	0.5	W	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP6	10:52	22.8	1.2	SE	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP7	10:55	22.3	0.8	NE	Yes	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP8	10:58	21.9	1.7	N	Yes	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP9	11:01	22.2	1.3	N	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP10	11:04	23.4	0.4	N	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Fine	OP11	11:12	21.8	2.4	SE	No	1	Soil/Sand	Ground	N/A	N/A
29-Dec-21	Sunny	OP1	14:31	23.1	2.1	S	No	0	N/A	N/A	N/A	N/A
29-Dec-21	Sunny	OP2	14:34	23.7	2.6	S	No	1	Oil	Vehicle	N/A	N/A
29-Dec-21	Sunny	OP3	14:37	24.1	1.6	N	Yes	0	N/A	N/A	N/A	N/A
29-Dec-21	Sunny	OP4	14:40	24.5	0.9	N	Yes	0	N/A	N/A	N/A	N/A
29-Dec-21	Sunny	OP5	14:44	23.5	0.8	W	No	0	N/A	N/A	N/A	N/A



Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
29-Dec-21	Sunny	OP6	14:48	23.0	1.3	S	No	1	Sludge	Sewer	N/A
29-Dec-21	Sunny	OP7	14:52	24.2	1.5	S	No	0	N/A	N/A	N/A
29-Dec-21	Sunny	OP8	14:55	24.6	1.6	S	No	0	N/A	N/A	N/A
29-Dec-21	Sunny	OP9	14:59	24.5	2.7	S	No	0	N/A	N/A	N/A
29-Dec-21	Sunny	OP10	15:03	25.4	1.4	S	No	0	N/A	N/A	N/A
29-Dec-21	Sunny	OP11	15:15	24.6	1.2	SW	Yes	0	N/A	N/A	N/A
29-Dec-21	Fine	OP1	18:00	18.6	0.6	N	Yes	0	N/A	N/A	N/A
29-Dec-21	Fine	OP2	18:03	18.3	0.4	N	Yes	0	N/A	N/A	N/A
29-Dec-21	Fine	OP3	18:07	17.9	0.5	NE	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP4	18:10	18.1	0.5	E	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP5	18:14	18.2	2.1	N	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP6	18:17	18.3	1.4	N	No	1	Diesel	Vehicle	N/A
29-Dec-21	Fine	OP7	18:21	17.9	1.7	N	Yes	1	Diesel	Vehicle	N/A
29-Dec-21	Fine	OP8	18:25	17.8	1.0	N	Yes	0	N/A	N/A	N/A
29-Dec-21	Fine	OP9	18:29	17.9	0.4	N	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP10	18:34	17.6	0.9	N	No	0	N/A	N/A	N/A
29-Dec-21	Fine	OP11	18:45	15.9	0.8	NE	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP1	10:35	18.5	3.1	N	Yes	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP2	10:39	18.7	0.8	N	Yes	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP3	10:42	18.6	0.4	S	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP4	10:45	18.4	2.1	E	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP5	10:48	18.5	3.8	E	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP6	10:52	18.8	1.2	N	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP7	10:55	19.0	1.2	N	Yes	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP8	10:59	19.1	1.6	N	Yes	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP9	11:03	19.0	1.4	N	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP10	11:06	19.2	0.6	N	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP11	11:16	19.4	1.6	E	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP1	14:35	21.1	1.4	W	Yes	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP2	14:39	22.7	1.3	S	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP3	14:43	22.2	0.9	SE	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP4	14:47	21.4	1.2	E	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP5	14:51	21.3	2.3	E	No	1	Oil	Excavator	N/A
30-Dec-21	Sunny	OP6	14:55	21.0	2.2	E	Yes	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP7	14:59	21.1	1.6	S	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP8	15:03	21.4	3.3	S	No	0	N/A	N/A	N/A
30-Dec-21	Sunny	OP9	15:08	21.3	1.1	E	Yes	1	Town gas	Town gas plant	N/A
30-Dec-21	Sunny	OP10	15:12	21.6	1.8	E	Yes	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
30-Dec-21	Sunny	OP11	15:23	21.1	1.5	E	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP1	18:00	18.2	0.6	NW	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP2	18:03	18.1	0.4	N	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP3	18:07	17.3	1.6	W	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP4	18:11	17.0	3.0	E	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP5	18:15	17.1	1.3	E	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP6	18:19	16.9	1.5	E	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP7	18:22	16.8	1.1	N	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP8	18:25	16.9	0.5	N	Yes	0	N/A	N/A	N/A
30-Dec-21	Fine	OP9	18:29	16.7	1.7	N	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP10	18:34	16.8	1.4	N	No	0	N/A	N/A	N/A
30-Dec-21	Fine	OP11	18:45	16.7	0.8	W	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP1	10:50	18.8	0.9	N	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP2	10:54	18.3	1.3	S	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP3	10:59	18.0	1.2	N	Yes	1	Oil	Generator	N/A
31-Dec-21	Overcast	OP4	11:04	18.1	3.1	E	No	1	Oil	Vehicle	N/A
31-Dec-21	Overcast	OP5	11:08	18.8	2.8	E	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP6	11:11	18.5	2.1	N	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP7	11:15	18.1	1.9	N	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP8	11:19	17.9	2.1	E	Yes	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP9	11:23	18.7	0.7	N	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP10	11:27	18.1	2.2	N	No	0	N/A	N/A	N/A
31-Dec-21	Overcast	OP11	11:38	18.0	1.9	E	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP1	14:40	20.9	0.5	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP2	14:43	18.4	3.6	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP3	14:46	19.0	1.9	SW	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP4	14:48	19.9	1.3	SE	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP5	14:51	20.1	2.8	NE	Yes	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP6	14:53	20.6	0.8	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP7	14:56	20.5	1.1	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP8	14:59	20.3	1.0	SW	No	1	Exhaust Gas	Vehicle	N/A
31-Dec-21	Sunny	OP9	15:03	21.0	1.0	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP10	15:05	19.7	1.1	S	No	0	N/A	N/A	N/A
31-Dec-21	Sunny	OP11	15:13	19.7	1.9	SE	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP1	18:05	15.6	1.5	N	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP2	18:08	15.7	0.6	N	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP3	18:11	15.4	0.9	SE	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP4	18:15	15.3	1.0	W	No	0	N/A	N/A	N/A

Date	Weather	Location	Time	Temperature (oC)	Wind Speed (m/s)	Wind Direction	From Project Site	Odour Intensity	Odour Characteristic	Possible Source	Remarks
31-Dec-21	Fine	OP5	18:19	15.1	1.4	E	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP6	18:23	15.0	1.3	N	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP7	18:26	15.2	1.1	W	No	0	N/A	N/A	N/A
31-Dec-21	Fine	OP8	18:30	15.3	1.7	E	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP9	18:34	15.4	1.5	SE	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP10	18:38	15.5	0.5	E	Yes	0	N/A	N/A	N/A
31-Dec-21	Fine	OP11	18:49	15.2	1.5	N	No	0	N/A	N/A	N/A

Annex D5

Thermal Oxidizer, Landfill  
Gas Flare and Landfill Gas  
Generator Stack Emission  
Monitoring Results

**Table D5.1 Thermal Oxidiser Stack Emission Monitoring Results**

Parameters	Monitoring Results
NO <sub>2</sub>	0.38 gs <sup>-1</sup>
CO	<0.02 gs <sup>-1</sup>
SO <sub>2</sub>	<0.01 gs <sup>-1</sup>
Benzene	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>
Vinyl chloride	<2 x 10 <sup>-5</sup> gs <sup>-1</sup>
Exhaust gas velocity	15.3 ms <sup>-1</sup>

**Table D5.2 Thermal Oxidiser Stack Continuous Monitoring Results**

Date	Gas Combustion Temperature (°C)	Exhaust temperature (K)	Exhaust gas velocity (ms <sup>-1</sup> ) <sup>(a)</sup>
01 Dec 21	945	1235	
02 Dec 21	938	1226	
03 Dec 21	984	1316	
04 Dec 21	941	1264	
05 Dec 21	941	1223	
06 Dec 21	944	1237	
07 Dec 21	936	1238	
08 Dec 21	939	1234	
09 Dec 21	949	1253	
10 Dec 21	955	1270	
11 Dec 21	936	1230	
12 Dec 21	932	1231	
13 Dec 21	948	1219	
14 Dec 21	952	1272	
15 Dec 21	942	1226	15.3
16 Dec 21	937	1222	
17 Dec 21	936	1224	
18 Dec 21	957	1221	
19 Dec 21	941	1226	
20 Dec 21	944	1230	
21 Dec 21	938	1241	
22 Dec 21	942	1219	
23 Dec 21	943	1230	
24 Dec 21	935	1223	
25 Dec 21	938	1229	
26 Dec 21	937	1223	
27 Dec 21	967	1287	
28 Dec 21	936	1223	
29 Dec 21	936	1225	
30 Dec 21	937	1221	
31 Dec 21	941	1228	
<b>Average</b>	943	1237	-
<b>Min</b>	932	1219	-
<b>Max</b>	984	1316	-

**Notes:**

(a) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring.

**Table D5.3 Landfill Gas Flare Stack Emission Monitoring Results**

Parameters	Monitoring Results
NO <sub>2</sub>	<0.02 gs <sup>-1</sup>
CO	2.81 gs <sup>-1</sup>
SO <sub>2</sub>	0.11 gs <sup>-1</sup>
Benzene	9.9 x 10 <sup>-5</sup> gs <sup>-1</sup>
Vinyl chloride	<1.4 x 10 <sup>-5</sup> gs <sup>-1</sup>
Exhaust gas velocity	9.1 ms <sup>-1</sup>

**Table D5.4 Landfill Gas Flare Stack Continuous Monitoring Results**

Date	Gas Combustion Temperature (°C)	Exhaust temperature (K)	Exhaust gas velocity (ms <sup>-1</sup> ) (a)	Operation Status
<b>Flare 1 - F601</b>				
01 Dec 21	-	-		Standby
02 Dec 21	935	1115		In Operation
03 Dec 21	-	-		Standby
04 Dec 21	-	-		Standby
05 Dec 21	-	-		Standby
06 Dec 21	-	-		Standby
07 Dec 21	-	-		Standby
08 Dec 21	-	-		Standby
09 Dec 21	-	-		Standby
10 Dec 21	-	-		Standby
11 Dec 21	-	-		Standby
12 Dec 21	-	-		Standby
13 Dec 21	850	1053		In Operation
14 Dec 21	864	1047	9.1	In Operation
15 Dec 21	854	1049		In Operation
16 Dec 21	820	1025		In Operation
17 Dec 21	-	-		Standby
18 Dec 21	-	-		Standby
19 Dec 21	-	-		Standby
20 Dec 21	-	-		Standby
21 Dec 21	-	-		Standby
22 Dec 21	-	-		Standby
23 Dec 21	-	-		Standby
24 Dec 21	-	-		Standby
25 Dec 21	-	-		Standby
26 Dec 21	-	-		Standby
27 Dec 21	-	-		Standby
28 Dec 21	859	1064		In Operation
29 Dec 21	-	-		Standby
30 Dec 21	-	-		Standby
31 Dec 21	-	-		Standby
<b>Average</b>	864	1059	-	
<b>Min</b>	820	1025	-	
<b>Max</b>	935	1115	-	
<b>Flare 2 - F602</b>				
01 Dec 21	892	984		In Operation
02 Dec 21	893	1097		In Operation
03 Dec 21	890	1053		In Operation
04 Dec 21	869	1065		In Operation
05 Dec 21	878	1085		In Operation
06 Dec 21	-	-		Standby
07 Dec 21	-	-		Standby

Date	Gas Combustion Temperature (°C)	Exhaust temperature (K)	Exhaust gas velocity (ms <sup>-1</sup> ) (a)	Operation Status
08 Dec 21	849	1016		In Operation
09 Dec 21	-	-		Standby
10 Dec 21	-	-		Standby
11 Dec 21	854	1037		In Operation
12 Dec 21	820	1045		In Operation
13 Dec 21	875	1078		In Operation
14 Dec 21	825	1027		In Operation
15 Dec 21	832	1026		In Operation
16 Dec 21	837	1038	9.1	In Operation
17 Dec 21	834	1014		In Operation
18 Dec 21	836	1079		In Operation
19 Dec 21	841	1078		In Operation
20 Dec 21	882	1007		In Operation
21 Dec 21	828	1038		In Operation
22 Dec 21	847	990		In Operation
23 Dec 21	829	976		In Operation
24 Dec 21	-	-		Standby
25 Dec 21	874	959		In Operation
26 Dec 21	857	949		In Operation
27 Dec 21	832	1025		In Operation
28 Dec 21	-	-		Standby
29 Dec 21	894	1040		In Operation
30 Dec 21	823	1021		In Operation
31 Dec 21	832	944		In Operation
<b>Average</b>	853	1027	-	
<b>Min</b>	820	944	-	
<b>Max</b>	894	1097	-	

**Notes:**

(a) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring.

**Table D5.5 Landfill Gas Generator Stack Emission Monitoring Results**

Parameters	Monitoring Results
NO <sub>2</sub>	0.007 gs <sup>-1</sup>
CO	0.046 gs <sup>-1</sup>
SO <sub>2</sub>	0.074 gs <sup>-1</sup>
Benzene	4 x 10 <sup>-6</sup> gs <sup>-1</sup>
Vinyl chloride	<1.2 x 10 <sup>-6</sup> gs <sup>-1</sup>
Exhaust gas velocity	17.6 ms <sup>-1</sup>

**Table D5.6 Landfill Gas Generator Stack Continuous Monitoring Results**

Date	Exhaust temperature (K)	Exhaust gas velocity (ms <sup>-1</sup> ) <sup>(a)</sup>	Operation Status (Landfill Gas Generator in Operation)
01 Dec 21	837		In Operation (ENGB)
02 Dec 21	837		In Operation (ENGB)
03 Dec 21	838		In Operation (ENGB)
04 Dec 21	843		In Operation (ENGB)
05 Dec 21	841		In Operation (ENGB)
06 Dec 21	843		In Operation (ENGB)
07 Dec 21	843		In Operation (ENGB)
08 Dec 21	844		In Operation (ENGB)
09 Dec 21	843		In Operation (ENGB)
10 Dec 21	847		In Operation (ENGA)
11 Dec 21	847	17.6	In Operation (ENGB)
12 Dec 21	843		In Operation (ENGB)
13 Dec 21	-		Under maintenance
14 Dec 21	843		In Operation (ENGB)
15 Dec 21	845		In Operation (ENGB)
16 Dec 21	846		In Operation (ENGB)
17 Dec 21	748		In Operation (ENGA)
18 Dec 21	-		Under maintenance
19 Dec 21	-		Under maintenance
20 Dec 21	842		In Operation (ENGB)
21 Dec 21	844		In Operation (ENGB)
22 Dec 21	841		In Operation (ENGB)
23 Dec 21	841		In Operation (ENGB)
24 Dec 21	841		In Operation (ENGB)
25 Dec 21	840		In Operation (ENGB)
26 Dec 21	838		In Operation (ENGB)
27 Dec 21	838		In Operation (ENGB)
28 Dec 21	838		In Operation (ENGB)
29 Dec 21	840		In Operation (ENGB)
30 Dec 21	841		In Operation (ENGB)
31 Dec 21	840		In Operation (ENGB)
<b>Average</b>	838	-	
<b>Min</b>	748	-	
<b>Max</b>	847	-	

**Notes:**

(a) The exhaust gas velocity was calculated based on the cross-section area of the stack and the gas flow and combustion temperature data measured during the stack emission monitoring.



Annex D6

# Investigation Reports of Environmental Quality Limit Exceedance

## Investigation Report of Environmental Quality Limit Exceedance

Project	South East New Territories (SENT) Landfill Extension
Date	13 December 2021
Time	9:00 (13 December 2021) – 9:00 (14 December 2021)
Monitoring Location	AM4
Parameter	24-hour Total Suspended Particulates (TSP)
Action / Limit Levels	Action level: >260 µg/ m <sup>3</sup> Limit level: >260 µg/m <sup>3</sup>
Measured Level	282 µg /m <sup>3</sup>
Possible reason	<p>From the meteorological data obtained from the SENTX on-site meteorological monitoring station, a predominantly easterly to east-southeasterly wind with highest wind speed 7.8m/s was recorded on 13 and 14 December 2021 during the sampling event. Occasional westerly to west-northwesterly wind was also recorded during the sampling event</p> <p>On 13 December 2021, dust emission from the public fill stockpiling areas and traffic emission from other project site n vicinity and located at the west of dust monitoring location AM4 were observed. The sample taken at AM4 on the day might not represent the operation dust emission from SENTX.</p> <p>In addition, no works which may lead to potential dust emission was conducted in the vicinity of dust monitoring location AM4 on the sampling day based on on-site observations and construction and operation activities as described by the Contractor. Environmental deficiency was not observed during the weekly site inspection on 9 December 2021. The Contractor has implemented the dust control and mitigation measures recommended in the updated EM&amp;A Manual.</p> <p>In accordance with Table 3.8b of the updated EM&amp;A Manual, repeat measurement was conducted on 19 December 2021 to confirm findings. 24-hour TSP level of 129 µg/m<sup>3</sup> (below Action and Limit Levels) was measured during the sampling event, which demonstrate no consecutive dust impact at AM4.</p> <p>Due to presence of the influencing factor other project sites and no potential source from the Project-related activities in the vicinity of AM4 which may lead to the high TSP level was identified, there is no adequate evidence showing that the TSP exceedance at AM4 was deemed to Project-related activities.</p>
Action Taken / Action to be Taken	Examination of environmental performance of the Project will be continued during the weekly inspections. The Contractor is reminded to implement relevant and appropriate mitigation

	<p>measures according to the updated EM&amp;A Manual to avoid any exceedance of the Action and Limit Levels.</p> <p>In addition, the Contractor was reminded to discuss the dust control measures with CEDD to minimize the dust impact from other project site to the SENTX boundary.</p>
Remarks	-

Prepared by: Abbey Lau

Designation: Environmental Team

Date: 10 January 2022

## Investigation Report of Environmental Quality Limit Exceedance

Project	South East New Territories (SENT) Landfill Extension
Date	17 December 2021
Time	11:00 - 11:30
Monitoring Location	Landfill Gas Flare 2 (F602)
Parameter	Carbon Monoxide (CO)
Limit Levels	>2.43 g/s
Measured Level	2.81 g/s
Possible reason	<p>As confirmed by the Contractor, Landfill Gas Flare 2 (F602) was under normal operating conditions during the sampling event. The landfill gas flare emission monitoring results (NO<sub>2</sub>, SO<sub>2</sub>, Benzene, Vinyl chloride, gas combustion temperature, exhaust temperature and exhaust gas velocity) at Landfill Gas Flare 2 (F602) on 17 December 2021 were well within the respective limit levels. It is possible that the slight exceedance of CO limit level measured on 17 December 2021 could be due to some short-term system instability (e.g. insufficient air, short gas residence time or ineffective mixing of landfill gas and air during the combustion) during the sampling event. Hence, the CO exceedance at Landfill Gas Flare 2 (F602) on 17 December 2021 is considered to be Project related.</p> <p>In accordance with Table 3.8b of the updated EM&amp;A Manual, repeat measurement was conducted on 12 January 2022 (it should be noted that the turnaround time of the laboratory analysis of the flue gas sample is 3 weeks and the results were available on 11 February 2022) to confirm findings. The CO concentration (0.032 g/s) measured on 12 January 2022 is well below Limit Level. There is no consecutive exceedance of CO concentrations in the flue gas emission of Landfill Gas Flare 2 (F602).</p> <p>It should also be noted that although the measured CO level exceeded the limit level of the EM&amp;A programme (which was set based on the stack design parameters), the slight exceedance of CO on 17 December 2021 will not cause adverse air quality impact to the identified ASRs as the anticipated CO concentrations at the identified ASRs will still be well below the respective AQO criteria with reference to the findings of the operational air quality impact assessment of the SENTX Environmental Review Report.</p>
Action Taken / Action to be Taken	Examination of environmental performance of the Project will be continued during the weekly inspections. The Contractor is reminded to closely monitoring the operating conditions of the flare to avoid any exceedance of the Action and Limit Levels.

Remarks	-
---------	---

Prepared by: Abbey Lau

Designation: Environmental Team

Date: 22 February 2022

Annex E

## Noise

Annex E1

## Noise Monitoring Results


**Table E1.1 Measured Noise Levels (dB(A)) at NM1 during Normal Working Hours (0700-1900 hours; Normal Weekdays)**

Date	Start Time	Finish Time	Weather	L <sub>10</sub> (30min)	L <sub>90</sub> (30min)	L <sub>eq</sub> (30min)
7 Oct 21	14:37	15:07	Sunny	58.5	52.0	56.4
15 Oct 21	NA	NA	Drizzle	Monitoring was cancelled due to adverse weather.		
21 Oct 21	15:05	15:35	Cloudy	56.0	52.5	54.5
28 Oct 21	14:43	15:13	Sunny	51.8	46.7	49.7
4 Nov 21	14:33	15:03	Sunny	53.5	48.0	52.5
11 Nov 21	15:08	15:38	Sunny	50.5	46.1	49.0
18 Nov 21	14:40	15:10	Sunny	52.5	46.3	50.6
25 Nov 21	14:49	15:19	Sunny	54.9	50.1	53.4
2 Dec 21	15:49	16:19	Sunny	50.5	48.0	49.7
9 Dec 21	15:21	15:51	Sunny	48.0	44.0	47.0
14 Dec 21	11:04	11:34	Sunny	52.2	49.8	51.0
22 Dec 21	15:36	16:06	Sunny	52.0	47.5	50.9
28 Dec 21	13:39	14:09	Sunny	52.5	49.0	51.1
<b>Average</b>						51.3
<b>Min</b>						47.0
<b>Max</b>						56.4

**Note:**

Correction of +3 dB(A) was made for free field measurements.

**Figure E1.1 Graphical Presentation for Noise Monitoring at NM1**

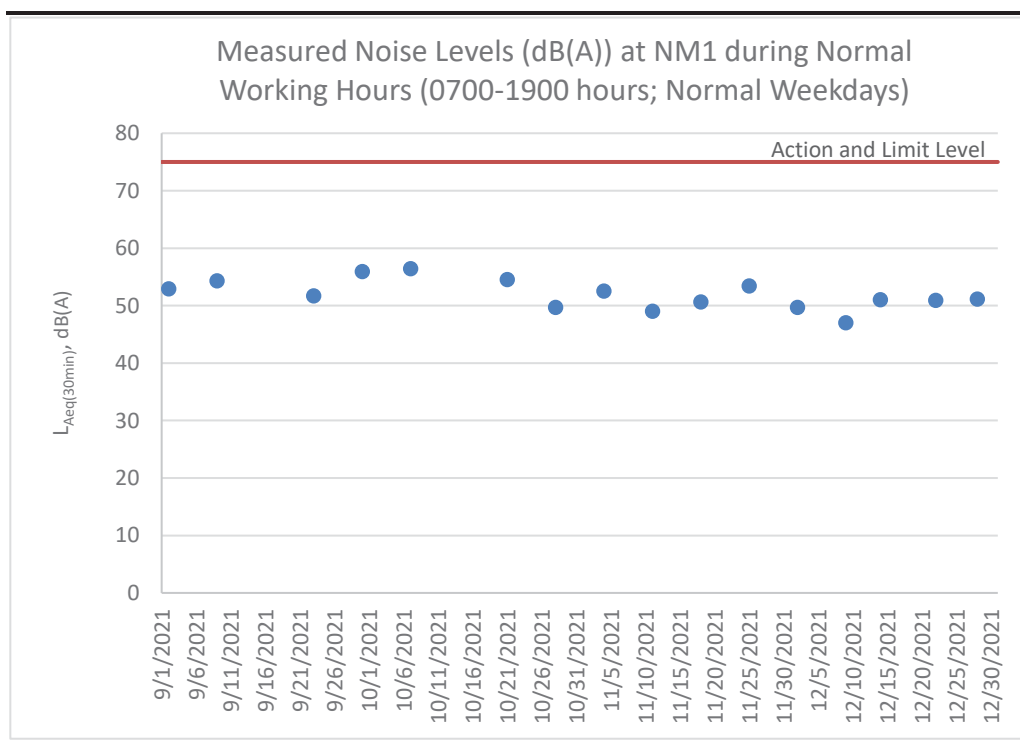



Annex E2

## Event and Action Plan for Noise Monitoring

## Annex E2 Event and Action Plan for Construction and Operational Noise Monitoring

Event	Action		
	ET	IEC	Contractor
Action Level	<ul style="list-style-type: none"> <li>Identify the source(s) and investigate the cause(s) of exceedance and complaint</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> </ul>
Limit Level	<ul style="list-style-type: none"> <li>Identify the source(s) and investigate the cause(s) of exceedance and complaint</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD whether the cause of exceedance is due to the Project</li> <li>Analyse the operation of SENTX and investigate the causes of exceedance</li> <li>Provide interim report to Contractor, IEC, Project Proponent and EPD the causes of the exceedances</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Report the remedial measures implemented and the additional monitoring results to Contractor, IEC, Project Proponent and EPD</li> <li>Have additional monitoring if exceedance is due to the Project. If exceedance stops, cease additional monitoring</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Take immediate measures to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC within 3 working days of notification</li> <li>Implement the agreed proposals</li> <li>Resubmit proposals if problem still not under control</li> <li>Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated</li> </ul>

Annex F

## Water Quality

Annex F1

## Surface Water Quality Monitoring Results

**Table F1.1 Surface Water Quality Monitoring Results at DP4T (During Construction Phase)**

Date	Time	Weather Condition	Water Appearance	Water Condition	Water Temperature (°C)	Dissolved Oxygen (DO) (mg/L)	pH	Suspended Solids (SS) (mg/L)	Remarks
7 Oct 21	14:23	Sunny		Unable to collect water sample due to insufficient flow					-
15 Oct 21	10:39	Rainy		Unable to collect water sample due to insufficient flow					-
21 Oct 21	14:48	Cloudy		Unable to collect water sample due to insufficient flow					-
28 Oct 21	14:25	Sunny		Unable to collect water sample due to insufficient flow					-
4 Nov 21	14:18	Sunny		Unable to collect water sample due to insufficient flow					-
11 Nov 21	14:18	Sunny	Light yellow	Semi clear	19.7	9.19	8.32	8.6	-
11 Nov 21	14:38	Sunny	Light yellow	Semi clear	19.3	9.21	7.96	8.7	DP4T (Duplicate)
18 Nov 21	15:20	Sunny		Unable to collect water sample due to insufficient flow					-
				<b>Average</b>	9.20		8.14	8.7	-
				<b>Min</b>	9.19		7.96	8.6	-
				<b>Max</b>	9.21		8.32	8.7	-

Notes: DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.

**Table F1.2 Surface Water Quality Monitoring Results at DP4T (During Operation Phase)**

Date	Time	Weather Condition	Water Appearance	Water Condition	Water Temperature (°C)	Ammoniacal-nitrogen (mg/L)	COD	Suspended Solids (SS) (mg/L)	Remarks
25 Nov 21	15:33	Sunny		Unable to collect water sample due to insufficient flow					-
28 Dec 21	10:46	Sunny		Unable to collect water sample due to insufficient flow					-
				<b>Average</b>	-				-
				<b>Min</b>	-				-
				<b>Max</b>	-				-

Notes: DP4 was temporary relocated to DP4 (Future, temporary) (i.e. DP4T) as an interim discharge point from the monitoring event on 16 May 2019.


**Table F1.3 Surface Water Quality Monitoring Results at DP6 (During Construction Phase)**

Date	Time	Weather Condition	Water Appearance	Water Condition	Water Temperature (°C)	Dissolved Oxygen (DO) (mg/L)	pH	Suspended Solids (SS) (mg/L)	Remarks
7 Oct 21	14:08	Sunny		Unable to collect water sample due to insufficient flow					-
15 Oct 21	11:02	Rainy		Unable to collect water sample due to insufficient flow					-
21 Oct 21	14:42	Cloudy		Unable to collect water sample due to insufficient flow					-
28 Oct 21	14:16	Sunny		Unable to collect water sample due to insufficient flow					-
4 Nov 21	14:00	Sunny		Unable to collect water sample due to insufficient flow					-
11 Nov 21	14:10	Sunny		Unable to collect water sample due to insufficient flow					-
18 Nov 21	15:16	Sunny		Unable to collect water sample due to insufficient flow					-
				<b>Average</b>	-	-	-	-	-
				<b>Min</b>	-	-	-	-	-
				<b>Max</b>	-	-	-	-	-


**Table F1.4 Surface Water Quality Monitoring Results at DP6 (During Operation Phase)**

Date	Time	Weather Condition	Water Appearance	Water Condition	Water Temperature (°C)	Ammoniacal-nitrogen (mg/L)	COD	Suspended Solids (SS) (mg/L)	Remarks
25 Nov 21	15:17	Sunny		Unable to collect water sample due to insufficient flow					-
28 Dec 21	10:42	Sunny		Unable to collect water sample due to insufficient flow					-
				<b>Average</b>	-	-	-	-	-
				<b>Min</b>	-	-	-	-	-
				<b>Max</b>	-	-	-	-	-


**Figure F1.1 Graphical Presentation for Surface Water Quality Monitoring (DO) (During Construction Phase)**

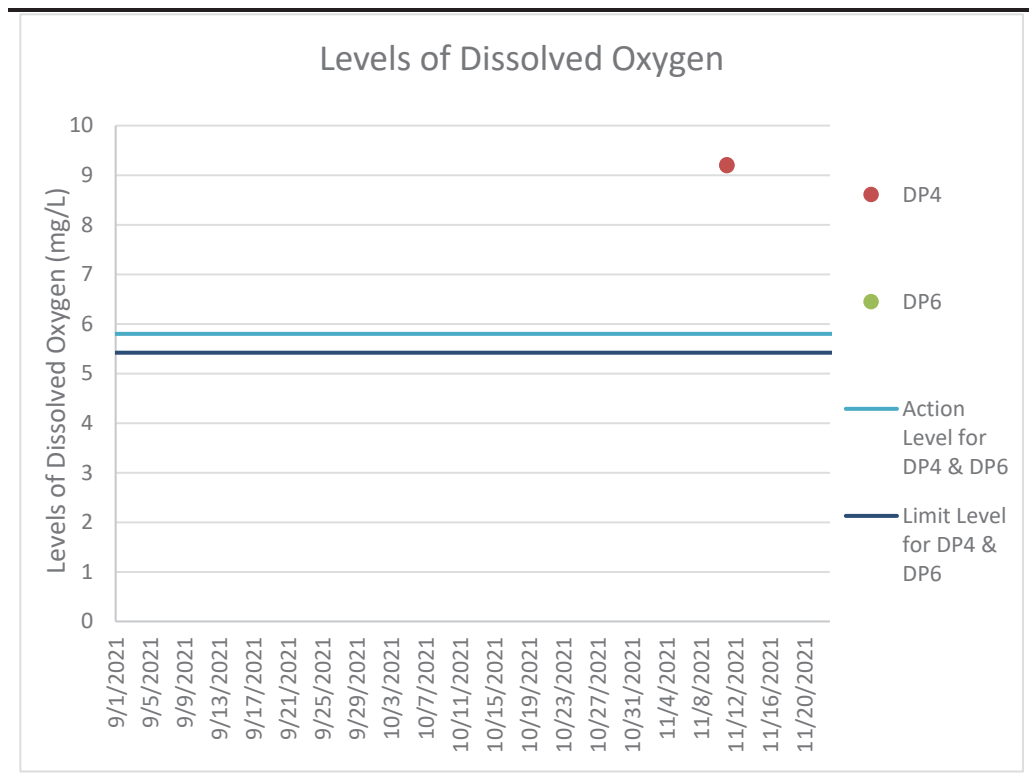

**Figure F1.2 Graphical Presentation for Surface Water Quality Monitoring (pH) (During Construction Phase)**

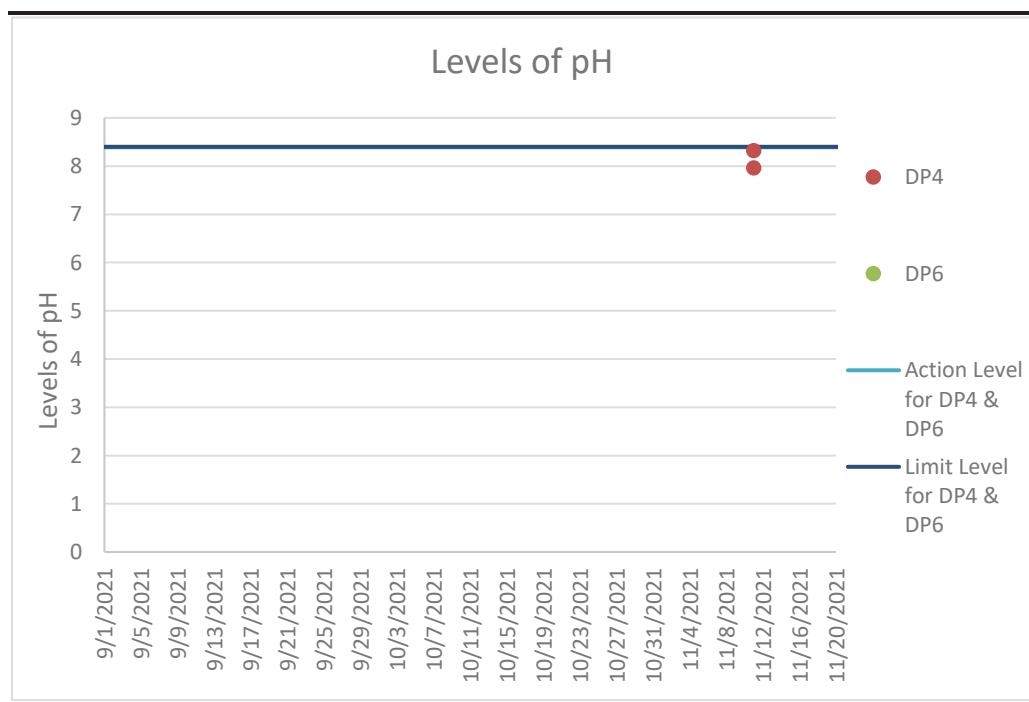

**Figure F1.3 Graphical Presentation for Surface Water Quality Monitoring (SS) (During Construction Phase)**

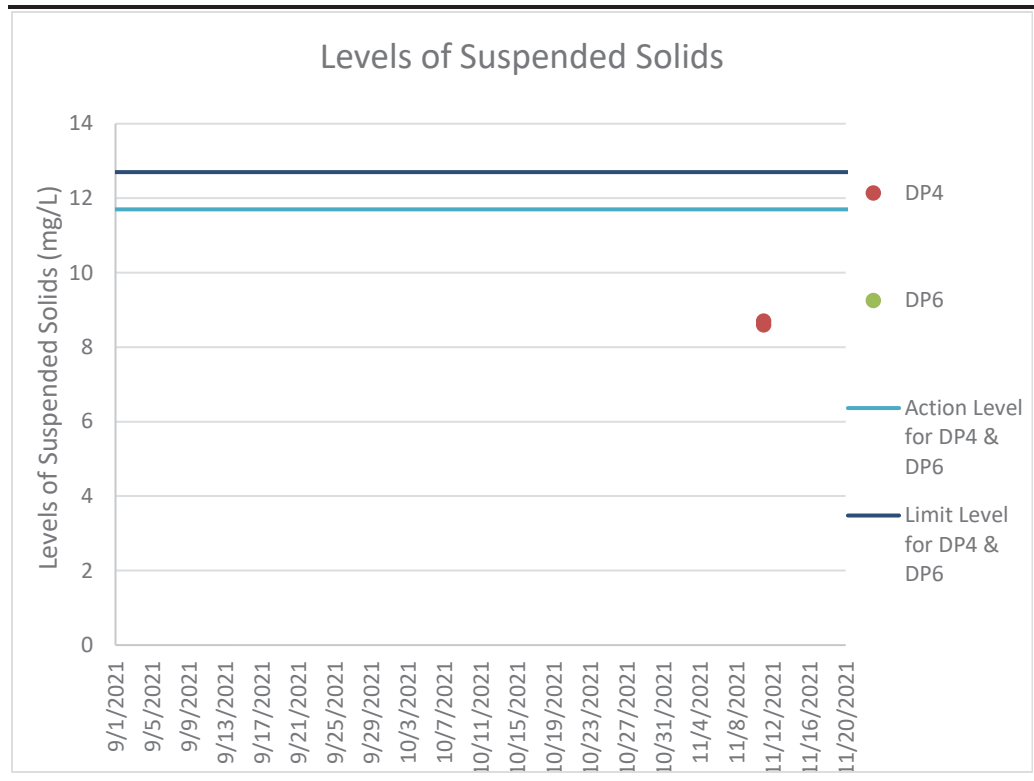



Annex F2

## Event and Action Plan for Water Quality Monitoring

## Annex F2a Event and Action Plan for Surface Water Quality During Construction Phase

Event	Action		
	ET	IEC	Contractor
Action Level being exceeded by one sampling day	<ul style="list-style-type: none"> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Repeat measurement on the next day of exceedance if exceedance is due to the Project</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> </ul>	<ul style="list-style-type: none"> <li>Rectify any unacceptable practice</li> <li>Amend working methods if appropriate</li> </ul>
Action Level being exceeded by two consecutive sampling days	<ul style="list-style-type: none"> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify the source(s) and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC and Project Proponent whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project and continue until no exceedance of Action Level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET Leader and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>

Event	Action		
	ET	IEC	Contractor
Limit Level being exceeded by two consecutive sampling days	<ul style="list-style-type: none"> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify source(s) of impact and cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Critically review the working methods</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and propose mitigation measures to the IEC</li> <li>Implement the agreed mitigation measures</li> </ul>
Limit Level being exceeded by more than two consecutive sampling days	<ul style="list-style-type: none"> <li>Repeat <i>in situ</i> measurement to confirm findings</li> <li>Identify source(s) of impact and cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure mitigation measures are implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project until no exceedance of Limit Level for two consecutive days</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Critically review the working methods</li> <li>Rectify unacceptable practice</li> <li>Check all plant and equipment</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and propose mitigation measures</li> <li>Implement the agreed mitigation measures</li> <li>As directed by the Project Proponent, slow down or stop all or part of the construction activities</li> </ul>

## Annex F2b Event and Action Plan for Water Quality Monitoring During Operation/Restoration Phase

Event	Action		
	ET	IEC	Contractor
Exceedance of Limit Level for surface water monitoring	<ul style="list-style-type: none"> <li>Identify source(s) of impact and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to weekly if exceedance is due to the Project until no exceedance of Limit Level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Take immediate action to avoid further exceedance</li> <li>Submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>
Exceedance of Limit Level for groundwater monitoring	<ul style="list-style-type: none"> <li>Identify source(s) of impact and investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to weekly if exceedance is due to the Project until no exceedance of Limit Level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check monitoring data submitted by ET</li> <li>Check Contractor's working methods</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Divert groundwater collected at the collection sumps to the leachate treatment plant</li> <li>Submit proposals for remedial measures to IEC</li> <li>Rectify any unacceptable practice or design</li> <li>Amend working methods as required</li> <li>Implement amended working methods, if necessary</li> </ul>

Event	Action		
	ET	IEC	Contractor
Exceedance of Limit Level for leachate level	<ul style="list-style-type: none"> <li>Investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operating activities and performance of the leachate collection system</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Check the performance of the leachate collection system</li> <li>Rectify any unacceptable practice;</li> <li>Amend leachate collection design if required</li> <li>Implement amended leachate collection system, if necessary</li> </ul>
Exceedance of Limit Level of effluent discharge from LTP	<ul style="list-style-type: none"> <li>Investigate the cause(s) of exceedance</li> <li>Prepare Notification of Exceedance within 24 hours</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Repeat measurement to confirm finding if exceedance is due to the Project</li> <li>Increase monitoring frequency to weekly until no exceedance of Limit Level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Check with Contractor on the operation performance of the LTP</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Rectify any unacceptable practice;</li> <li>Carry out remedial measures or amend design as required</li> <li>Implement amended design, if necessary</li> </ul>

Annex F3

## Leachate Levels Monitoring Results

**Table F3.1 Leachate Levels Monitoring Results (Pump Station No.1X (Cell 1X))**

Date	Meter No.X1 (cm)	Meter No.X2 (cm)	Average (cm)
<b>Pump Station No. 1X (Cell 1X)</b>			
21 Nov 21	79	99	89
22 Nov 21	79	99	89
23 Nov 21	79	99	89
24 Nov 21	79	99	89
25 Nov 21	44	64	54
26 Nov 21	46	66	56
27 Nov 21	50	70	60
28 Nov 21	50	70	60
29 Nov 21	50	70	60
30 Nov 21	50	70	60
01 Dec 21	53	73	63.0
02 Dec 21	53	73	63.0
03 Dec 21	53	73	63.0
04 Dec 21	55	75	65.0
05 Dec 21	57	75	66.0
06 Dec 21	57	75	66.0
07 Dec 21	57	77	67.0
08 Dec 21	57	75	66.0
09 Dec 21	86	10	48.0
10 Dec 21	84	102	93.0
11 Dec 21	84	104	94.0
12 Dec 21	90	111	100.5
13 Dec 21	111	90	100.5
14 Dec 21	62	82	72.0
15 Dec 21	68	82	75.0
16 Dec 21	64	84	74.0
17 Dec 21	64	84	74.0
18 Dec 21	66	86	76.0
19 Dec 21	88	68	78.0
20 Dec 21	88	68	78.0
21 Dec 21	70	91	80.5
22 Dec 21	44	64	54.0
23 Dec 21	46	66	56.0
24 Dec 21	46	66	56.0
25 Dec 21	53	73	63.0
26 Dec 21	53	73	63.0
27 Dec 21	53	73	63.0
28 Dec 21	55	75	65.0
29 Dec 21	57	77	67.0
30 Dec 21	59	79	69.0
31 Dec 21	82	100	91.0
<b>Average</b>	64	78	71
<b>Min</b>	44	10	48
<b>Max</b>	111	111	101

**Table F3.2 Leachate Levels Monitoring Results (Pump Station No.2X (Cell 2X))**


Date	Meter No.X1 (cm)	Meter No.X2 (cm)	Average (cm)
<b>Pump Station No. 2X (Cell 2X)</b>			
10 Dec 21	84	82	83.0
11 Dec 21	88	86	87.0
12 Dec 21	88	86	87.0
13 Dec 21	88	86	87.0
14 Dec 21	88	86	87.0
15 Dec 21	88	86	87.0
16 Dec 21	88	86	87.0
17 Dec 21	88	86	87.0
18 Dec 21	88	86	87.0
19 Dec 21	70	73	71.5
20 Dec 21	70	73	71.5
21 Dec 21	84	88	86.0
22 Dec 21	79	82	80.5
23 Dec 21	82	84	83.0
24 Dec 21	73	75	74.0
25 Dec 21	70	73	71.5
26 Dec 21	70	73	71.5
27 Dec 21	70	73	71.5
28 Dec 21	75	77	76.0
29 Dec 21	77	82	79.5
30 Dec 21	82	84	83.0
31 Dec 21	84	88	86.0
<b>Average</b>	81	82	81
<b>Min</b>	70	73	72
<b>Max</b>	88	88	87

**Table F3.3 Leachate Levels Monitoring Results (Pump Station No.3X (Cell 3X))**


Date	Meter No.X1 (cm)	Meter No.X2 (cm)	Average (cm)
<b>Pump Station No. 3X (Cell 3X)</b>			
23 Dec 21	90	90	90.0
24 Dec 21	97	97	97.0
25 Dec 21	84	84	84.0
26 Dec 21	84	84	84.0
27 Dec 21	84	84	84.0
28 Dec 21	95	95	95.0
29 Dec 21	99	99	99.0
30 Dec 21	79	79	79.0
31 Dec 21	86	86	86.0
<b>Average</b>	89	89	89
<b>Min</b>	79	79	79
<b>Max</b>	99	99	99




**Figure F3.1 Graphical Presentation for Leachate Levels Monitoring (Pump Station No.1X (Cell 1X))**

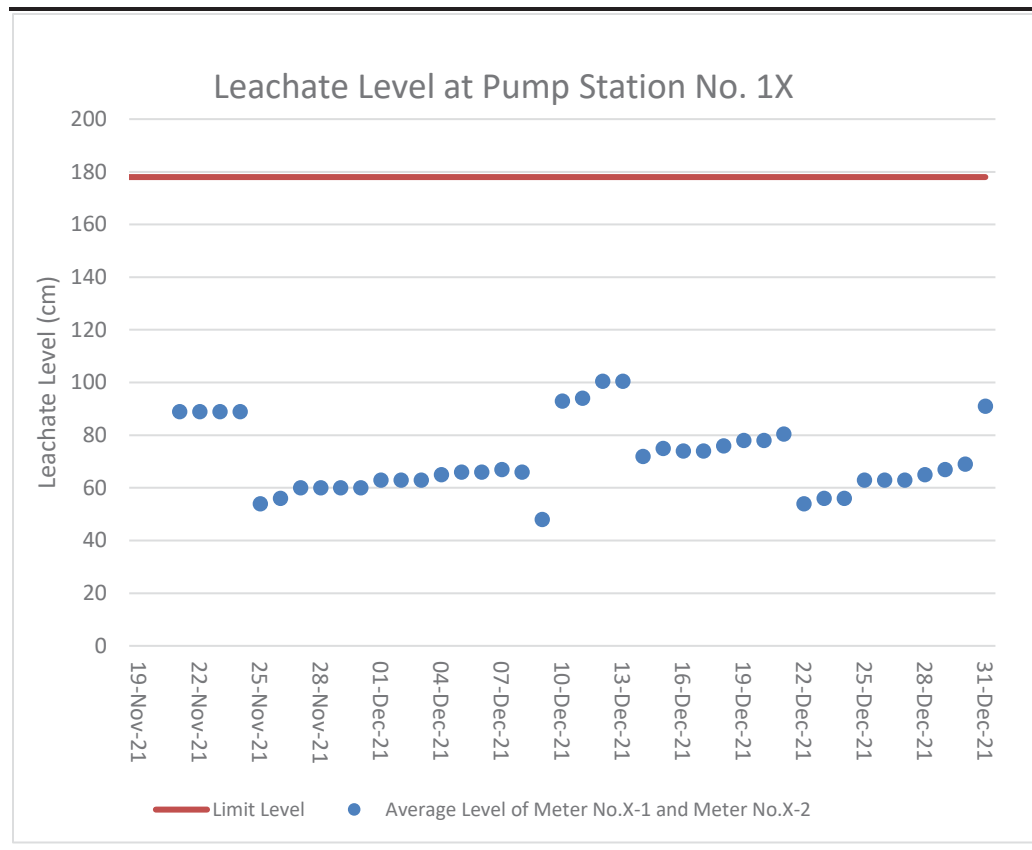

**Figure F3.2 Graphical Presentation for Leachate Levels Monitoring (Pump Station No.2X (Cell 2X))**

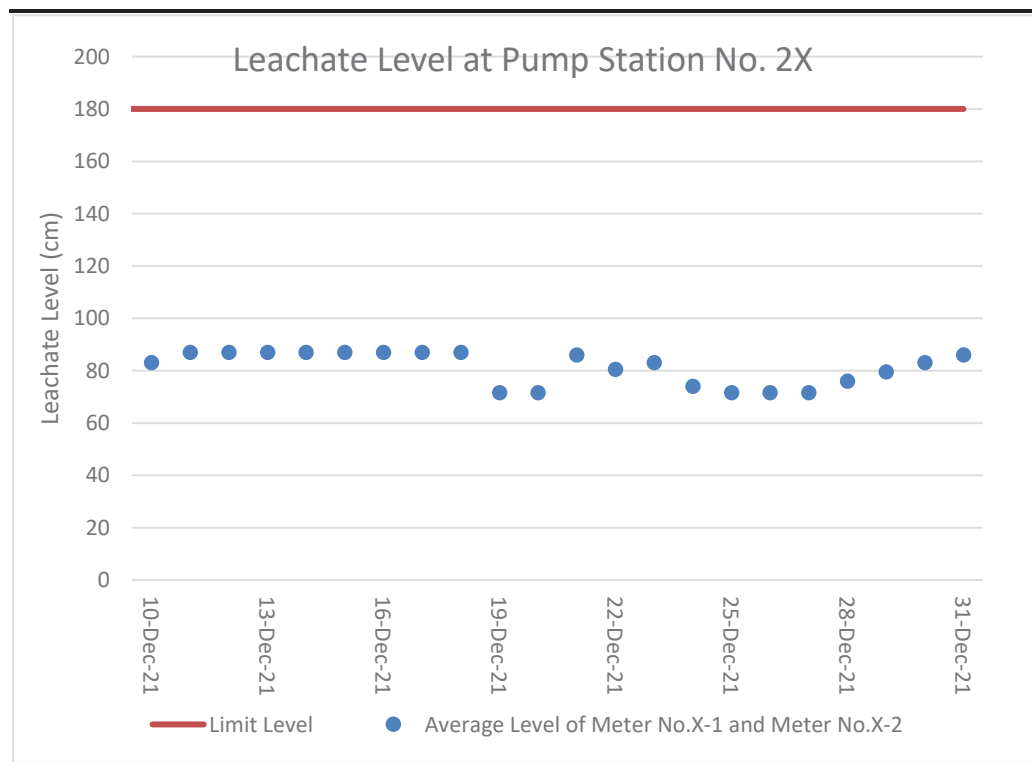

**Figure F3.3 Graphical Presentation for Leachate Levels Monitoring (Pump Station No.3X (Cell 3X))**

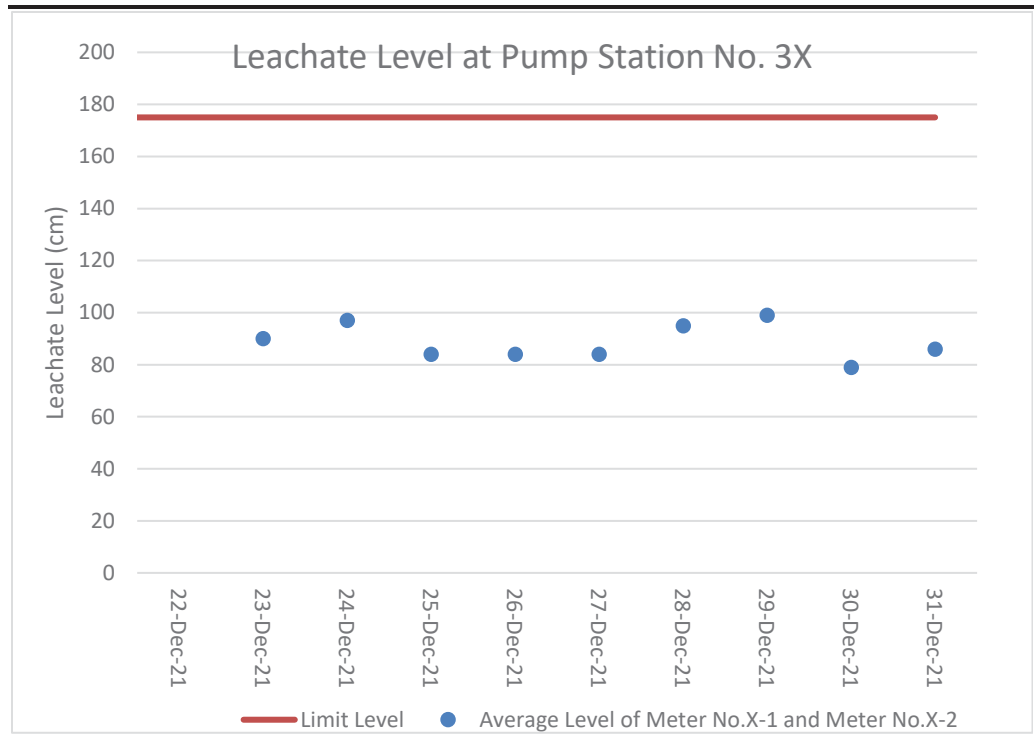

Annex F4

## Effluent Quality Monitoring Results

**Table F4.1 Effluent Monitoring Results**

	21 Nov 2021	22 Nov 2021	23 Nov 2021	24 Nov 2021	25 Nov 2021	26 Nov 2021	27 Nov 2021	28 Nov 2021	29 Nov 2021	30 Nov 2021
<b>On-site Measurements</b>										
Temperature	28.9	20.5	18.6	21.5	24.5	24.5	27.5	28.6	28.9	26.0
pH Value	8.4	8.4	8.5	8.4	8.4	8.4	8.5	8.4	8.4	8.3
Volume Discharged	987	301	910	1462	1264	1207	1332	900	486	961
<b>Laboratory Analysis</b>										
Suspended Solids (SS)	29.3	35.2	33.3	28.4	24.0	25.3	20.4	26.8	24.3	23.3
Alkalinity	2060	2140	2130	2140	2120	2130	2130	2120	2100	2160
Ammoniacal-nitrogen	0.33	0.49	0.3	0.3	0.28	0.36	0.31	0.33	0.32	0.84
Chloride	1860	1820	2160	2230	2150	2210	2210	2220	2230	2160
Nitrite-nitrogen	<0.10	0.38	0.04	0.15	0.05	<0.10	0.14	0.15	0.29	0.63
Phosphate	9.36	9.8	10.1	9.52	9.2	9.6	9.66	9.38	9.67	10.3
Sulphate	63	64	70	64	63	61	64	64	58	65
Total Nitrogen	115	110	95.7	90.4	98	109	112	113	112	102
Nitrate-nitrogen	68.5	65.8	50.5	46.4	53.3	64.6	66.8	67.8	69.6	54.6
Biochemical Oxygen Demand (BOD)	10	13	12	11	14	10	12	8	6	7
Chemical Oxygen Demand (COD)	904	888	888	970	921	929	937	1620	1090	1030
Oil & Grease	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5
<b>Total Organic Carbon</b>										
(TOC)	324	332	345	362	368	422	358	346	381	392
Boron	5130	5280	5450	5070	4900	5140	5260	5440	5500	5290
Calcium	15.4	15.4	16	15.3	16.6	16.1	15.4	15.9	15.5	16.1
Iron	1.28	1.36	1.53	1.56	1.47	1.37	1.32	1.43	1.32	1.45
Magnesium	12.1	12.4	13.3	13	13.8	13.4	13	13.5	13.4	13.3
Potassium	1070	1050	844	864	827	856	846	853	892	910
Cadmium	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chromium	120	123	123	132	128	128	123	124	122	134
Copper	<10	<10	<10	<10	<10	<10	11	<10	<10	<10
Nickel	116	116	112	117	113	116	112	111	110	115
Zinc	70	70	70	70	70	60	60	60	60	60

	1 Dec 21	2 Dec 21	3 Dec 21	4 Dec 21	5 Dec 21	6 Dec 21	7 Dec 21	8 Dec 21	9 Dec 21	10 Dec 21	11 Dec 21
<b>On-site Measurements</b>											
Temperature	26.3	25.7	25.8	25.4	24.8	25.3	25.4	26.1	24.8	28.1	28.8
pH Value	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4
Volume Discharged	1264	1193	1225	667	791	663	1149	1249	1401	1293	1139
<b>Laboratory Analysis</b>											
Suspended Solids (SS)	32.4	23	21.6	22.8	13.3	23.1	27.5	21.3	22.1	14.2	28
Alkalinity	2200	2180	2120	2130	2130	2160	2160	2200	2190	2130	2110
Ammoniacal-nitrogen	0.39	0.38	0.38	0.26	0.32	<0.10	<0.10	0.27	0.42	0.37	0.3
Chloride	2200	1770	1780	1640	1710	1710	1680	1660	1760	1750	1770
Nitrite-nitrogen	0.28	0.33	0.29	<0.10	0.36	0.3	0.19	0.18	0.21	0.23	0.16
Phosphate	10.2	9.28	10.2	10.5	9.27	10.1	10.3	9.7	9.58	9.98	9.89
Sulphate	66	60	61	65	59	61	64	66	62	63	62
Total Nitrogen	104	115	125	130	127	112	90.4	93.4	110	113	118
Nitrate-nitrogen	53.5	58	73	80.3	79.6	64.1	43	44.3	54.6	61	65.8
Biochemical Oxygen Demand (BOD)	10	11	11	24	9	9	12	11	7	7	9
Chemical Oxygen Demand (COD)	1230	1380	838	889	1430	923	973	913	785	938	823
Oil & Grease	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5
Total Organic Carbon (TOC)	394	424	359	348	372	409	344	360	357	348	343
Boron	5240	5440	4940	5240	5400	5180	5170	5030	5470	5170	4580
Calcium	15.5	16.1	14.6	18.0	15.0	15.9	15.2	15.4	14.3	14.1	15.8
Iron	1.51	1.58	1.33	1.67	1.51	1.74	1.65	1.43	1.41	1.37	1.44
Magnesium	13.1	13.4	12.1	15.2	13.2	13.9	13.5	12.6	12.8	12.6	14
Potassium	844	888	816	835	860	858	836	806	818	824	868
Cadmium	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chromium	137	140	122	112	130	131	127	120	128	130	123
Copper	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Nickel	117	120	107	98	114	112	107	108	113	115	106
Zinc	60	60	50	40	50	50	50	60	56	56	54

	12 Dec 21	13 Dec 21	14 Dec 21	15 Dec 21	16 Dec 21	17 Dec 21	18 Dec 21	19 Dec 21	20 Dec 21	21 Dec 21	22 Dec 21
<b>On-site Measurements</b>											
Temperature	29.5	26.6	26.2	27.8	30.6	27.6	23.9	27.6	22	21.7	27.3
pH Value	8.4	8.4	8.5	8.4	8.4	8.4	8.3	8.4	8.4	8.5	8.4
Volume Discharged	926	488	1170	1293	1201	1409	668	473	531	1195	1186
<b>Laboratory Analysis</b>											
Suspended Solids (SS)	13.6	20.3	22.7	18.1	21.7	23.5	23.1	33.8	14.4	23.9	16.3
Alkalinity	2120	2130	2190	2200	2210	2210	2200	2150	2160	2190	2170
Ammoniacal-nitrogen	0.3	0.42	0.32	0.36	0.32	0.35	0.32	0.34	0.75	0.35	0.18
Chloride	1780.0	1810	1860	2080	2090	1850	1850	1930	1960	1800	1770
Nitrite-nitrogen	0.2	0.31	0.18	0.19	0.2	0.19	0.28	0.18	0.7	0.26	0.22
Phosphate	9.8	10.6	10.4	10.4	10.7	10.3	10.8	10.9	11.2	11.5	10.5
Sulphate	61.0	67	63	68	64	68	64	66	70	66	61
Total Nitrogen	123.0	119	110	104	118	121	127	135	132	129	113
Nitrate-nitrogen	72.5	67.5	56.7	54.8	65.8	68.9	74.4	77.4	76.2	74.2	64.1
Biochemical Oxygen Demand (BOD)	8	11	13	11	12	11	8	12	10	10	8
Chemical Oxygen Demand (COD)	804	880	938	900	919	1070	919	976	981	1050	1020
Oil & Grease	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5
Total Organic Carbon (TOC)	347.0	359	351	348	356	352	397	374	398	386	387
Boron	4880.0	4660	4780	5040	5680	5540	5460	5590	5520	6050	5860
Calcium	15.0	14.8	17.1	14.4	15	13.6	13.1	13.1	12.7	14.1	17.7
Iron	1.3	1.42	1.54	1.29	1.35	1.32	1.28	1.41	1.26	1.53	1.56
Magnesium	13.5	13.1	14.7	12.7	12.7	12.1	11.5	11.6	11.5	13.9	14.5
Potassium	914.0	898	934	879	931	844	827	800	808	898	892
Cadmium	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chromium	131.0	130	130	128	138	137	141	146	138	135	138
Copper	<10	<10	<10	<10	<10	<10	<10	61	<10	<10	<10
Nickel	115.0	112	112	112	119	121	123	122	116	115	116
Zinc	56.0	59	58	55	61	56	57	100	48	54	62

	23 Dec 21	24 Dec 21	25 Dec 21	26 Dec 21	27 Dec 21	28 Dec 21	29 Dec 21	30 Dec 21	31 Dec 21
<b>On-site Measurements</b>									
Temperature	25.8	25.7	20.7	25.3	20	22.6	27.6	28.9	26.2
pH Value	8.4	8.5	8.4	8.5	8.5	8.5	8.4	8.4	8.5
Volume Discharged	934	957	1000	734	499	1120	1348	1435	1189
<b>Laboratory Analysis</b>									
Suspended Solids (SS)	14.3	14	17.4	13.9	10.1	11.6	15.7	26	14.8
Alkalinity	2110	2100	2120	2190	2190	2160	2200	2250	2210
Ammoniacal-nitrogen	0.15	0.34	0.24	0.28	0.46	0.41	0.38	0.28	0.3
Chloride	2030	2130	1880	1840	1950	1870	2070	2070	2050
Nitrite-nitrogen	0.19	0.18	0.15	0.15	0.33	0.16	0.16	0.14	0.16
Phosphate	9.85	9.8	10.2	9.33	10.1	10.2	8.2	7.67	8.56
Sulphate	57	65	67	74	78	82	88	90	92
Total Nitrogen	121	114	106	112	106	106	91.2	98.4	108
Nitrate-nitrogen	70.7	57	56.5	54.5	54.3	53	42.4	47.6	57
Biochemical Oxygen Demand (BOD)	8	6	7	7	7	6	8	9	7
Chemical Oxygen Demand (COD)	1020	973	973	973	920	1130	1040	989	1010
Oil & Grease	<5	<5	<5	<5	<5	<5	<5	<5	<5
Total Organic Carbon (TOC)	338	340	368	362	394	340	335	359	388
Boron	4530	4660	4700	4750	4950	4920	4810	4830	5350
Calcium	17.5	16.8	14.6	15.9	14.9	16.1	17.6	17.6	17.8
Iron	1.39	1.33	1.21	1.37	1.32	1.32	1.58	1.61	1.43
Magnesium	13.6	13	11.3	13.8	14	15.4	21.2	22.1	20.3
Potassium	854	865	759	847	857	848	885	885	824
Cadmium	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chromium	124	120	128	124	124	119	127	130	125
Copper	24	<10	<10	<10	<10	<10	<10	<10	<10
Nickel	101	98	116	116	119	114	120	124	112
Zinc	68	58	54	58	57	58	54	58	54

Annex F5

## Groundwater Monitoring Results



**Table F5.1 Groundwater Monitoring Results**

Parameters	Units	MWX-1	MWX-2	MWX-3	MWX-4	MWX-5	MWX-6	MWX-7	MWX-8	MWX-9	MWX-10	MWX-11	MWX-12	MWX-13	MWX-14
Water Level	mPD	2.70	2.84	2.79	2.69	2.71	2.65	2.42	2.53	2.89	2.93	3.23	6.62	36.50	45.13
Bicarbonate Alkalinity as CaCO3	mg/L	138	309	147	<1	<1	<1	8	<1	75	167	135	60	15	8
Carbonate Alkalinity as CaCO3	mg/L	<1	<1	<1	100	98	164	58	75	10	<1	<1	<1	<1	<1
Total Alkalinity as CaCO3	mg/L	138	309	147	129	118	200	66	114	85	167	135	60	15	8
pH Value	pH Unit	8.3	7.9	8	10.7	10.6	10.8	9.8	10.7	8.6	7.9	8.1	7	5.5	5.3
Electrical Conductivity @ 25Å°C	µS/cm	747	799	1110	1110	1130	1160	2330	3050	1550	863	372	319	95	97
Ammonia as N	mg/L	0.29	0.02	1.33	6.79	1.95	3.52	5.42	12.5	5.34	0.03	0.02	<0.01	0.04	<0.01
Chloride	mg/L	116	29	197	246	193	177	681	1010	372	133	26	22	16	20
Nitrite as N	mg/L	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Reactive Phosphorus as P	mg/L	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	0.01	0.02	0.02	0.02	0.04	<0.01	<0.01
Sulphate as SO4 - Turbidimetric	mg/L	54	91	95	54	131	91	66	38	111	74	13	57	3	2
Sulphide as S2-	mg/L	0.1	<0.1	<0.1	7.7	3.1	9.6	1.8	11.8	0.3	<0.1	<0.1	<0.1	<0.1	<0.1
Total Kjeldahl Nitrogen as N	mg/L	0.4	0.2	1.7	7.4	2.6	4.8	5.9	12.9	6	<0.1	0.1	<0.1	0.4	0.2
Nitrate as N	mg/L	<0.01	0.35	<0.01	<0.01	<0.01	<0.01	0.01	0.01	<0.01	<0.01	<0.01	<0.01	0.12	0.1
Total Nitrogen as N	mg/L	0.4	0.5	1.7	7.4	2.6	4.8	5.9	12.9	6	<0.1	0.1	<0.1	0.5	0.3
Boron	µg/L	120	210	180	160	170	180	480	540	380	90	50	20	10	10
Calcium	mg/L	37.6	52.1	74.4	48.8	40.4	30.8	26.3	59.9	31.8	74.3	46.5	29.5	2.3	1.53
Mercury	µg/L	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20
Magnesium	mg/L	5.22	47.4	5.64	<0.05	<0.05	<0.05	1.01	0.12	12.4	7.03	2.5	4.62	1.02	1.04
Sodium	mg/L	85.7	28.8	111	128	141	154	419	488	233	83.3	25	27	14.1	12.9
Iron	mg/L	<0.04	<0.04	0.21	<0.04	<0.04	<0.04	<0.04	<0.04	<0.04	<0.04	<0.04	0.38	<0.04	<0.04
Potassium	mg/L	20.1	9.99	27.8	34.6	51.9	55.9	57.8	54.8	36.9	11.4	6.45	3.21	4.25	4.06
Cadmium	µg/L	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
Chromium	µg/L	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1
Copper	µg/L	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1
Lead	µg/L	<1	<1	<1	<1	<1	3	<1	<1	<1	<1	<1	<1	<1	<1
Manganese	µg/L	417	216	956	2	<1	<1	<1	<1	8	1090	363	800	36	9
Nickel	µg/L	<1	<1	<1	2	1	2	<1	1	<1	<1	<1	<1	<1	<1
Zinc	µg/L	<10	260	<10	<10	<10	<10	<10	<10	<10	<10	<10	360	20	<10
Biochemical Oxygen Demand	mg/L	<2	<2	<2	<2	<2	7	<2	8	2	<2	<2	<2	<2	<2
Chemical Oxygen Demand	mg/L	11	3	19	36	28	56	23	44	20	6	4	<2	<2	<2
Total Organic Carbon	mg/L	6	4	9	11	10	13	8	11	9	4	4	4	4	4

Figure F5.1 Graphical Presentation for Groundwater Monitoring (MWX-1)

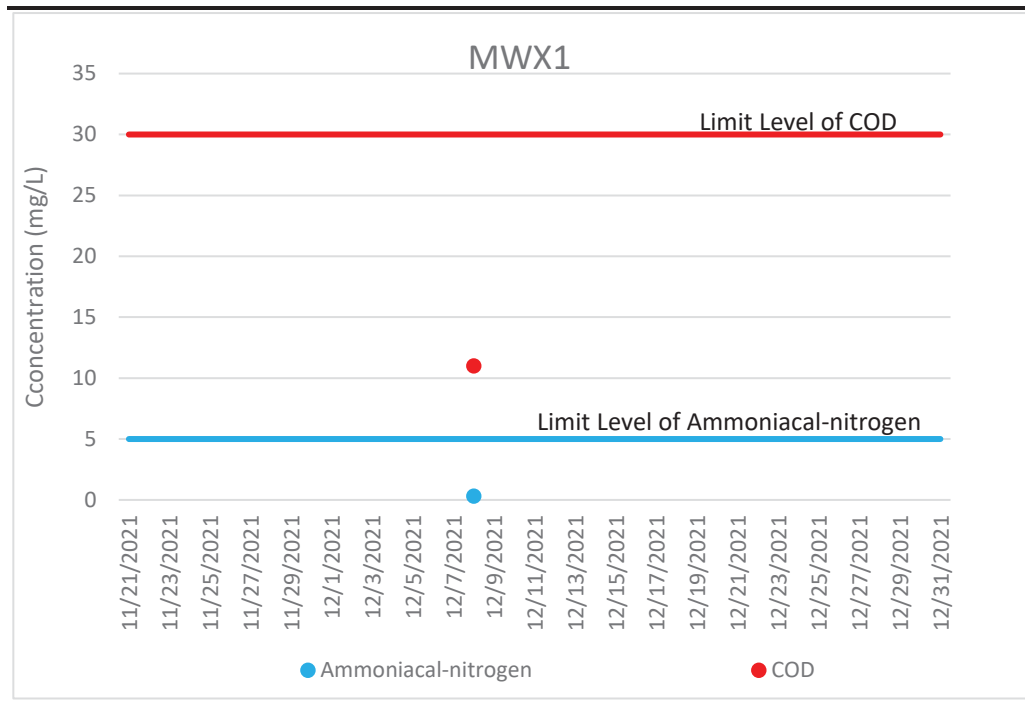


Figure F5.2 Graphical Presentation for Groundwater Monitoring (MWX-2)

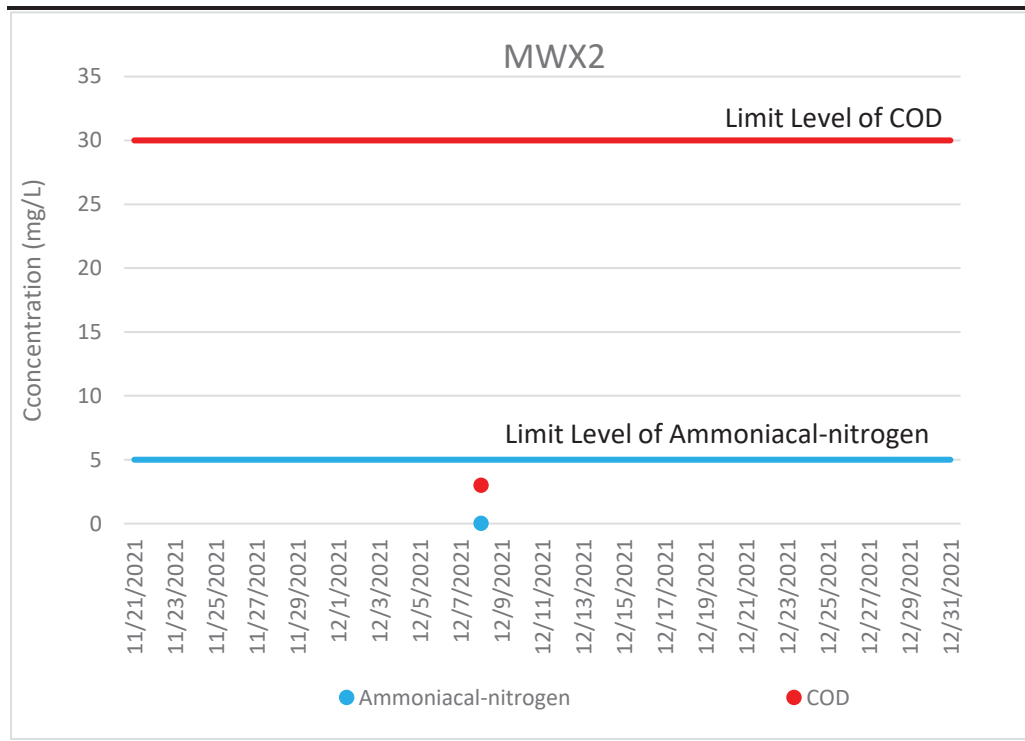


Figure F5.3 Graphical Presentation for Groundwater Monitoring (MWX-3)

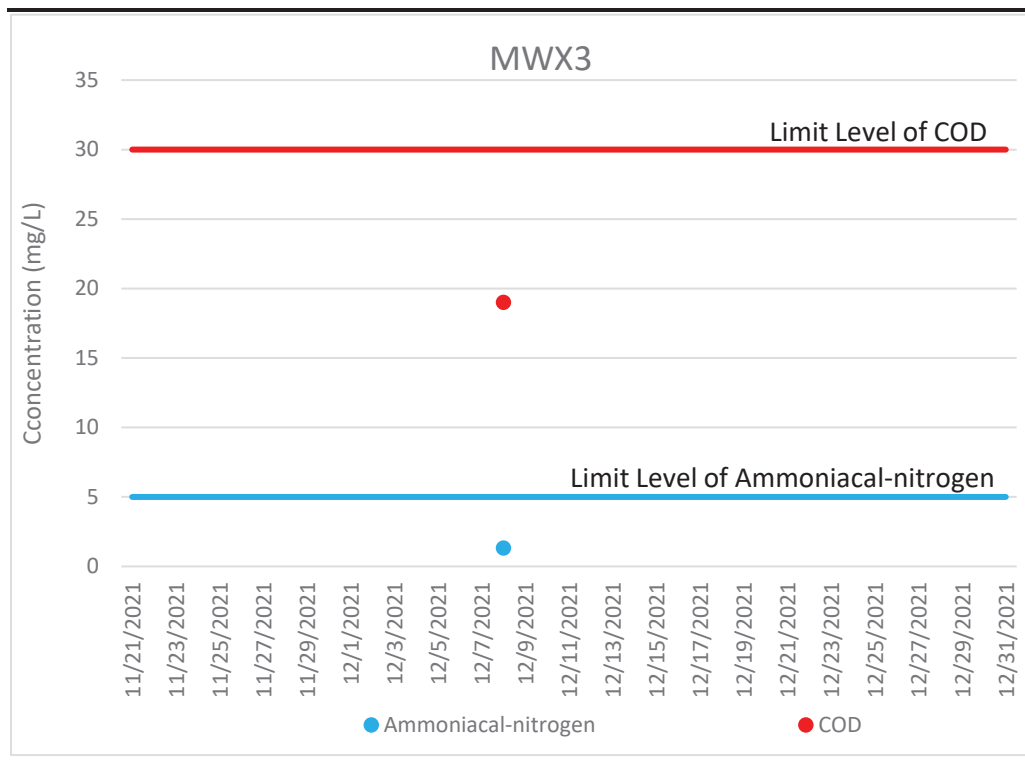


Figure F5.4 Graphical Presentation for Groundwater Monitoring (MWX-4)

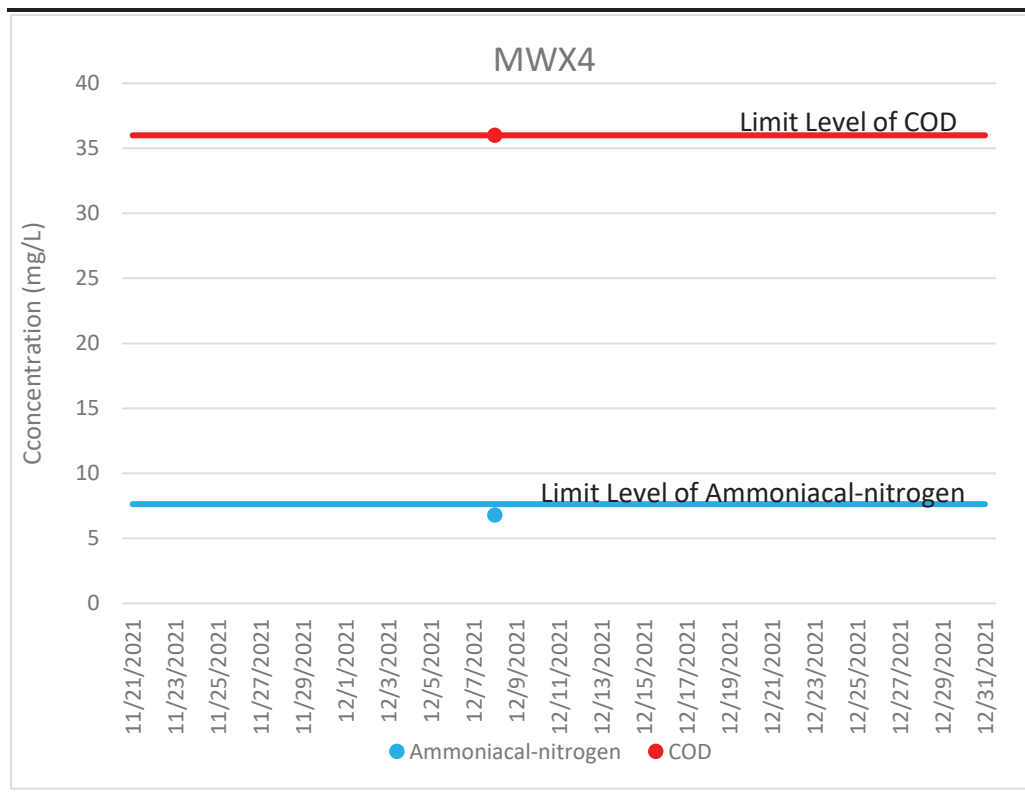


Figure F5.5 Graphical Presentation for Groundwater Monitoring (MWX-5)

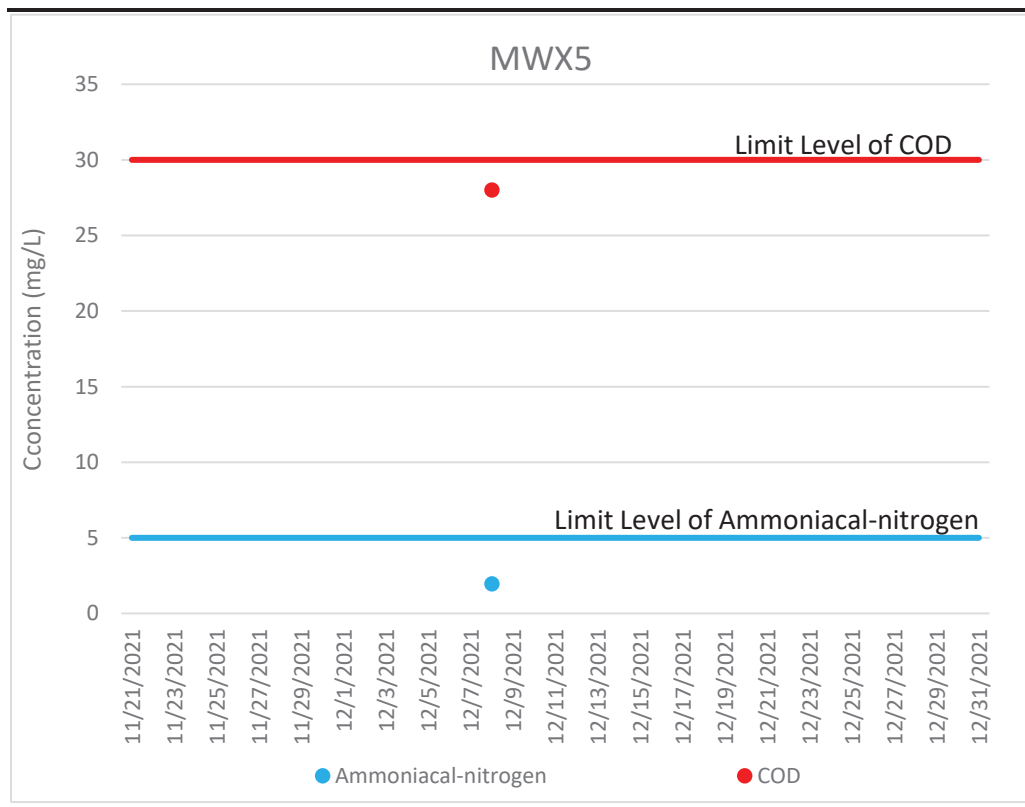


Figure F5.6 Graphical Presentation for Groundwater Monitoring (MWX-6)

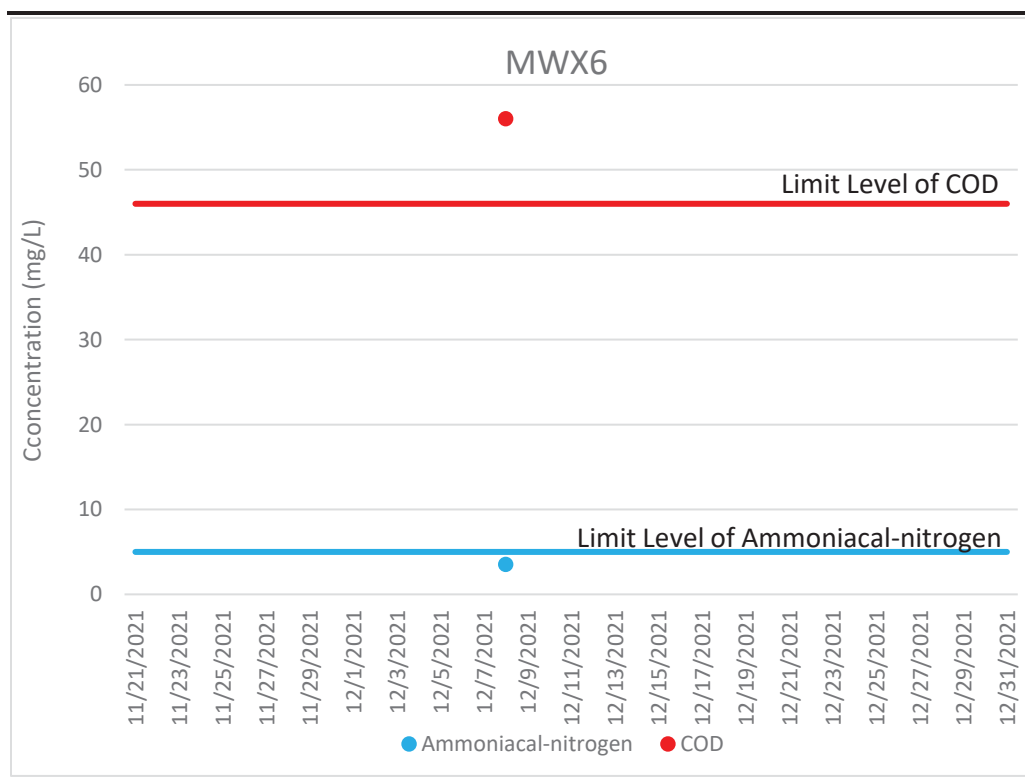


Figure F5.7 Graphical Presentation for Groundwater Monitoring (MWX-7)

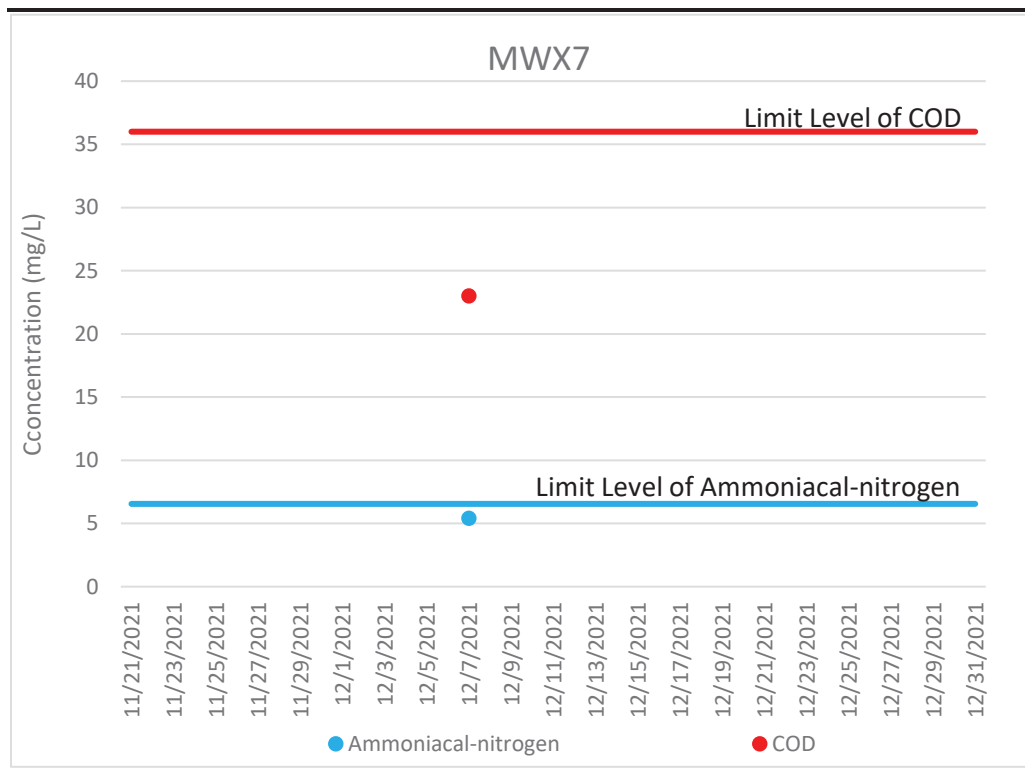


Figure F5.8 Graphical Presentation for Groundwater Monitoring (MWX-8)

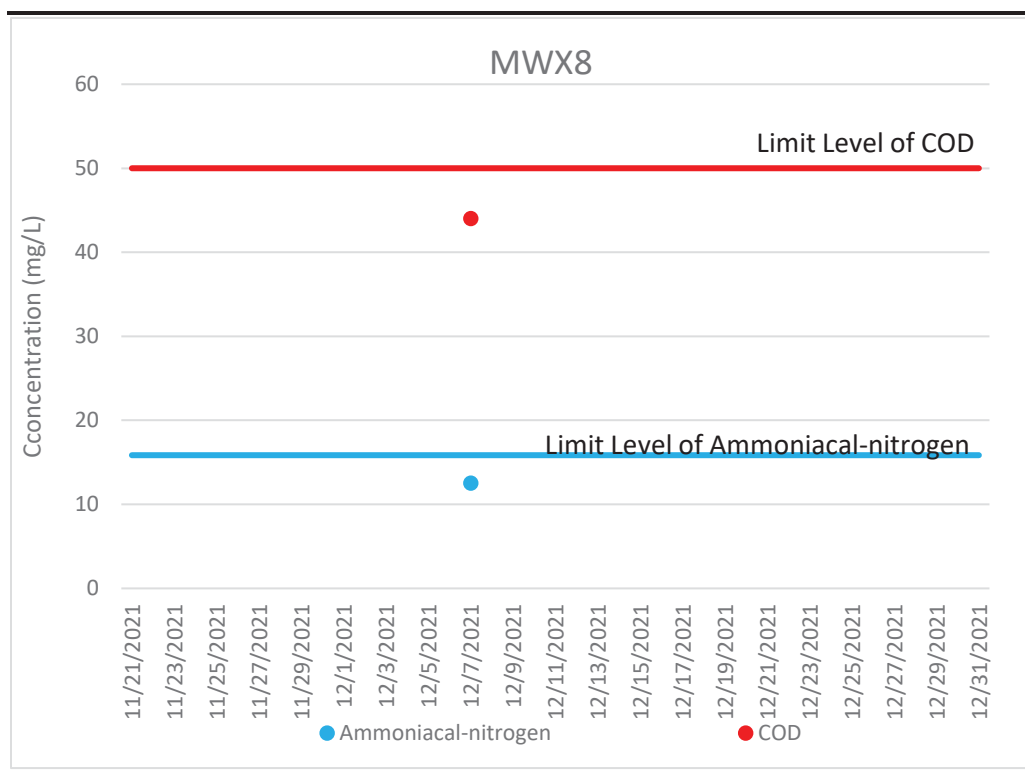


Figure F5.9 Graphical Presentation for Groundwater Monitoring (MWX-9)

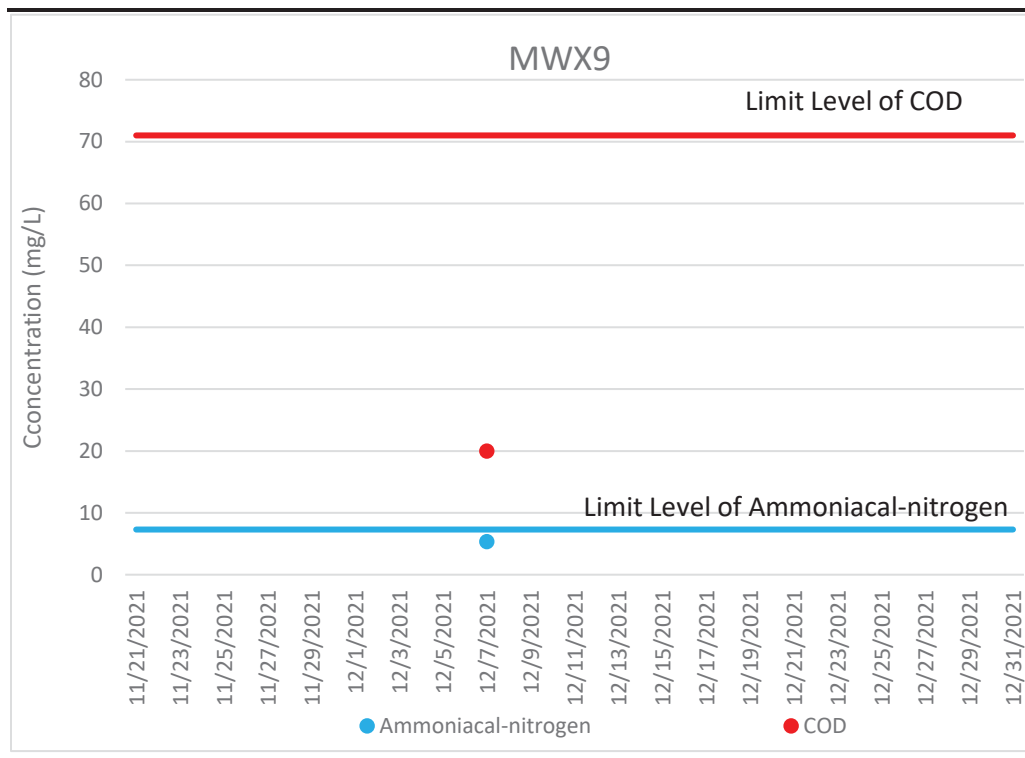


Figure F5.10 Graphical Presentation for Groundwater Monitoring (MWX-10)

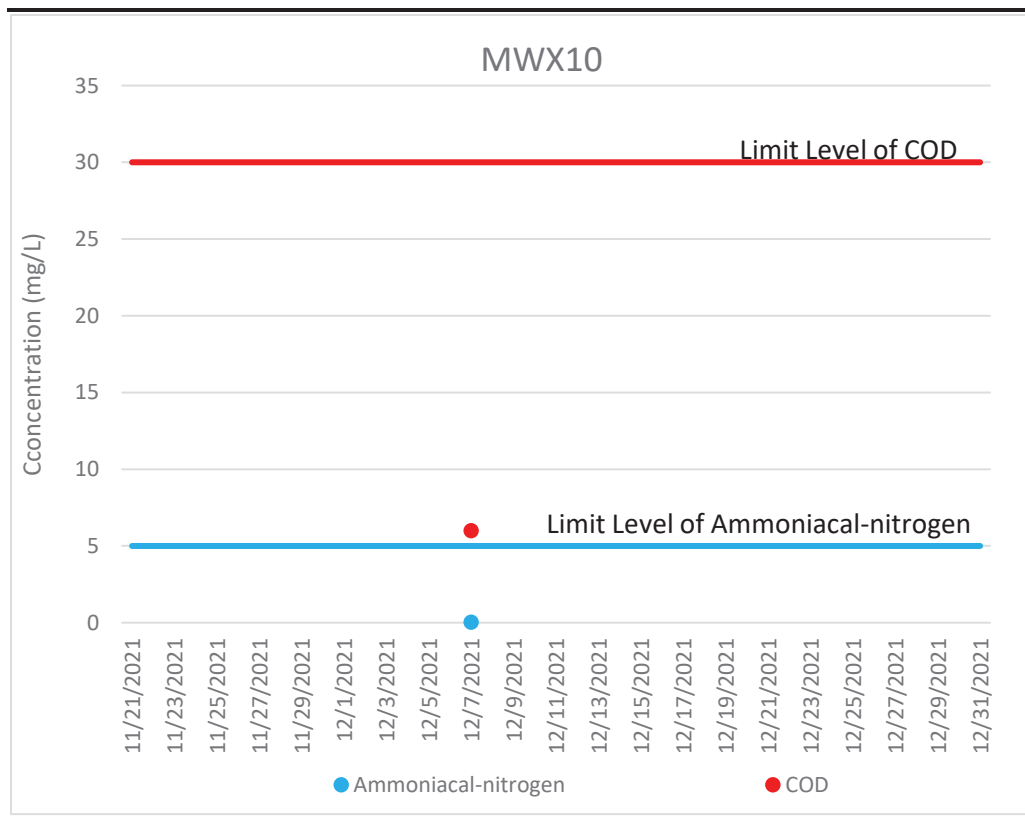


Figure F5.11 Graphical Presentation for Groundwater Monitoring (MWX-11)

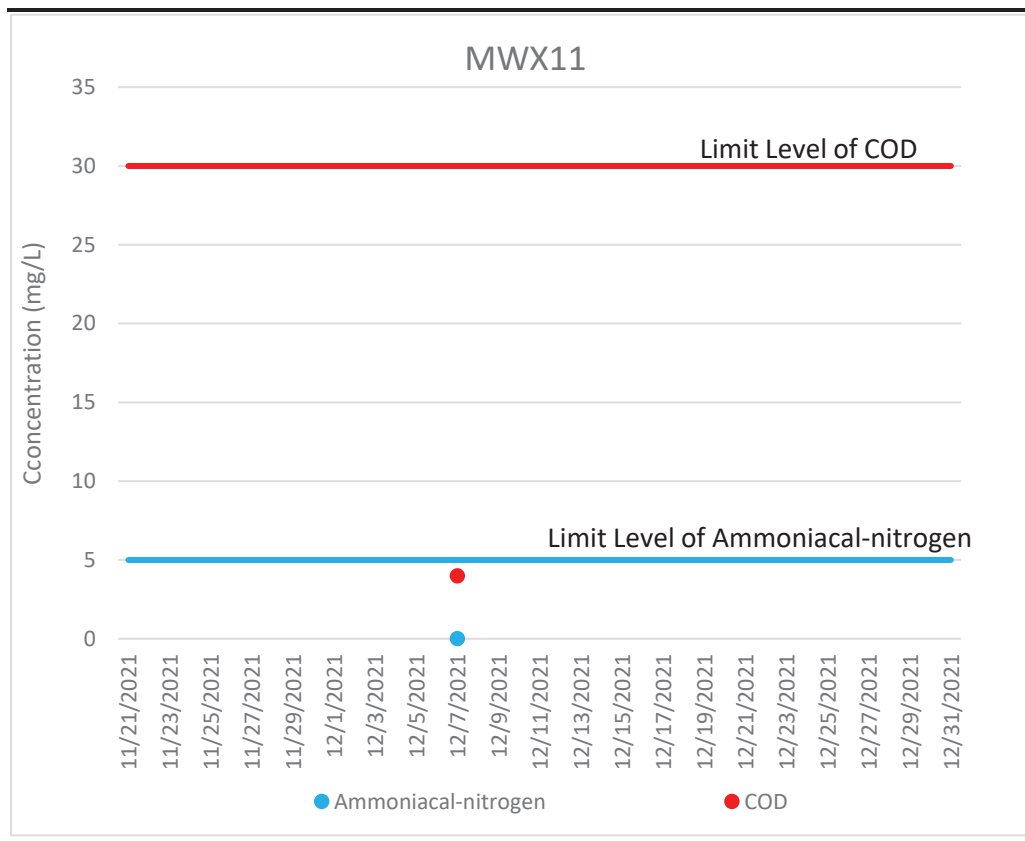


Figure F5.12 Graphical Presentation for Groundwater Monitoring (MWX-12)

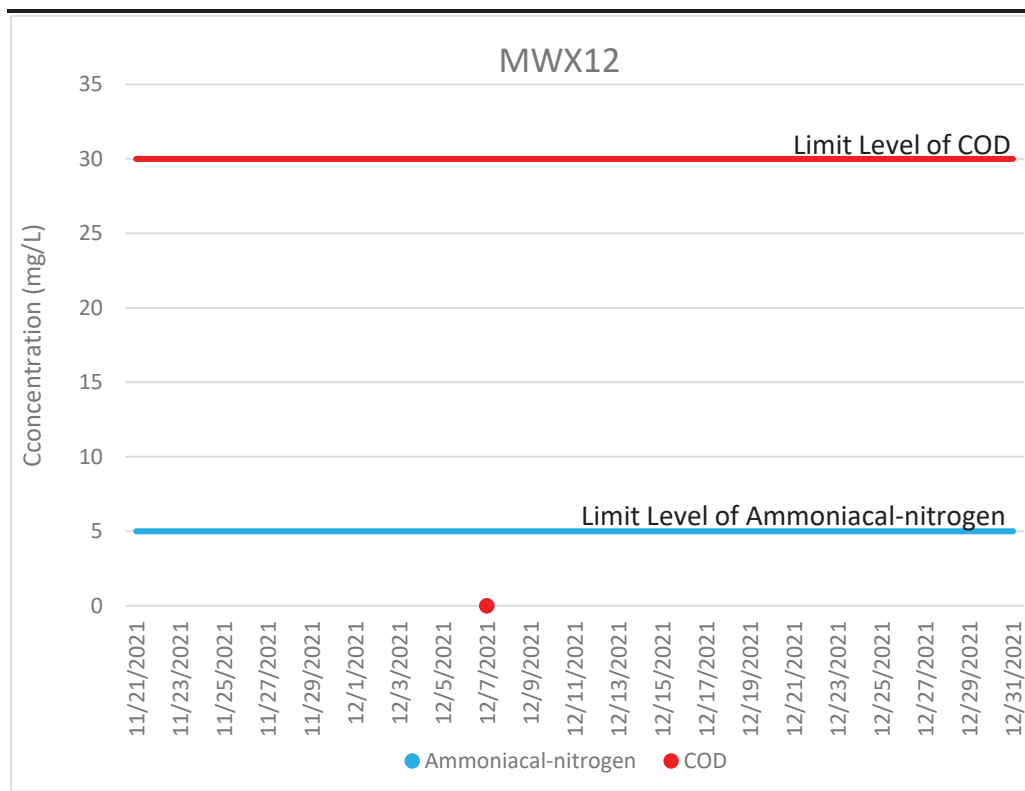


Figure F5.13 Graphical Presentation for Groundwater Monitoring (MWX-13)


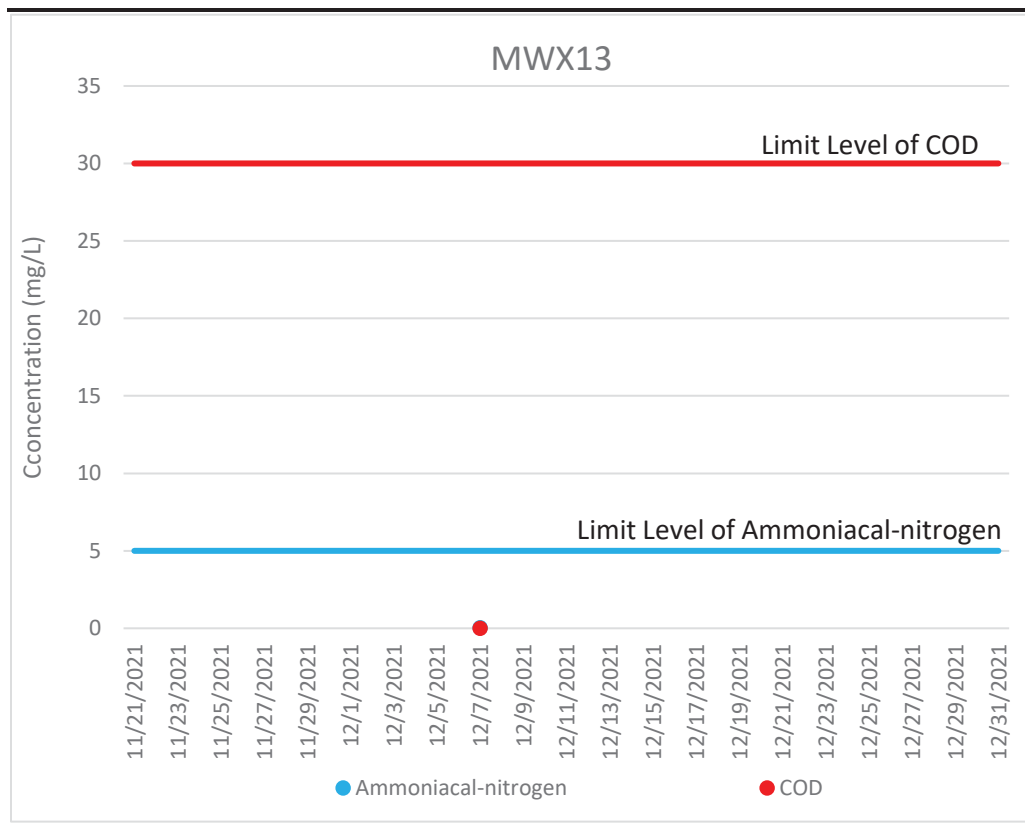


Figure F5.14 Graphical Presentation for Groundwater Monitoring (MWX-14)



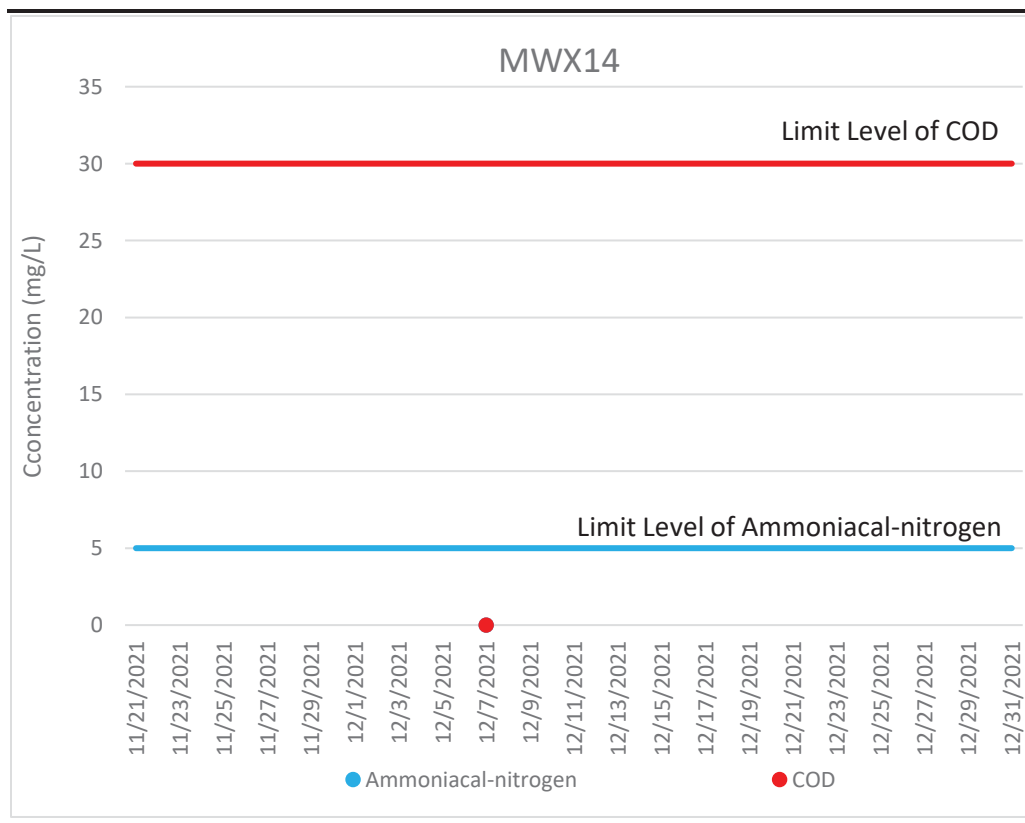

Annex F6

# Investigation Reports of Environmental Quality Limit Exceedance

## Investigation Report of Environmental Quality Limit Exceedance

Project	South East New Territories (SENT) Landfill Extension
Date	8 December 2021
Time	10:15
Monitoring Location	MWX-6
Parameter	Chemical Oxygen Demand (COD)
Action / Limit Levels	>46 mg /L
Measured Level	56 mg /L
Possible reason	<p>Groundwater contaminated with leachate is commonly characterized by high COD and ammoniacal-nitrogen levels as a result of degradation of organic matters in the waste. The groundwater quality (ammoniacal-nitrogen) monitoring results at MWX-6 (3.52mg/L) and groundwater quality (COD) monitoring results of the groundwater monitoring wells adjacent to MWX-6 (MWX-5: 28 mg/L and MWX-7: 23 mg/L) are well within the respective limit levels. In addition, no exceedance of COD Limit Levels for groundwater monitoring at other monitoring wells was recorded in the sampling event. Hence, there is a low possibility of the slight elevation of COD level at MWX-6 is due to leachate contamination from SENTX operation or at least it is not conclusive to base on this result to demonstrate exceedance is due to leachate contamination.</p> <p>In accordance with Table 4.5b of the updated EM&amp;A Manual, repeat measurement was conducted on 4 January 2022 to confirm findings. COD concentration of 44 mg/L (below Limit Level) was measured during the sampling event, which demonstrates no consecutive groundwater quality impact at MWX-6.</p> <p>In addition, in accordance with the findings of the desktop review commissioned by GVL and EPD (the Employer) in May 2021 to investigate the potential sources of the elevated methane levels at the perimeter landfill gas monitoring wells at SENTX, pockets of organic matters are identified in the fill materials of the SENTX site upon review of the historical site investigation borehole logs at the Project Site area. It is possible that the elevated COD concentration measured at MWX-6 (in close proximity to LFG13, which shows elevated methane levels continuous) on 8 December 2021 could be due to localised organic matters within or around the monitoring well.</p> <p>Due to the presence of influencing factor from non-project source; the COD levels at all other groundwater monitoring wells are within the respective limit level, and the subsequent month monitoring results at MWX-6 did not show exceedance, there is no adequate evidence showing that the COD level exceedance measured at MWX-6 on 8 December 2021 was deemed to Project-</p>

	related activities.
Action Taken / Action to be Taken	Examination of environmental performance of the Project will be continued during the weekly inspections. The Contractor is reminded to implement relevant and appropriate mitigation measures according to the updated EM&A Manual to avoid any exceedance of the Action and Limit Levels.
Remarks	-


Prepared by: Abbey Lau  
Designation: Environmental Team  
Date: 26 January 2022

Annex G

## Landfill Gas

Annex G1

Landfill Gas Monitoring  
Locations for Service Voids,  
Utilities and Manholes  
along the Site Boundary and  
Within the SENTX Site

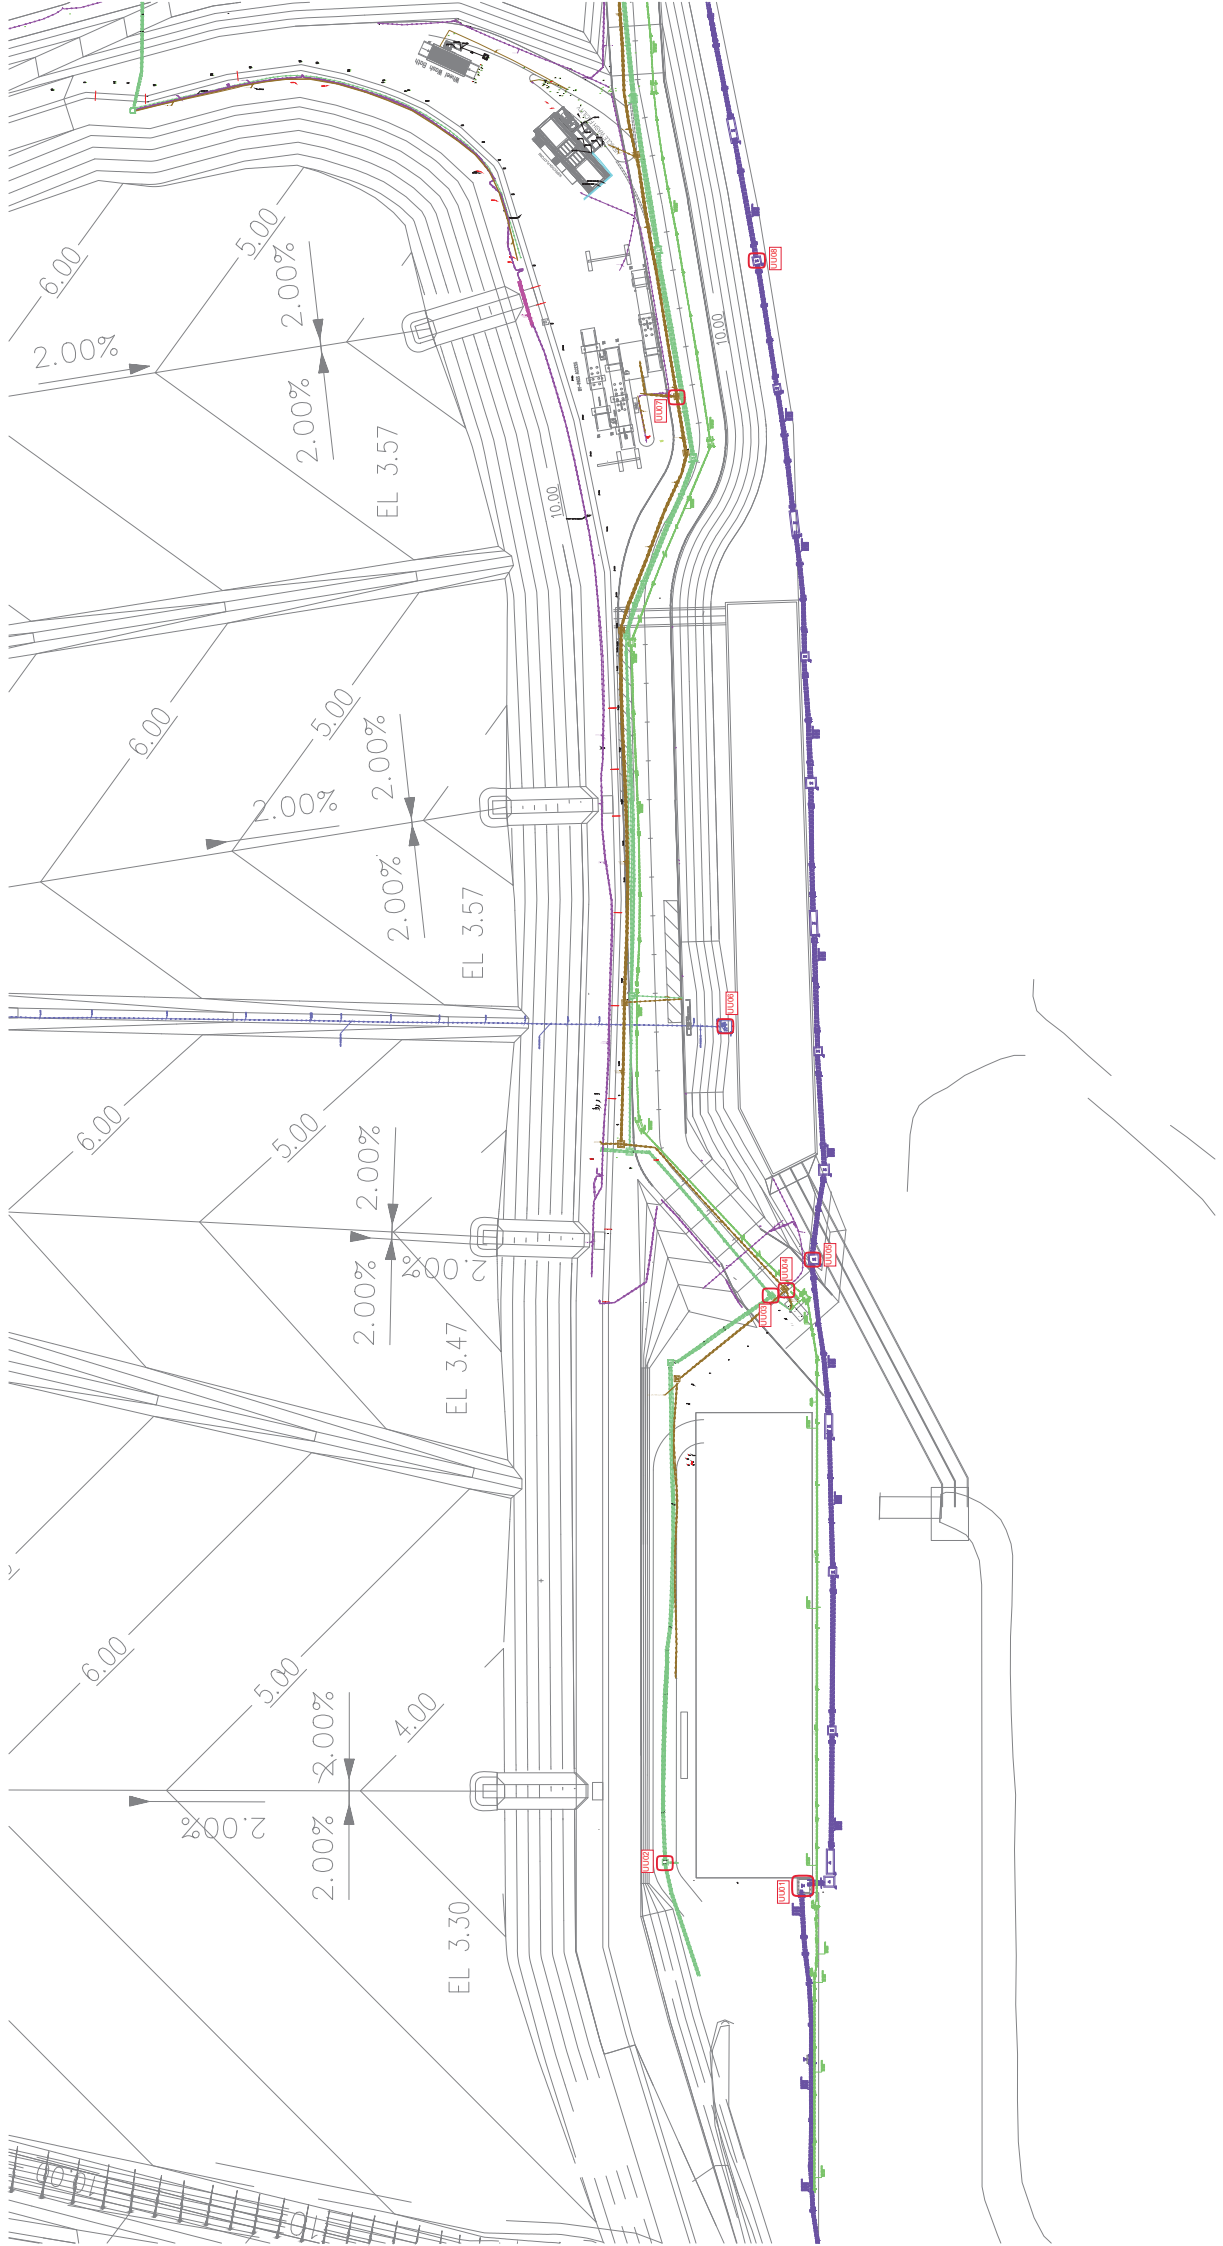



Annex G2

## Landfill Gas Monitoring Results



**Table G2.1 Landfill Gas Monitoring Results at Perimeter LFG Monitoring Wells**

Location	Water Level (mPD)	Methane (% (v/v))	Carbon Dioxide (% (v/v))	Oxygen (% (v/v))
LFG1	2.40	0.0	0.1	18.9
LFG2	2.30	0.0	0.1	19.9
LFG3	2.33	0.0	0.9	17.4
LFG4	2.32	0.0	0.0	20.1
LFG5	2.65	0.0	0.2	7.2
LFG6	2.29	0.0	0.1	19.3
LFG7	2.48	0.0	0.0	17.6
LFG8	2.42	0.0	0.0	19.3
LFG9	2.38	0.0	0.1	8.8
LFG10	2.12	0.0	0.0	18.0
LFG11	2.29	0.0	0.1	7.8
LFG12	2.23	0.0	0.0	19.6
LFG13	2.07	19.6	0.0	0.4
LFG14	1.81	0.0	0.0	16.2
LFG15	2.05	1.8	0.4	12.7
LFG16	2.19	0.0	0.1	18.6
LFG17	2.38	0.0	0.2	0.8
LFG18	2.59	0.0	0.1	19.3
LFG19	2.74	0.0	0.1	3.6
LFG20	2.80	0.0	1.1	17.0
LFG21	2.85	0.0	2.0	9.7
LFG22	2.62	0.0	1.0	16.3
LFG23	12.52	0.0	2.1	18.1
LFG24	6.33	0.0	0.9	19.0
GP1	Probe bent	0.2	5.2	14.6
GP2 (shallow)	Probe bent	0.5	0.3	19.2
GP2 (deep)	Probe bent	0.2	0.1	19.6
GP3 (shallow)	Probe bent	0.3	2.5	14.4
GP3 (deep)	Probe bent	0.1	0.2	19.3
GP4 (shallow)	Probe bent	0.6	0.7	19.0
GP4 (deep)	Probe bent	0.7	1.7	17.4
GP5 (shallow)	Probe bent	0.1	5.4	16.8
GP5 (deep)	38.80	0.1	0.3	19.5
GP6	37.19	0.0	5.6	14.4
GP7	36.21	0.0	0.1	20.0
GP12	1.83	0.0	0.0	20.1
GP15	2.34	0.0	0.0	20.0
P7	2.32	0.0	0.0	20.0
P8	2.44	0.0	0.0	20.1
P9	2.26	0.0	0.0	20.1

**Table G2.2** *Landfill Gas Monitoring Results at Service Voids, Utilities Pits and Manholes*

<b>Location</b>	<b>Methane (% (v/v))</b>	<b>Carbon Dioxide (% (v/v))</b>	<b>Oxygen (% (v/v))</b>
UU01	0.1	0.0	20.7
UU02	0.0	0.0	20.7
UU03	0.0	0.0	20.5
UU04	0.1	0.0	20.6
UU05	0.0	0.0	20.6
UU06	0.0	0.0	20.5
UU07	0.1	0.0	20.4
UU08	0.0	0.0	20.5
UU09	0.2	0.0	20.1
UU10	0.1	0.0	20.3
UU11	Inaccessible due to on-going construction work		
UU12	Inaccessible due to on-going construction work		
UU13	Inaccessible due to on-going construction work		
UU14	Inaccessible due to on-going construction work		
UU15	0.1	0.0	20.2
UU16	0.1	0.0	20.3
UU17	0.3	0.0	20.3
UU18	0.1	0.0	20.3
UU19	0.0	0.0	20.7
UU20	0.1	0.0	20.3
UU21	0.0	0.0	19.4
UU22	0.0	0.0	19.3
UU23	0.0	0.0	19.3
UU24	0.0	0.0	19.3
UU25	0.0	0.0	19.2
UU26	0.0	0.0	20.1
UU27	0.0	0.0	19.5
UU28	0.0	0.0	19.8

Annex G3

## Event and Action Plan for Landfill Gas Monitoring

### Annex G3 Event and Action Plan for Landfill Gas Monitoring

Event	Action		
	ET	IEC	Contractor
Limit Level being exceeded for field monitoring at the perimeter monitoring wells	<ul style="list-style-type: none"> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to daily if exceedance is due to the Project for monitoring wells in the areas where there is development within 250m of the SENTX Site Boundary and to weekly for other monitoring wells, until no exceedance of limit level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Repeat field measurement to confirm findings</li> <li>Check the performance of landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Discuss with the ET and IEC and submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>
Limit Level being exceeded for the bulk gas sampling at the perimeter monitoring wells	<ul style="list-style-type: none"> <li>Check and compare the results of field monitoring and laboratory analyse of bulk samples</li> <li>If the results of field monitoring also show exceedance, the action(s) for limit level being exceeded for field monitoring would have been triggered</li> <li>If the results of field monitoring does not show exceedance, the sampling procedures should be checked and if deems necessary, to repeat the monitoring and recalibrate the portable monitoring instruments</li> <li>Notify the above findings to Contractor and IEC</li> </ul>	<ul style="list-style-type: none"> <li>Verify the findings by ET</li> </ul>	<ul style="list-style-type: none"> <li>Nil</li> </ul>

Event	Action		
	ET	IEC	Contractor
Limit Level being exceeded at the permanent gas monitoring system	<ul style="list-style-type: none"> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check the methane gas level at the perimeter monitoring wells, manholes or utilities duct</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Evacuate all staff in the concerned building</li> <li>Open the doors and window of all rooms on the ground floor</li> <li>Do not allow staff to go back to the room if methane level is higher than 1 % gas</li> <li>Check the performance of the landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>
Limit Level being exceeded during surface emission monitoring	<ul style="list-style-type: none"> <li>Repeat the measurement to confirm findings</li> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to monthly if exceedance is due to the Project until no exceedance of limit level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>Audit the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Check landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Consider changes of working methods</li> <li>Discuss with the ET and IEC and submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>

Event	Action		
	ET	IEC	Contractor
Limit Level being exceeded at the service voids, utilities pits, manholes and location of vegetation stress	<ul style="list-style-type: none"> <li>Repeat the measurement to confirm findings</li> <li>Investigate the cause(s) of exceedance</li> <li>Prepare the Notification of Exceedance within 24 hours</li> <li>Check monitoring data, all plant, equipment and the Contractor's working methods</li> <li>Inform Contractor, IEC, Project Proponent and EPD (EIAO Authority) whether the cause of exceedance is due to the Project</li> <li>Discuss with Contractor and IEC for remedial measures required</li> <li>Ensure remedial measures are properly implemented</li> <li>Increase the monitoring frequency to weekly if exceedance is due to the Project until no exceedance of limit level</li> </ul>	<ul style="list-style-type: none"> <li>Verify the Notification of Exceedance</li> <li>Discuss with ET and Contractor on proposed remedial measures</li> <li>Review proposals on remedial measures</li> <li>Audit the implementation of the remedial measures</li> <li>the effectiveness of the implemented remedial measures</li> </ul>	<ul style="list-style-type: none"> <li>Check landfill gas management system</li> <li>Rectify unacceptable practice</li> <li>Discuss with the ET and IEC and submit proposals for remedial measures to IEC</li> <li>Implement the agreed proposals</li> <li>Amend proposal if appropriate</li> </ul>

Annex H

Cumulative Statistics on  
Exceedances,  
Environmental Complaints,  
Notification of Summons  
and Status of Prosecutions

**Table H1** *Cumulative Statistics on Exceedances*

		Total No. recorded in this reporting period	Total No. recorded since project commencement
Air Quality (Dust)	Action	0	0
	Limit	1	1
Air Quality (Odour)	Action	0	0
	Limit	0	0
Air Quality (Emissions of Thermal Oxidiser)	Limit	0	0
Air Quality (Emissions of Landfill Gas Flare)	Limit	1	1
Air Quality (Emissions of Landfill Gas Generator)	Limit	0	0
Noise	Action	0	0
	Limit	0	0
Water Quality (Surface Water)	Limit	0	57
Water Quality (Leachate)	Limit	0	0
Water Quality (Groundwater)	Limit	1	1
Landfill Gas (Perimeter Landfill Gas Monitoring Wells)	Limit	0	0
Landfill Gas (Service Void, Utilities and Manholes)	Limit	0	0
Landfill Gas (Permanent Gas Monitoring System)	Limit	0	0

**Table H2** *Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions*

Reporting Period	Cumulative Statistics		
	Complaints	Notifications of Summons	Prosecutions
This Reporting Period (1 Oct 2021 - 31 Dec 2021)	0	0	0
Total no. received since project commencement	1	0	0